


ORDER NO.ITD0603006CE

Plasma Television
TH-42PV60A / TH-42PV60H / TH-42PV60M / TH-42PV60MT
GP9DE Chassis

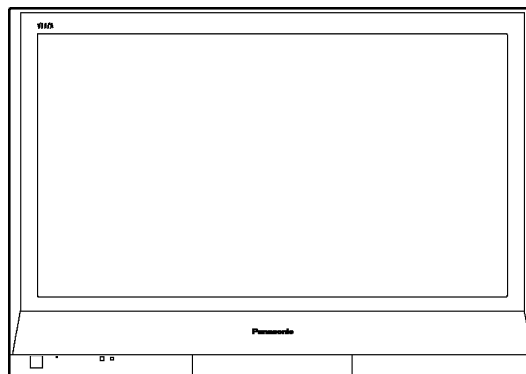

SPECIFICATIONS

Specifications

Power Source	AC 220-240 V, 50 / 60 Hz
Power Consumption	
Average use	341 W
Standby condition	0.3 W
Plasma Display panel	
Drive method	AC type
Aspect Ratio	16:9
Contrast Ratio	Max 10000:1
Visible screen size / (No. of pixels)	106 cmV 920 mm (W) × 518 mm (H) × 1,056 mm (diagonal) 786,432 (1,024 (W) × 768 (H)) [3,072 × 768 dots]
Sound	
Speaker	12 cm × 6 cm × 2 pcs, 8 Ω
Audio Output	20 W (10 W + 10 W), 10% THD
Headphones	M3 (3.5 mm) Jack × 1
Video signals	VGA, SVGA, XGA

♦ ♦ ♦ ♦ ♦

SXGA (compressed)
Horizontal scanning frequency 31 - 69 kHz
Vertical scanning frequency 59 - 86 Hz

Receiving Systems / / Band name (PV60A)

1. PAL B/G	Reception of Off air broadcasts
2. NTSC 4.43	Playback from Video Tape Recorders
3. NTSC 3.58	Playback from Special Video Tape Recorders and Special Video Disc Players
4. PAL 60Hz	(Via the AV Sockets) only.

Receiving Channels (PV60A)

VHF 0 to 12	PAL B
UHF 21 to 69	PAL G
S'1 to S'3	HYPER TUNER
S1 to S41	(One tuner)

Receiving Systems / / Band name (PV60H/M/MT)

17 Systems	Function	17 Systems	Function
1 PAL B, G, H	Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders	8 NTSC 4.43/5.5 MHz	Playback from Special VCR's or DVI
2 PAL I		9 NTSC 4.43/6.0 MHz	
3 PAL D, K		10 NTSC 4.43/6.5 MHz	
4 SECAM B, G		11 NTSC 3.58/5.5 MHz	
5 SECAM D, K		12 NTSC 3.58/6.0 MHz	
6 SECAM K1		13 NTSC 3.58/6.5 MHz	
7 NTSC M (NTSC 3.58/4.5 MHz)		14 SECAM I	
		15 PAL 60 Hz/5.5 MHz	Playback from Special Disc Players and Special VCR's or DVD
		16 PAL 60 Hz/6.0 MHz	
		17 PAL 60 Hz/6.5 MHz	

Receiving Channels / Regular TV (PV60H/M/MT)

VHF BAND	UHF BAND	CATV
2-12(PAL/SECAM B,K1)	21-69(PAL,G,H,I/SECAM G,K,K1)	S1-S20(OSCAR)
0-12(PAL B AUST.)	28-69(PAL B AUST.)	1-125(USA CATV)
1-9(PAL B N.Z.)	13-57(PAL D,K)	C13-C49(JAPAN)
1-12(PAL/SECAM D)	13-62(NTSC M Japan)	S21-S41(HYPER)
1-12(NTSC M Japan)	14-69(NTSC M USA)	Z1-Z37(CHINA)
2-13(NTSC M USA)		5A,9A(AUST.)

Serial - Rear

Operating Conditions

VHF / UHF
Temperature : 0 °C - 40 °C
Humidity : 20 % - 80 % RH (non-condensing)

Connection Terminals

AV1	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
Input	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	S VIDEO	Mini DIN 4-pin	Y: 1.0 V[p-p] (75 Ω) C: 0.286 V[p-p] (75 Ω)
AV2	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
Input	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	COMPONENT	Y	1.0 V[p-p] (including synchronization)
		PB/CB, PR/CR	±0.35 V[p-p]
AV3	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
Input	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	COMPONENT	Y	1.0 V[p-p] (including synchronization)
		PB/CB, PR/CR	±0.35 V[p-p]
AV4	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
Input	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	S VIDEO	Mini DIN 4-pin	Y: 1.0 V[p-p] (75 Ω) C: 0.286 V[p-p] (75 Ω)
Others	HDMI1/2 Input	TYPE A Connectors	
	PC Input	HIGH-DENSITY D-SUB 15PIN	R,G,B/0.7 V[p-p] (75 Ω)
			HD,VD/TTL Level 2.0-5.0 V[p-p] (high impedance)
	Audio Input	RCA PIN Type × 2	0.5 V[rms]
Monitor	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms] (high impedance)
Output	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
Dimensions (W × H × D)		1,020 mm × 705 mm × 95 mm	
Weight		30.0 kg Net	

Notes:

-Design and Specifications are subject to change without notice. Weight and Dimensions shown are approximate.

**© 2006 Matsushita Electric Industrial Co., Ltd. All rights reserved.
Unauthorized copying and distribution is a violation of law.**

1. Applicable signals

* Mark: Applicable input signal for Component (Y, PB/CB, PR/CR), HDMI and PC (D-sub 15P)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)	Component	HDMI	PC
525 (480) / 60i	15.73	59.94	*	*	
525 (480) / 60p	31.47	59.94	*	*	
625 (576) / 50i	15.63	50.00	*	*	
625 (576) / 50p	31.25	50.00	*	*	
750 (720) / 60p	45.00	60.00	*	*	
750 (720) / 50p	37.50	50.00	*	*	
1,125 (1,080) / 60i	33.75	60.00	*	*	
1,125 (1,080) / 50i	28.13	50.00	*	*	
640 x 400 @ 70 Hz	31.46	70.07			*
640 x 480 @ 60 Hz	31.47	59.94			*
640 x 480 @ 75 Hz	37.50	75.00			*
800 x 600 @ 60 Hz	37.88	60.32			*
800 x 600 @ 75 Hz	46.88	75.00			*
800 x 600 @ 85 Hz	53.67	85.06			*
1,024 x 768 @ 60 Hz	48.36	60.00			*
1,024 x 768 @ 70 Hz	56.48	70.07			*
1,024 x 768 @ 75 Hz	60.02	75.03			*
1,024 x 768 @ 85 Hz	68.68	85.00			*
1,280 x 1,024 @ 60 Hz	63.98	60.02			*
Macintosh13" (640 x 480)	35.00	66.67			*
Macintosh16" (832 x 624)	49.72	74.54			*
Macintosh21" (1,152 x 870)	68.68	75.06			*

Note: Signals other than above may not be displayed properly.

The above signals are reformatted for optimal viewing on your display.

2. Safety Precautions

2.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in **Figure 1**.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to


- measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
 5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
 6. The potential at any point (TOUGH CURRENT) expressed as voltage U_1 and U_2 , does not exceed the following values:
 For a. c.: $U_1 = 35 \text{ V (peak)}$ and $U_2 = 0.35 \text{ V (peak)}$;
 For d. c.: $U_1 = 1.0 \text{ V}$,

Note:

The limit value of $U_2 = 0.35 \text{ V (peak)}$ for a. c. and $U_1 = 1.0 \text{ V}$ for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35 \text{ V (peak)}$ for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz .

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

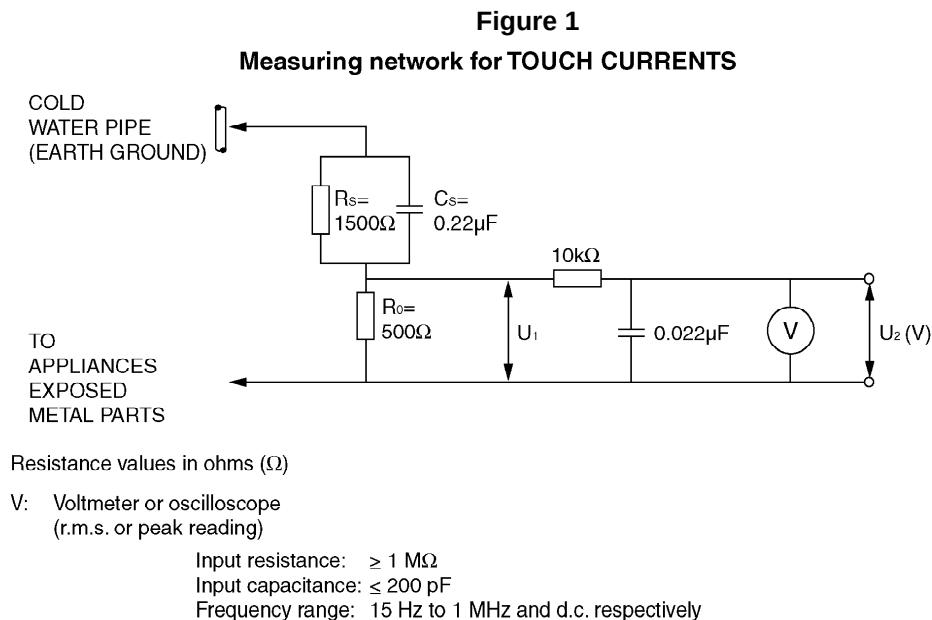

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

3. Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical

ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a

carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu). That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in its manufacture due to environmental conservation issues.

For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol



stamped on the back of PCB.




Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

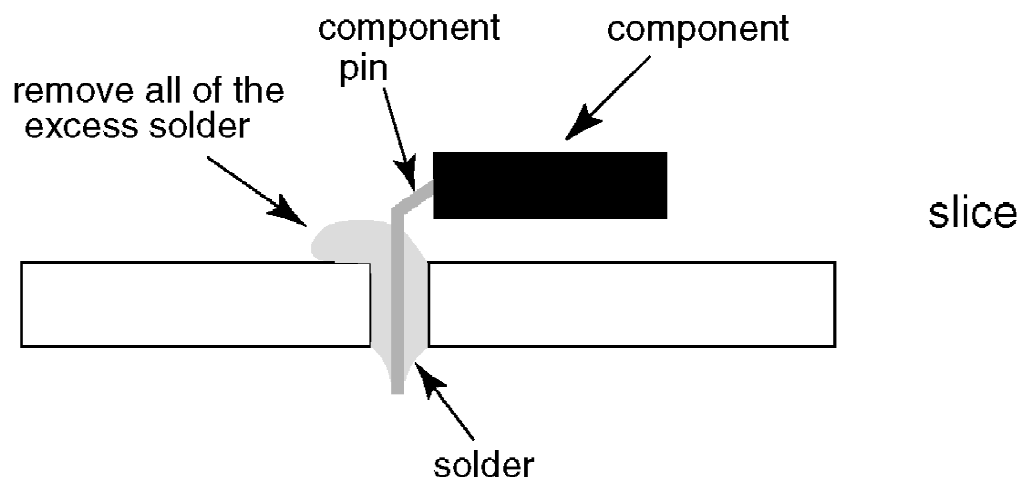


Suggested Pb free solder


There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

5. Service Hint

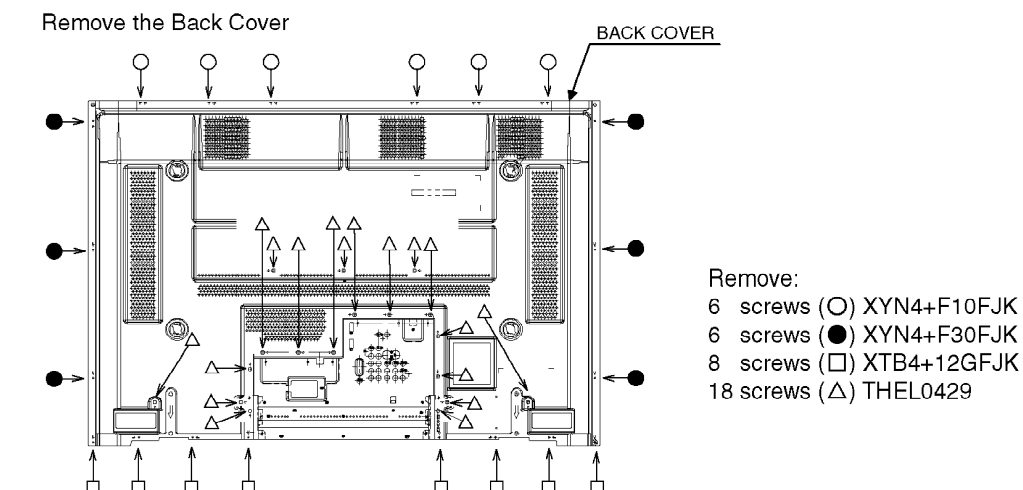

Service Position

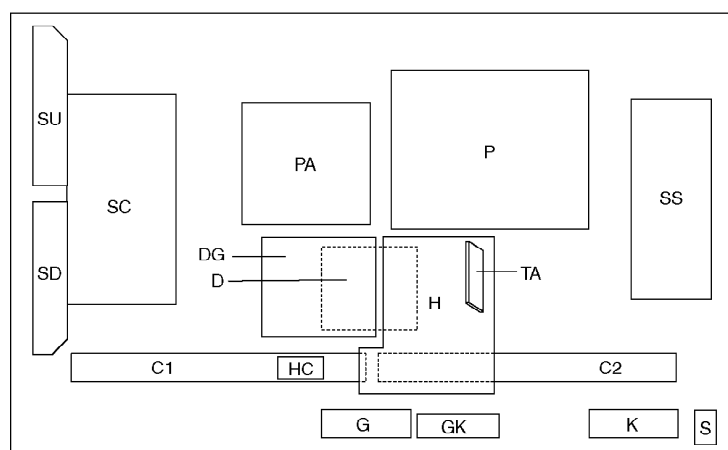

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Lower Right)
PA	DC-DC Converter, Speaker out, Audio AMP, / Fan Control	C2	Data Driver (Lower Left)
H	AV Terminal, AV Switch, MSP	SC	Scan Drive
TA	Tuner	SU	Scan out (Upper)
DG	Digital Signal Processor, Micom, HDMI Interface	SD	Scan out (Lower)
D	Format Converter, Plasma AI, Sub-Field Processor	SS	Sustain Drive
HC	Jig Connection	K	Remote receiver, Power LED
		S	Power Switch
		G	Front Terminal
		GK	Key Switch

6. Plasma panel replacement method


6.1. Remove the Back cover

1. See Service Hint (Section 5)

6.2. Remove the fan

1. Disconnect the relay couplers.


2. Remove the screws (×3➡) and remove the fans.

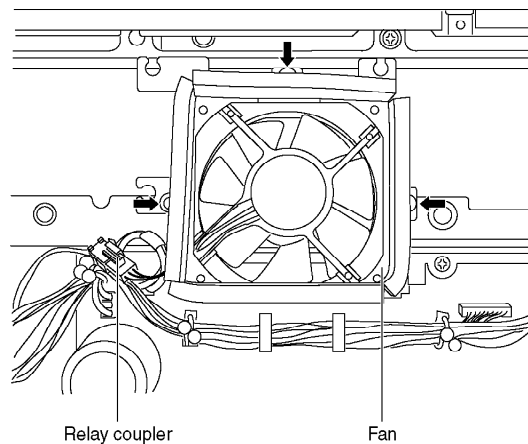

6.3. Remove the tuner cover

1. Remove the screws (×7➡, ×4➡, ×2 , ×2 , ×2 ).

2. Remove the tuner cover.

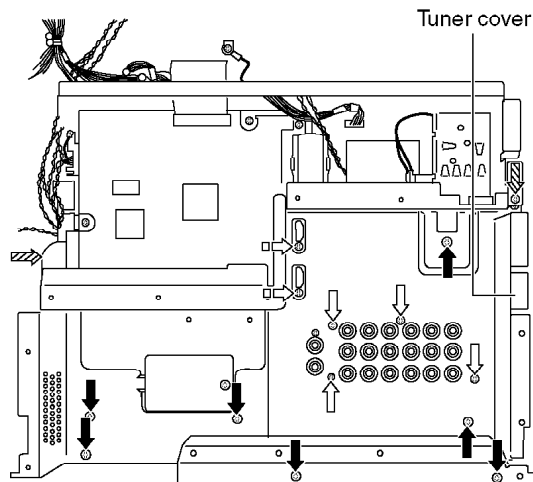


6.4. Remove the P-Board

Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


1. Unlock the cable clampers to free the cable.

2. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23, and P25).
3. Remove the screws (×5➡, ×1⇐) and remove the P-Board.

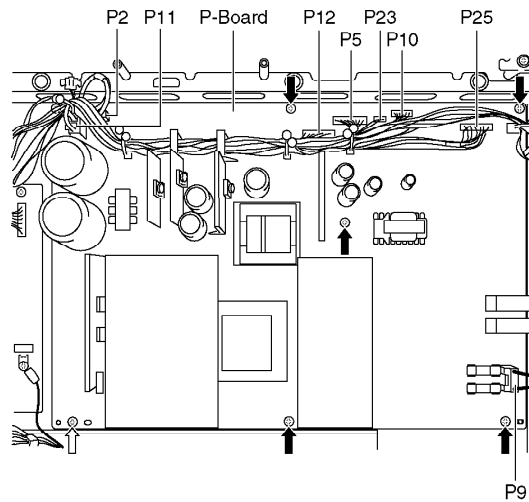

6.5. Remove the PA-Board


1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (PA2, PA5, PA10, PA31, PA32, PA33, PA34 and PA40).
3. Disconnect the flexible cable (PA20).
4. Remove the screws (×4➡) and remove the earth cable.
5. Remove the PA-Board.

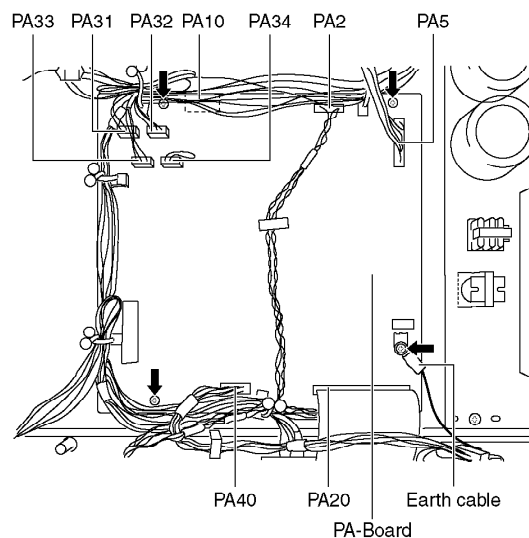

6.6. Remove the tuner unit


1. Unlock the cable clampers to free the cable.

2. Disconnect the couplers (DG5, G51 and PA40).
3. Disconnect the flexible cables (DG3 and PA20).
4. Remove the screws (×4➡) remove the tuner unit.

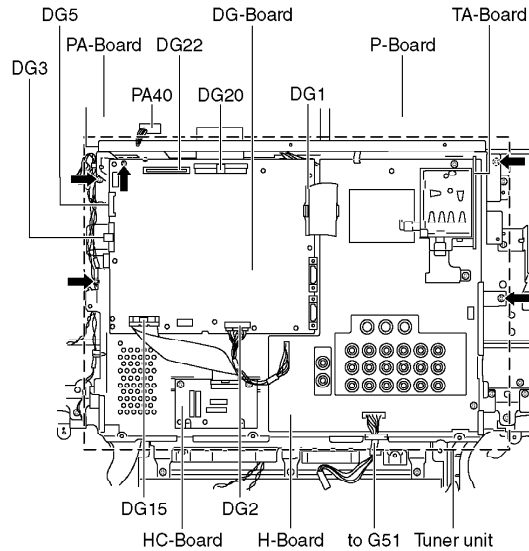


6.7. Remove the DG-Board

1. Disconnect the coupler (DG2).
2. Disconnect the flexible cables (DG1, DG15 and DG20).
3. Remove the screw (×7➡) remove the DG-Board.

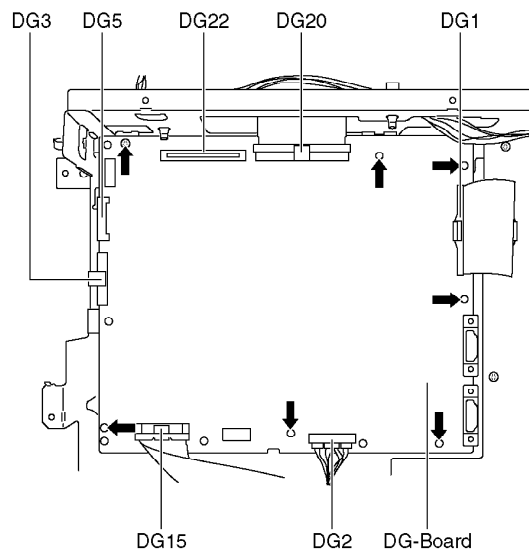


6.8. Remove the TA-Board

1. Disconnect the tuner cable.
2. Remove the screw (×1➡) and remove the TA-Board.

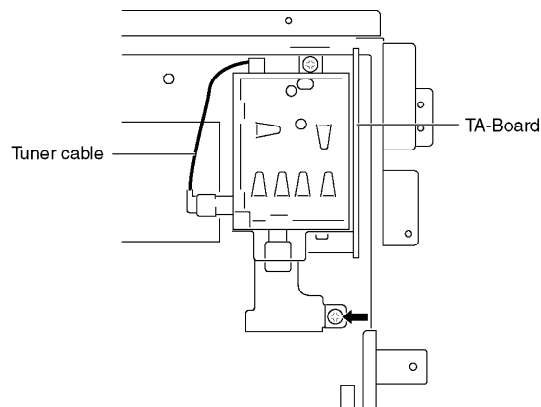


6.9. Remove the H-Board

1. Remove the TA-Board.
2. Unlock the cable clampers to free the cable.
3. Disconnect the couplers (H2, H40 and H51).
4. Disconnect the flexible cable (H1).
5. Remove the screws (×5➡) and remove the H-Board.

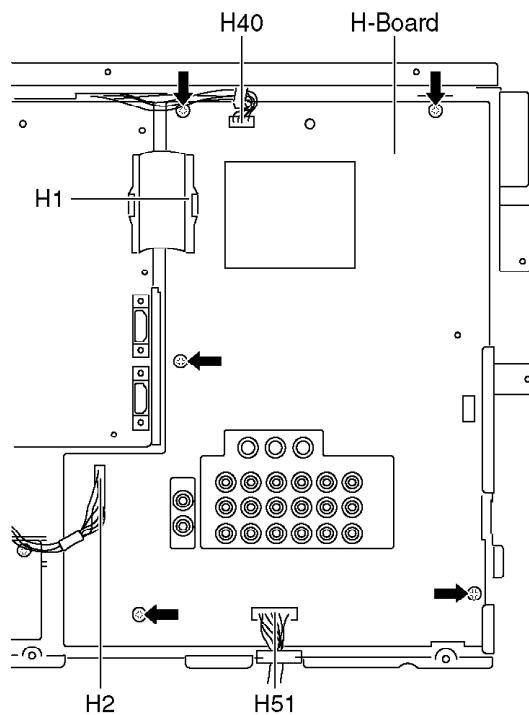


6.10. Remove the HC-Board

1. Disconnect the flexible cable (HC15).
2. Remove the screws (×2➡) and remove the HC-Board.

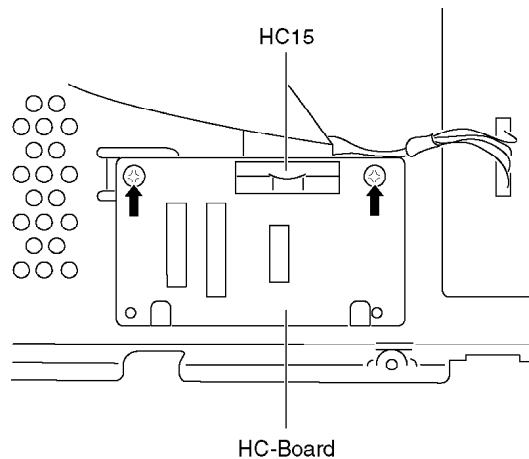


6.11. Remove the D-Board

1. Remove the tuner unit. (See section 6.6.)
2. Disconnect the couplers (D5, D20 and D25).
3. Disconnect the flexible cables (D3, D31 and D32).
4. Remove the screws (×4➡) and remove the D-Board.

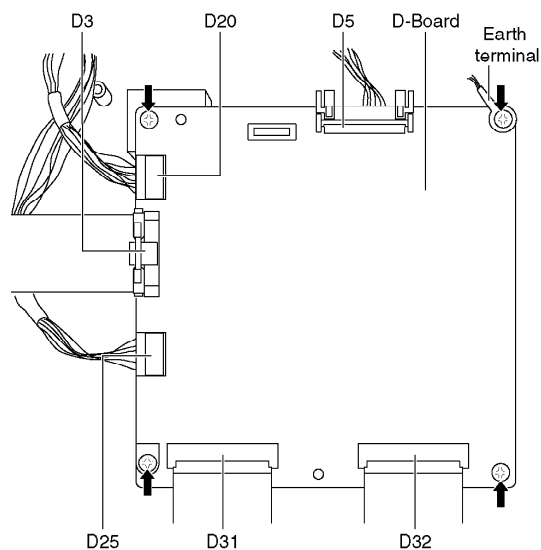


6.12. Remove the SU-Board

1. Remove the screws (×2➡).
2. Remove the flexible cables (SU1, SU2, SU3 and SU4) and remove the bridge connector (SU45).
3. Slide the SU-Board to the left to disconnect from a coupler (SC41-SU41) on the SC-Board and remove the SU-Board.

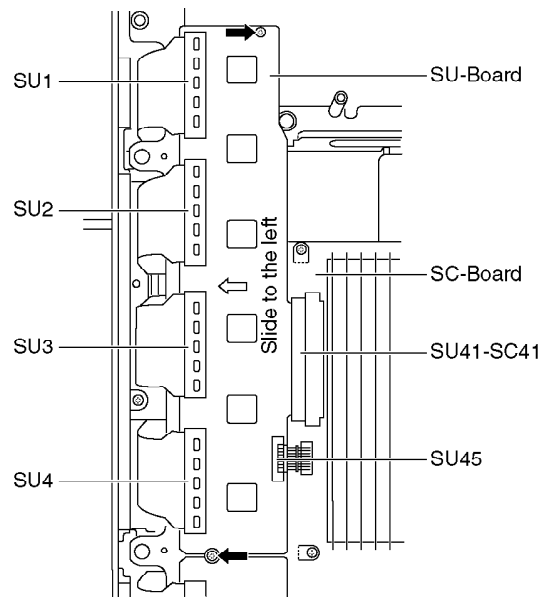

6.13. Remove the SD-Board


1. Remove the screws (×2➡).
2. Remove the flexible cables (SD1, SD2, SD3 and SD4) and remove the bridge connector (SD46).
3. Slide the SD-Board to the left to disconnect from a coupler (SC42-SD42) on the SC-Board and remove the SD-Board.

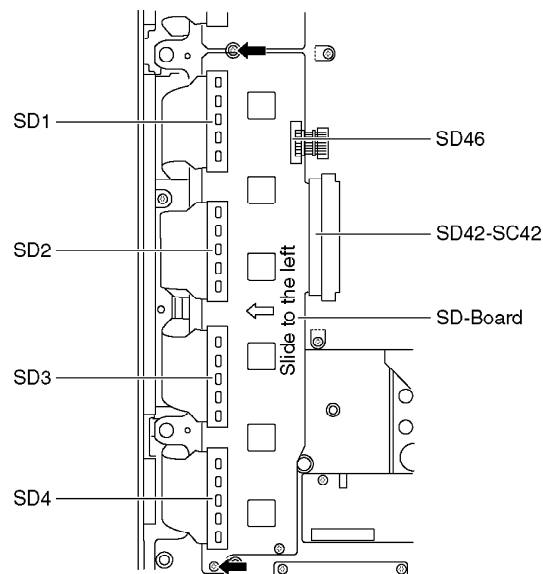

6.14. Remove the SC-Board


1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (SC2, SC20 and SC23).

3. Remove the screws (×6➡) and remove the SC-Board.

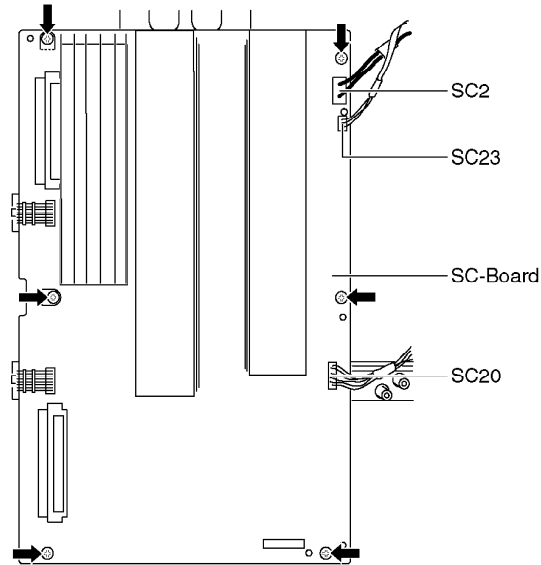

6.15. Remove the SS-Board


- 1. Disconnect the couplers (SS1, SS11, SS12 and SS23).**
- 2. Disconnect the flexible cables (SS41, SS42, SS43 and SS44).**
- 3. Remove the screws (×6➡) and remove the SS-Board.**

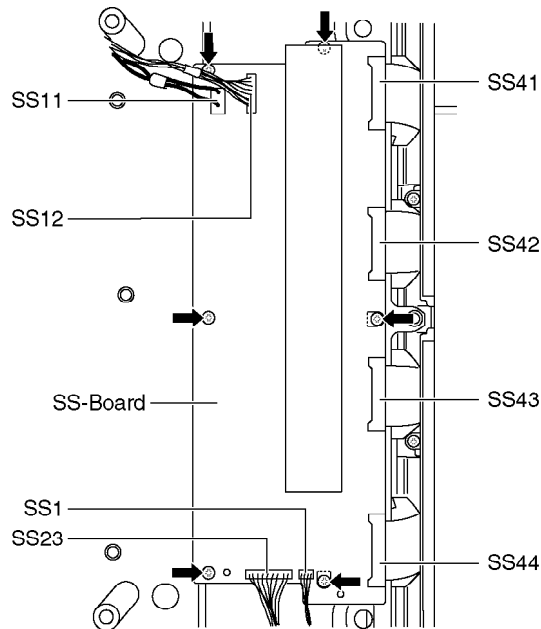

6.16. Remove the C1-Board


- 1. Remove the tuner unit. (See section 6.6.)**
- 2. Unlock the cable clampers to free the cable.**

3. Remove the flexible cables holder fastening screws (×8⇒).
4. Disconnect the flexible cables (CB1, CB2, CB3 and CB4).
5. Disconnect the flexible cables (C11 and C12).
6. Remove the screws (×4⇒) and remove the C1-Board.

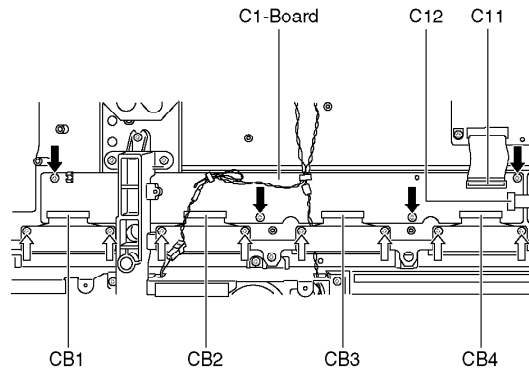


6.17. Remove the C2-Board

1. Remove the tuner unit. (See section 6.6.)
2. Unlock the cable clampers to free the cable.
3. Remove the flexible cables holder fastening screws (×8⇒).
4. Disconnect the flexible cables (CB5, CB6, CB7 and CB8).
5. Disconnect the flexible cables (C21 and C22).
6. Disconnect the coupler (C23).
7. Remove the screws (×4⇒) and remove the C2-Board.

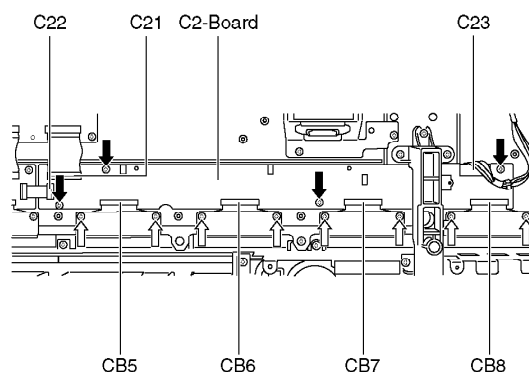


6.18. Remove the front bracket

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (G1 and G51).
3. Remove the screws (×5⇒) and remove the front bracket.

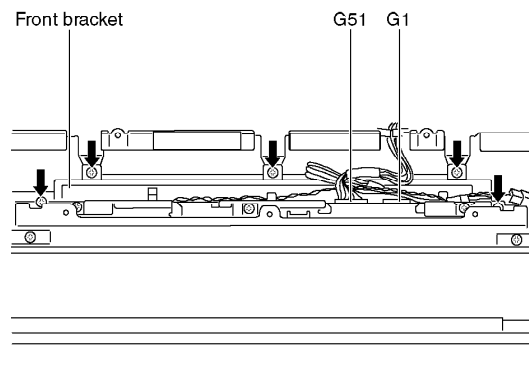


6.19. Remove the G-Board and GK-Board


1. Remove the front bracket. (See section 6.21.)
2. Remove the screws (×3→) and remove the metal cover.

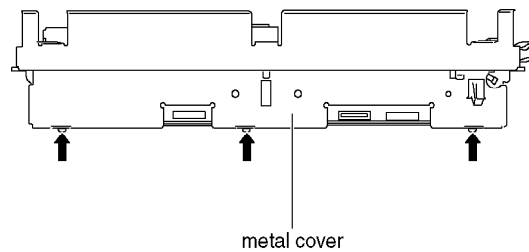

3. Remove the screws (×3→) and remove the front side metal frame.

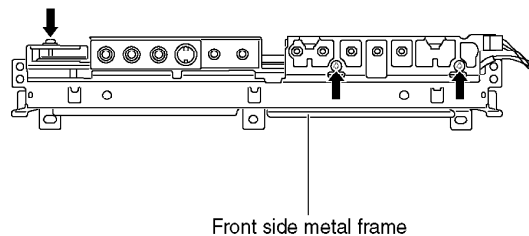


4. Remove the screws (×3→) and disconnect the couplers (G3-GK3).
5. Remove the G-Board and GK-Board.

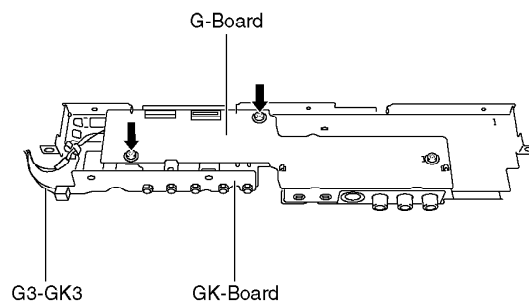


6.20. Remove the speaker L, R

1. Remove the sponge

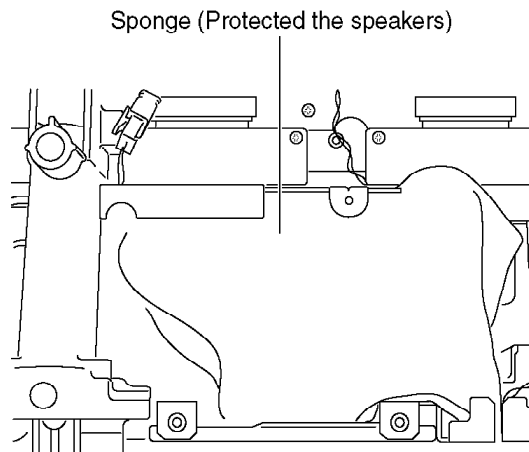

2. Disconnect the relay couplers

3. Remove the screws (×4➡) and remove the speaker L, R.

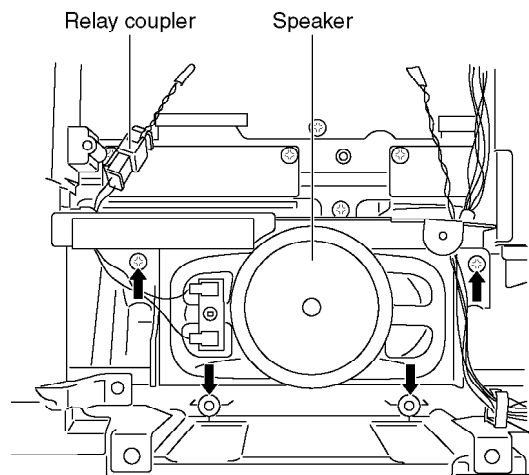


6.21. Remove the S-Board

1. Disconnect the coupler (S1).


2. Remove the screws (×2➡) and remove the S-Board metal frame.

3. Remove the screws (×2➡) and remove the S-Board.

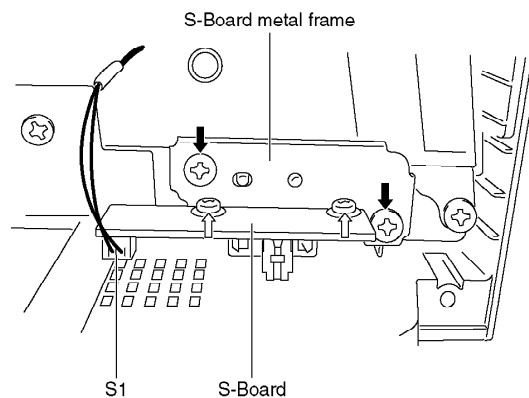


6.22. Remove the K-Board

1. Unlock the cable claspers to free the cable.
2. Disconnect the coupler (G1). (See section 6.21.)
3. Remove the screws (×2⇒) and remove the K-Board.

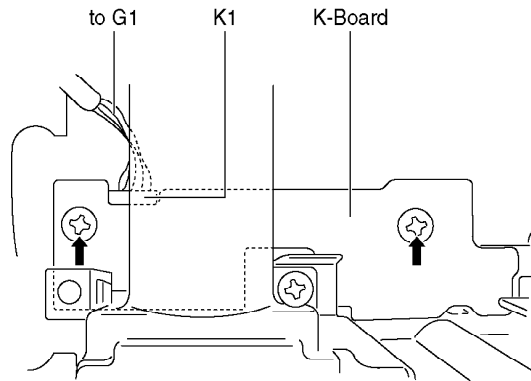


6.23. Remove the stand brackets

1. Remove the plasma panel section from the servicing stand and lay on a fiat surface such as a table (covered) with the plasma panel surface facing downward.
2. Remove the stand brackets (left, right) fastening screws (×5⇒ each) and remove the stand brackets (left, right).

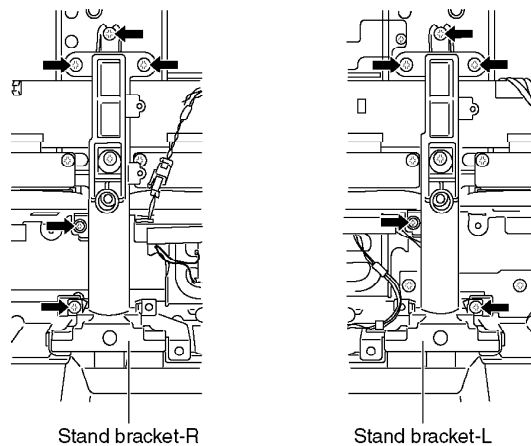


6.24. Remove the Plasma panel section from the Front frame (glass)

1. Remove the front frame and the plasma panel fastening screws (×6 ⇒).
2. Remove the front frame and the stand brackets fastening screws (×4⇒).

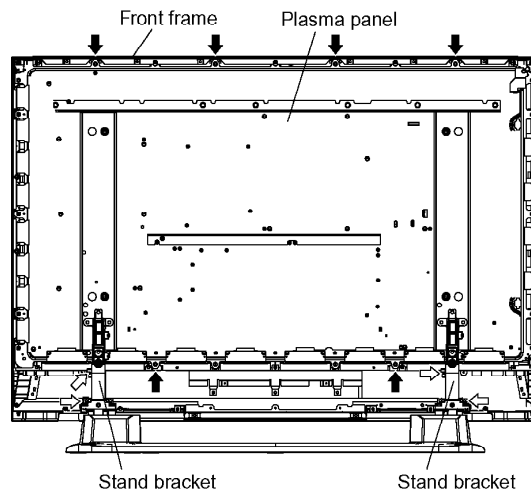

3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

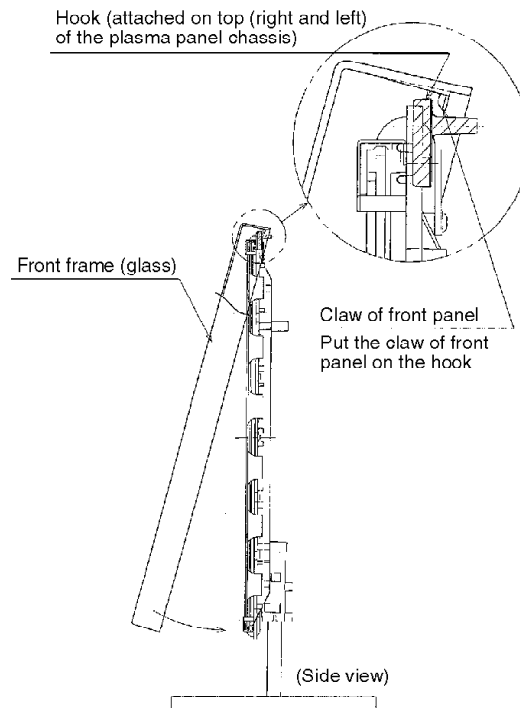

6.25. Replace the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1-Board and the C2-Board, connect the flexible cables (×8) from the Plasma panel to the C1-Board and the C2-Board, and fit the flexible cable holders.


3. Attach the Hooks (left, right) and fit the stand brackets (L, R) to the new plasma panel.
 4. Place the plasma panel section on the servicing stand.
 5. Attach the front frame and each P.C.Board and so on, to the new plasma panel.
- * When fitting the front frame, be careful to allow any debris, dust or handling residue to remain between the front glass and plasma panel.

7. Location of Lead Wiring

7.1. Lead of Wiring (1)

The wire is dressed as shown in figure.


NOTE: The earth terminal in the D5 lead wire is tightened in D board together.

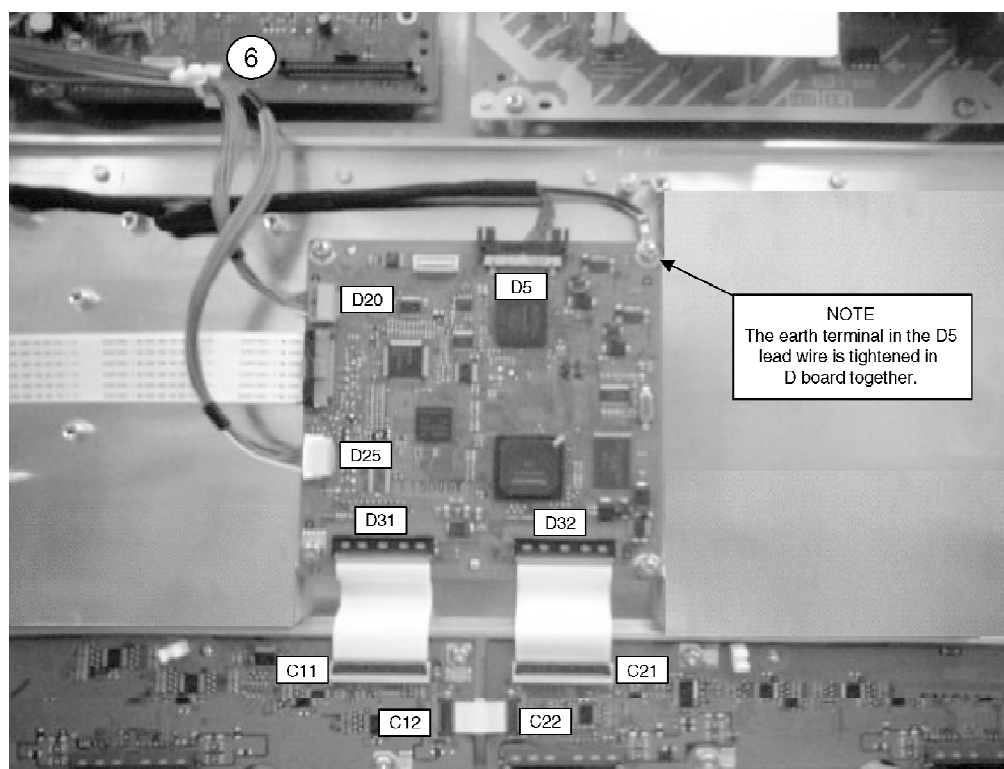

Connector No.	⑥					
D5 - DG5						
D20 - SC20	○					
D25 - P25	○					
D31 - C11						
D32 - C21						
C12 - C22						

7.2. Lead of Wiring (2)

The wire is dressed as shown in figure.


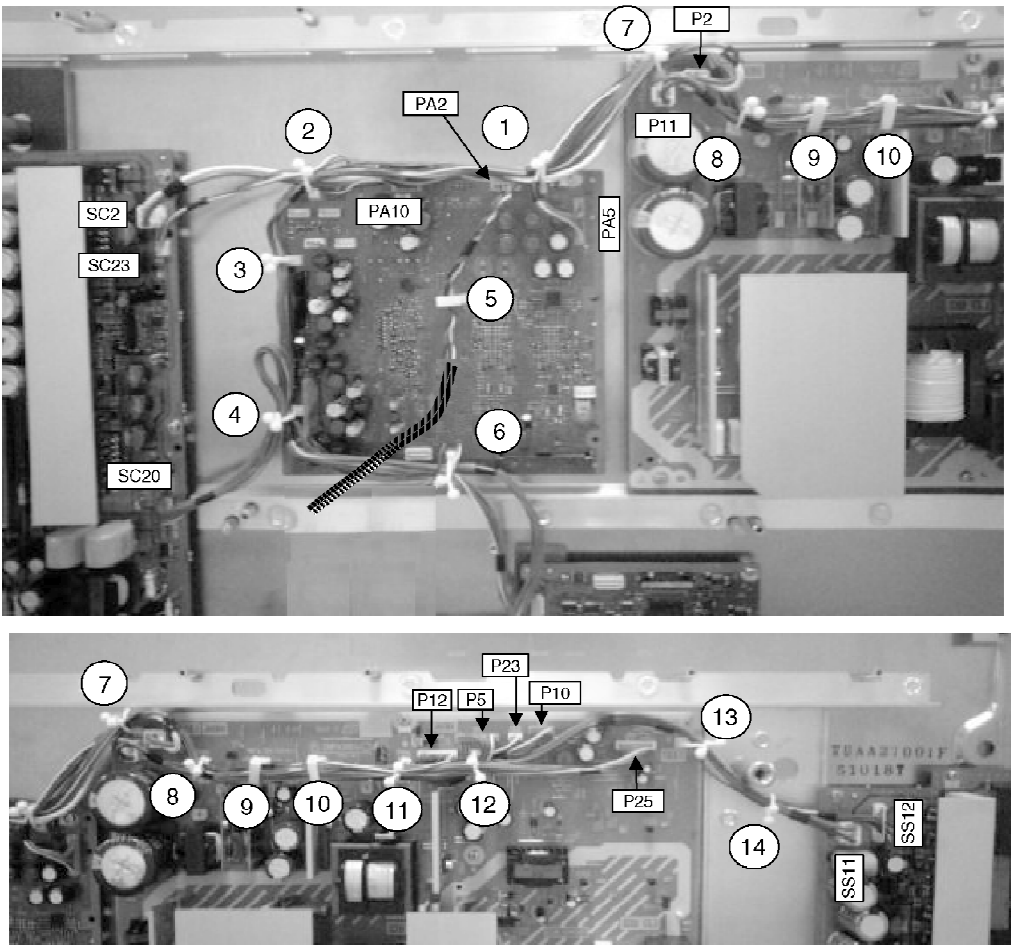


Connector No.	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
SC2 - P2	○	○					○							
SC23 - P23	○	○					○		○	○	○	○		
SC20 - D20				●		○								
PA2 - RELAY					○									
PA5 - P5	○						○	○	○	○	○	○		
PA10 - P10	○						○	○	○	○	○	○		
P11 - SS11								○	○	○	○	○	○	○
P12 - SS12												○	○	○
P25 - D25	○	○	○	○		○	○	○	○	○	○	○		

● : Windup twice

7.3. Lead of Wiring (3)

The wire is dressed as shown in figure.

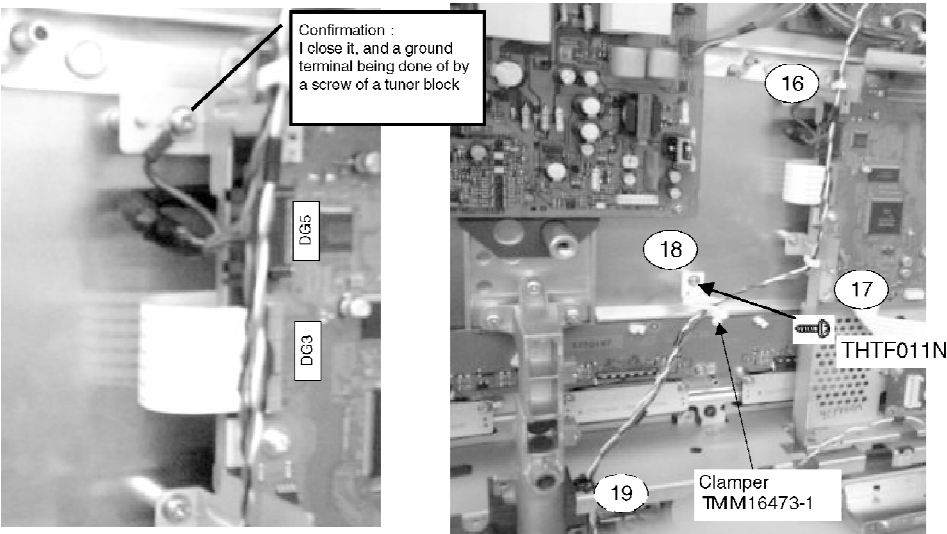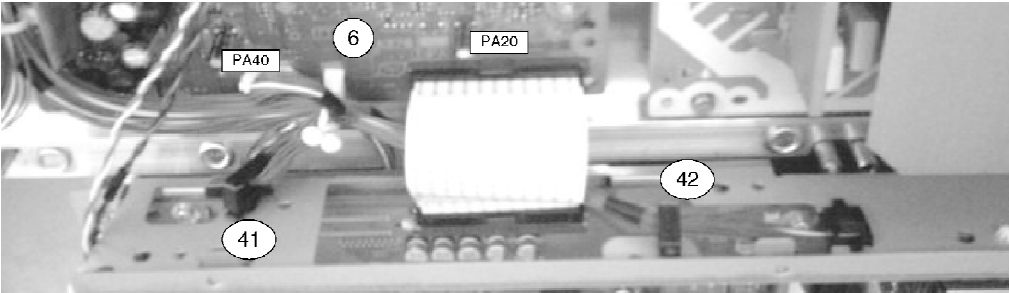


Connector No.	⑥	④①	④②	①⑥	①⑦	①⑧	①⑨
PA40 - H40	②	○	○				
DG3 - D3							
DG5 - D5							
PA2 - RERAY				○	○	○	○

② : Windup twice

7.4. Lead of Wiring (4)


The wire is dressed as shown in figure.

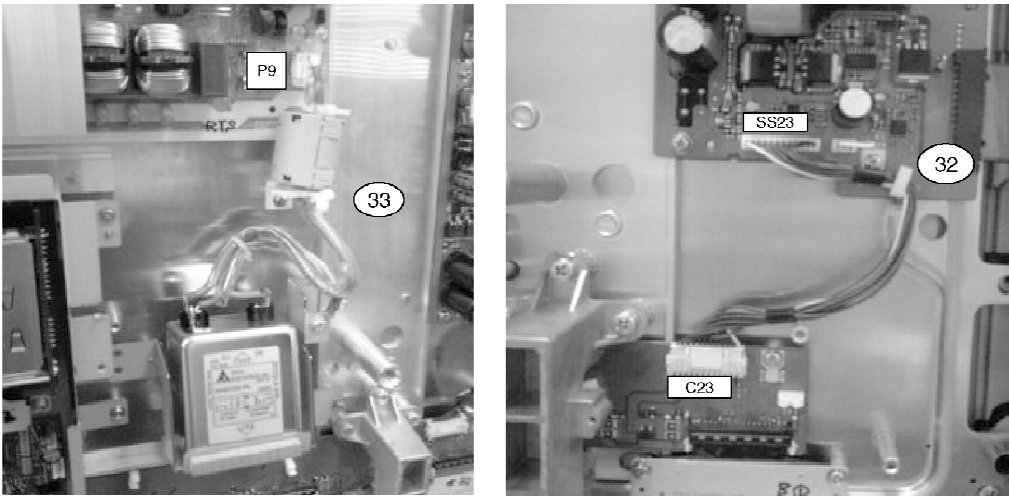


Connector No.	(32)	(33)																		
AC - P9		○																		
SS23 - C23	○																			

7.5. Lead of Wiring (5)

The wire is dressed as shown in figure.

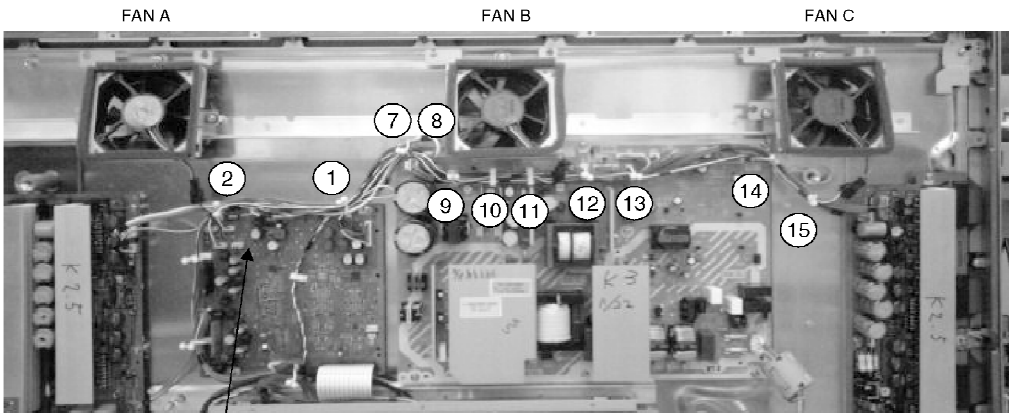


Dress the FAN A lead wire as shown in figure.

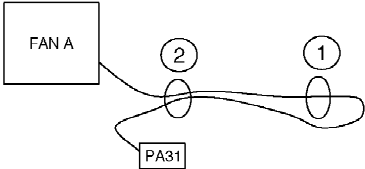

Connector No.	(2)	(1)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)
FAN A - PA31	●	○									
FAN B - PA32	○	○	○	○	○	○	○	○	○	○	○
FAN C - PA33	○	○	○	○	○	○	○	○	○	○	○

7.6. Lead of Wiring (6)

vire is dressed as shown in figure.

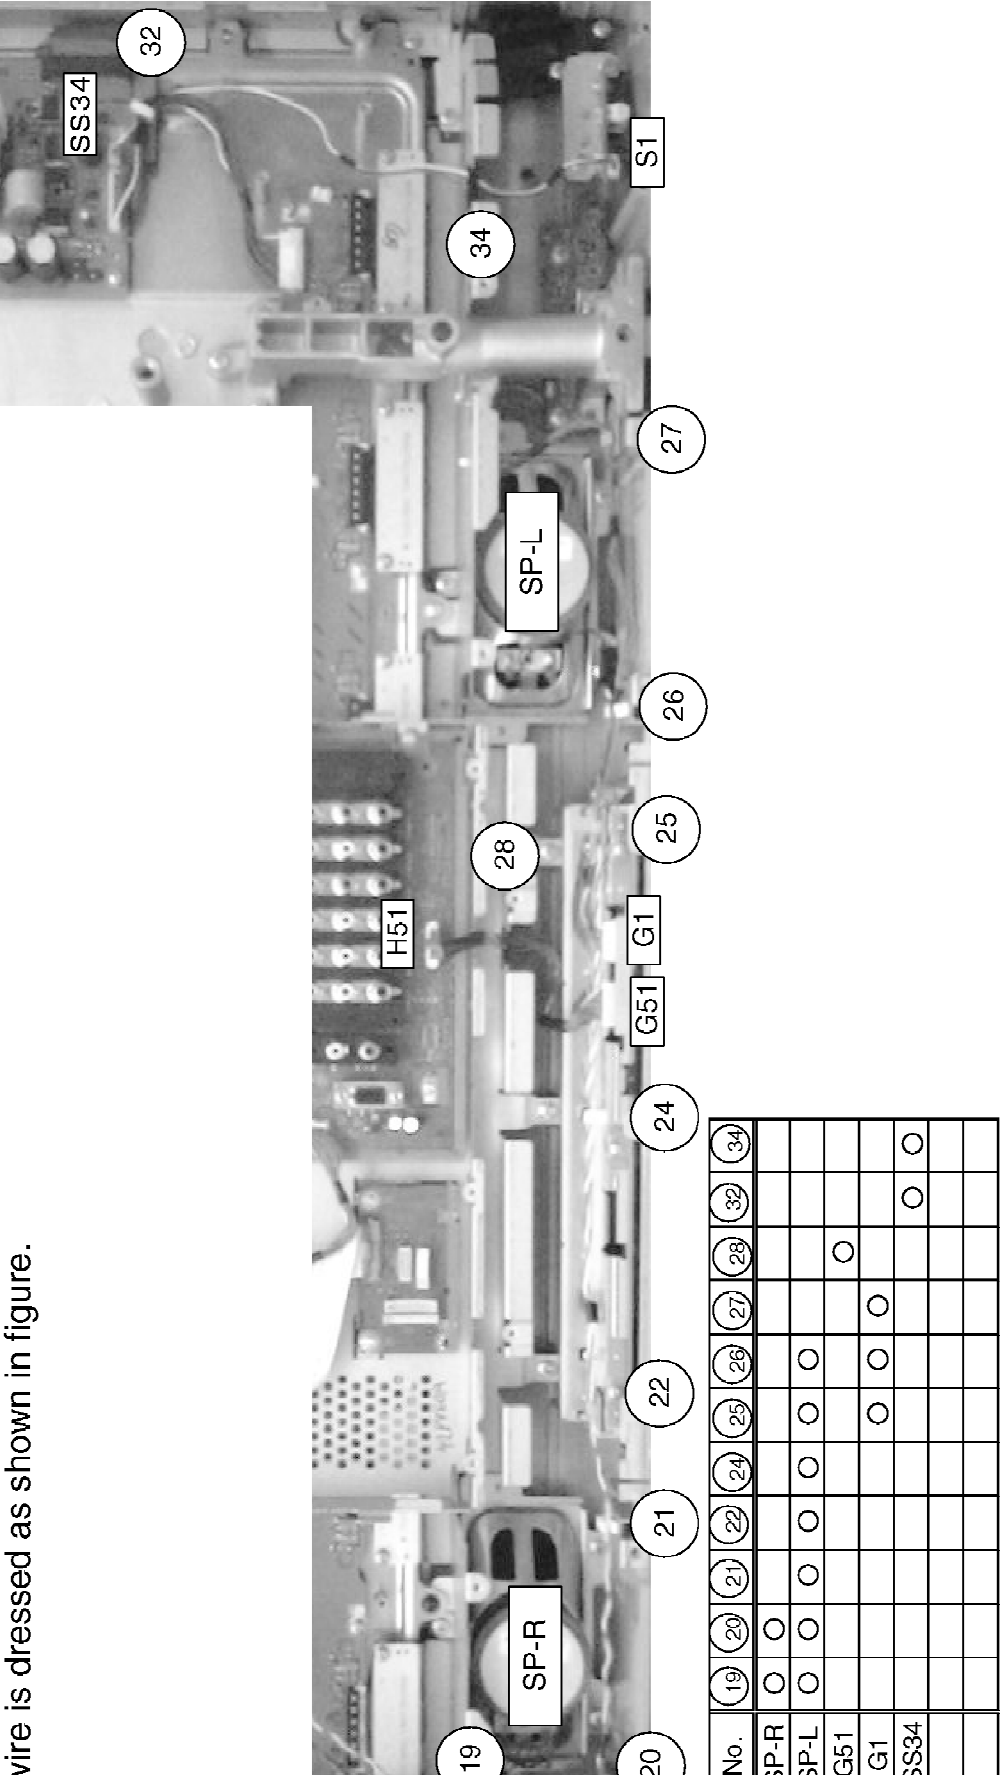

The w




Connector N	PA2 - SF	PA2 - SF	H51 - G	K1 - C	S1 - S		

8. Self Check

1. Self-Check is used to automatically check the bus lines and hexadecimal code of the TV set.

2. To get into the Self -Check mode press the Down () button on the customer controls at the front of the set, at the same time pressing the Recall button on the remote control, and the screen will show :

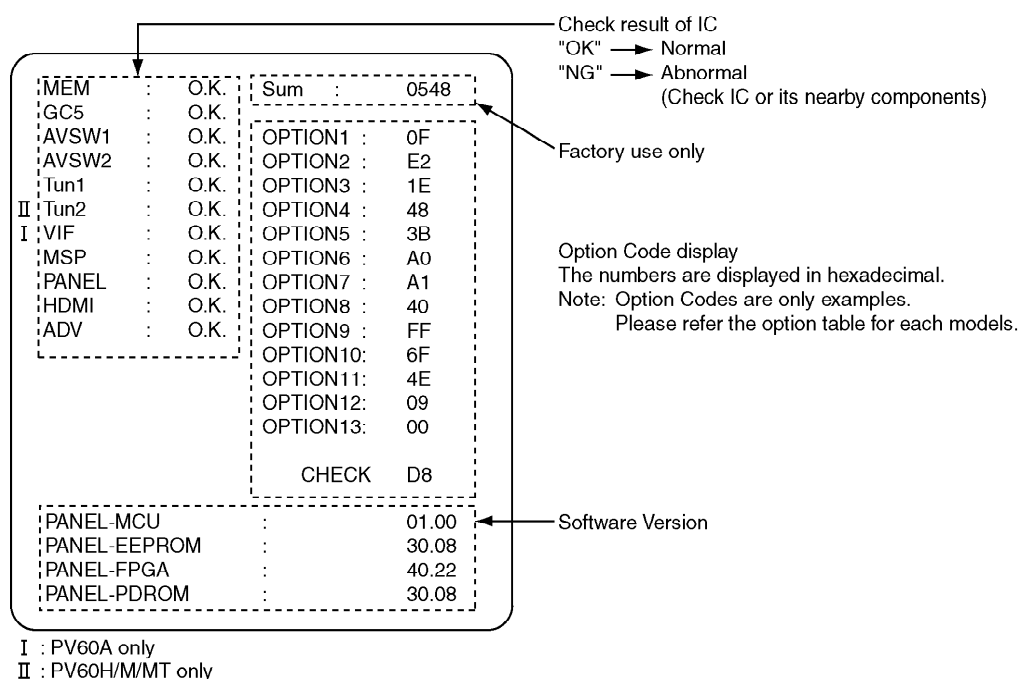

If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "O.K.".

Display	Ref.No.	Description	Board
MEM	IC1102	EEPROM	DG-Board
GC5	IC4037	GC5 Processor	DG-Board
AVSW1	IC3005	Video SW	H-Board
AVSW2	IC2105	Audio SW	H-Board
Tun1	TU001	Tuner (Main)	TA-Board
Tun2	TU002	Tuner (Sub)	TA-Board
VIF	-	-	-
MSP	IC2106	Multi Sound Processor	H-Board
PANEL	IC9003	Convert Micon	D-Board
HDMI	IC4026	HDMI I/F Receiver	DG-Board
ADV	IC4019	10bit A/D	DG-Board

8.1. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.

Blinking Times	Blinking timing	Contents	Check point
1		No particular check point	-
2		15V SOS	D-Board
3		3.3V SOS	D-Board
4		Power SOS	P-Board
5		5V SOS	D-Board
6		Driver SOS1 (SC Energy recovery circuit)	SU-Board SD-Board SC-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SS-Board
8		Driver SOS3 (SS Energy recovery circuit)	SS-Board
9		Panel Status	-
10		PA SOS Tuner SOS	PA-Board H-Board
11		Fan SOS	Fan
12		Sound SOS	PA-Board

8.2. No Power


[First check point]

There are following 3 states of No Power indication by power LED.


1. No lit

2. Green is lit then turns red blinking a few seconds later. (See 8.1)


3. Only red is lit.

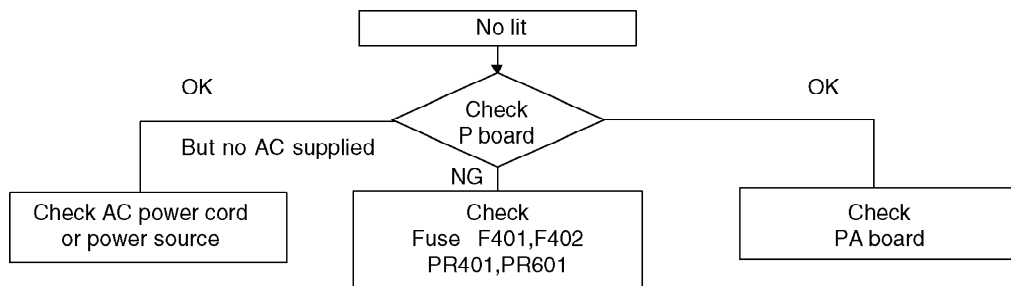

8.3. No Picture

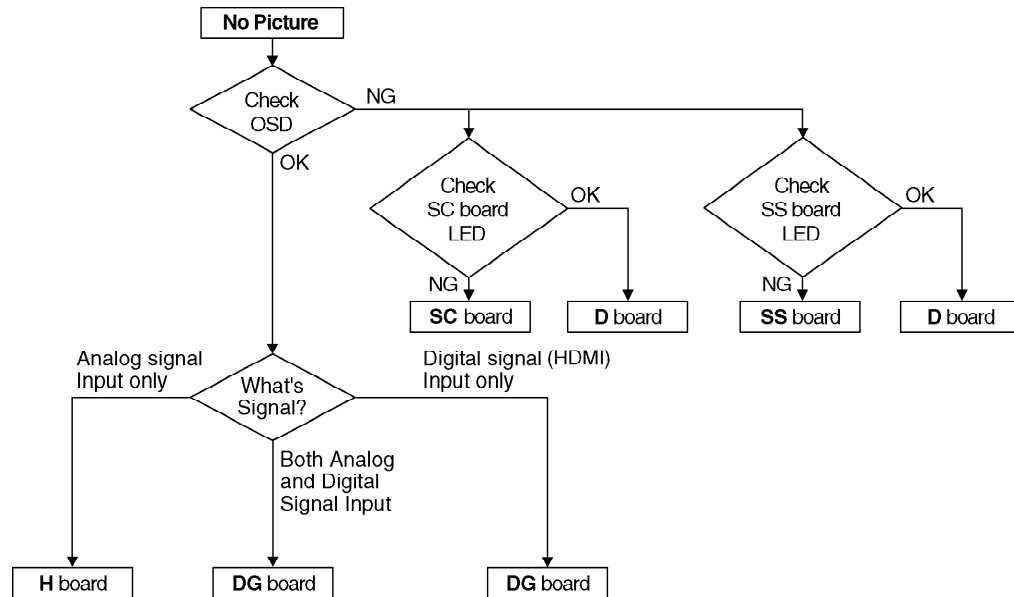


Drive circuits LED indicator

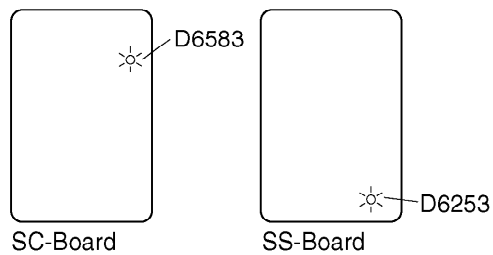

8.4. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

Fig-1

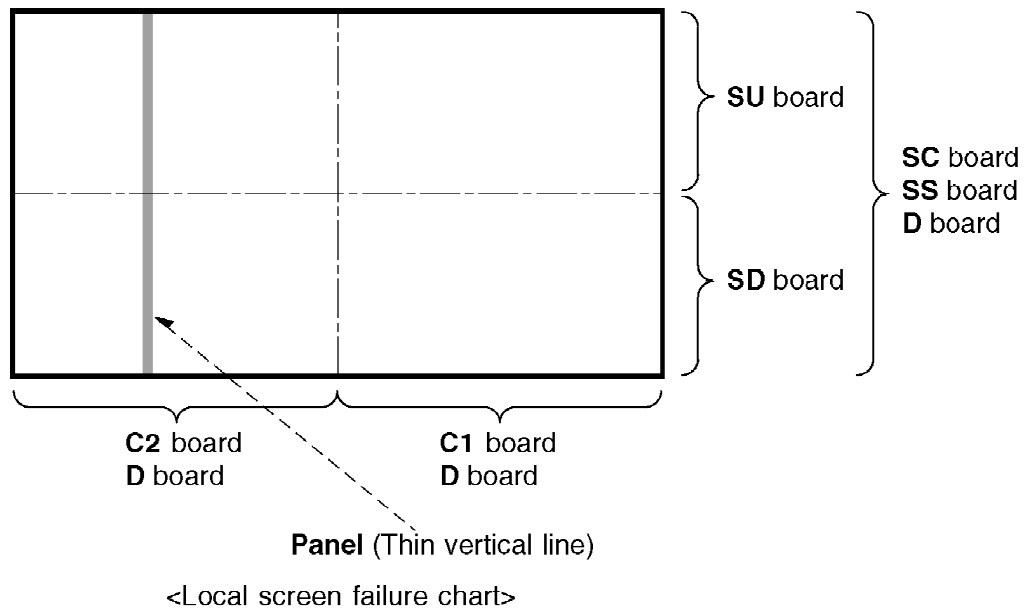

9. Service Mode Function

MPU controls the functions switching for each IICs through IIC bus in this chassis. The following setting and adjustment can be adjusted by remote control in Service Mode.

9.1. How to enter SERVICE 1


1. In sound menu, set BASS to MAXIMUM, and set TREBLE to MINIMUM.
2. Simultaneously press INDEX button on remote control and DOWN button [] on the TV set.

9.2. How to enter SERVICE 2

1. Set the channel to CH99.
2. Select the EQ 12kHz.
3. Press HOLD button on remote control.

Note:

To exit to Service mode, press EXIT or Power button on remote control.

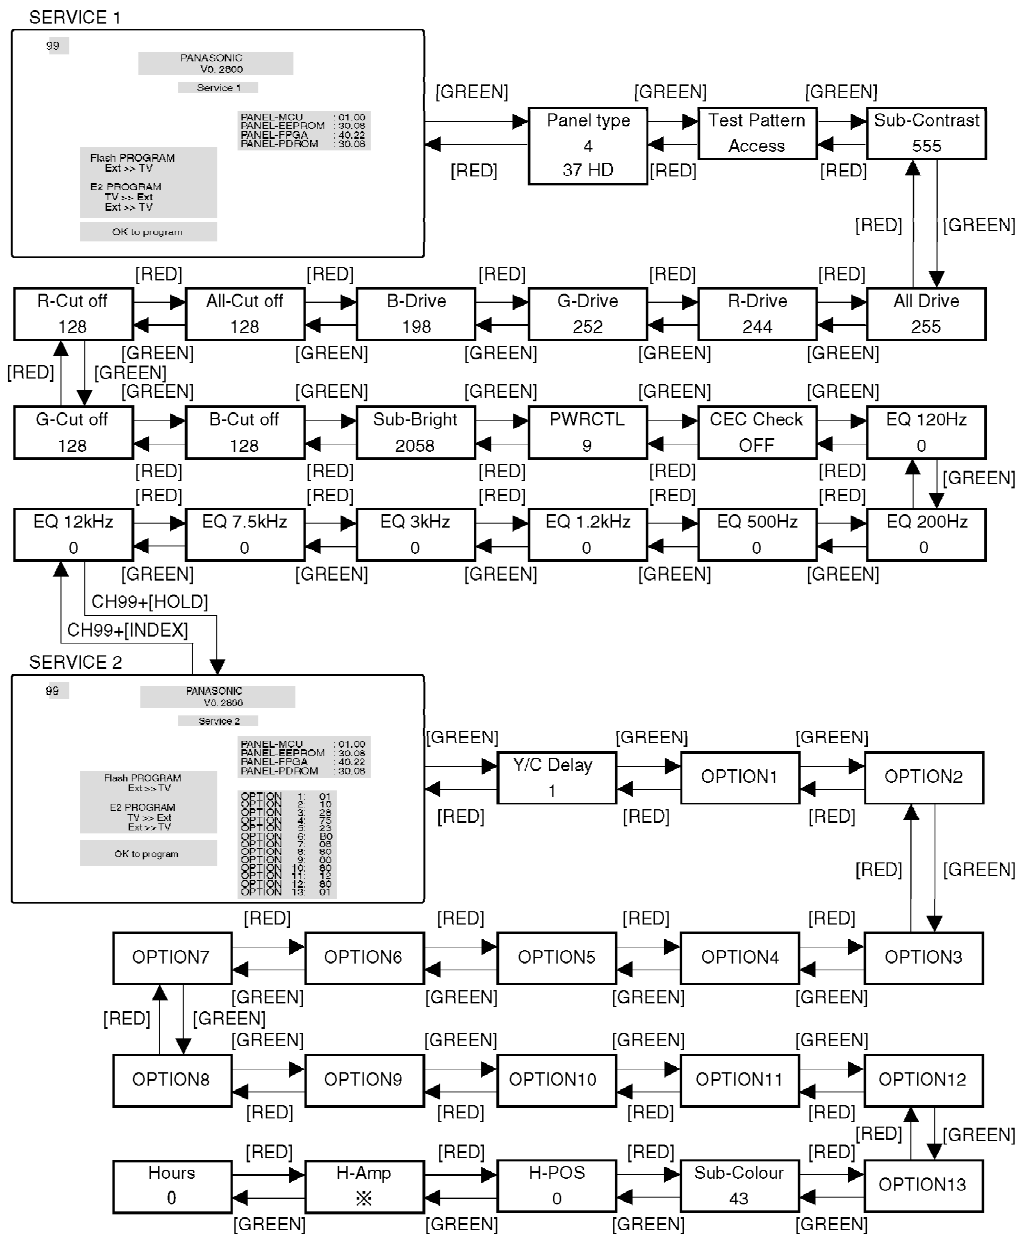

※ : This item appears when "component" selecting

Key Command

- Press the **RED/GREEN** button to step up/down through the functions.
- Press the **YELLOW/BLUE** button to change the function values.
- Press the **OK** button after each adjustment has been made to store the required values.

9.3. Option Description

	PV60H	PV60A	PV60MMT		
option1	0F	4D	0F		
b0	1	1	1	Colour system	Auto(1)
b1	1	0	1		SECAM(1)
b2	1	1	1		NTSC(1)
b3	1	1	1		M. NTSC(1)
b4	0	0	0	A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
b5	0	0	0	SIF	4.5/5.5/6.0/6.5(0), 5.5/6.0/6.5(1)
b6	0	1	0		5.5/6.5(2), 6.0/6.5(3)
b7	0	0	0	free	
option2	E2	22	E2		
b0	0	0	0	A2 enable	4.5(1)
b1	1	1	1		5.5(1)
b2	0	0	0		6.0(1)
b3	0	0	0		6.5(1)
b4	0	1	0	NICAM enable	4.5(1)
b5	1	1	1		5.5(1)
b6	1	0	1		6.0(1)
b7	1	0	1		6.5(1)
option3	1E	3A	1B		
b0	0	0	1	SASO enable	SASO enable(1)
b1	1	1	1	Fine tuning	Enable(1)
b2	1	0	0	Search speed	Slow(1) Fast(0)
b3	1	1	1	Tuner	MACO tuner (1), Others (0)
b4	1	1	1	HYPER	UHF only (0), UHF/VHF (1)
b5	0	1	0	IF I2C	I2C controlled Tuner IF module (1)
b6	0	0	0	NICAM C4 bit	enable(1)
b7	0	0	0	Blue Back	BLUE BACK on/off selection in menu(0)
option4	48	D8	48		
b0	0	0	0	Aspect AUTO	enable(1)
b1	0	0	0	S1/S2 enable	enable(1)
b2	0	0	0	ID-1	enable(1)
b3	1	1	1	User aspect Just	enable(1)
b4	0	1	0	User aspect 14:9	enable(1)
b5	0	0	0	ALBD 14:9	14:9 enable, Zoom3 disable at self wide(1)/ Zoom1, Zoom3 enable at self wide (0)
b6	1	1	1	TEXT	enable(1)
b7	0	1	0	TEXT TOP	TOP enable (1)
option5	3B	23	3B		
b0	1	1	1	CH Blanking	Blanking enable (1)
b1	1	1	1	AV Blanking	Blanking enable (1)
b2	0	0	0	Noise mute	Noise mute enable(0)
b3	1	0	1	sub picture	without sub-picture(0), with sub-picture(1)
b4	1	0	1	2tuner	2tuner(1), 1tuner(0)
b5	1	1	1	AV Input	3rotation(1) / 2rotation without front RCA (0)
b6	0	0	0	Panel (LCD)	Samsung Panel(1)/SHARP Panel(0)
b7	0	0	0	Large size (LCD)	32(1)/26(0) for LCD
option6	A0	A0	A0		
b0	0	0	0	SD module	with SD module (1)
b1	0	0	0	SD module Ext.Rec(PAL)	enable(1)
b2	0	0	0	SD module Ext.Rec(NTSC)	enable(1)
b3	0	0	0	SD module Ext.Rec(SECAM)	enable(1)
b4	0	0	0	IDTV	enable(1)
b5	1	1	1	HDMI	enable(1)
b6	0	0	0	Ext. HV input	without HV input(0) / with HV input(1)
b7	1	1	1	PC	enable(1)
option7	A1	A1	B1		
b0	1	1	1	Asia	Asia(1), europe(0)
b1	0	0	0	Australia	Australia(1)
b2	0	0	0	Ireland/India	India(1)
b3	0	0	0	UK/Korea	Korea(1)
b4	0	0	1	Lang1	Large(0)/Small(1)
b5	1	1	1	Lang2	OSD language: With Arabic(1)
b6	0	0	0	Lower POS	Lower POS enable(1)
b7	1	1	1	Owner ID	Enable(1)

	PV60H	PV60A	PV60MMT		
option8	40	40	40	Euro option	
b0	0	0	0	ACI all country	ACI enable(1), only Netherlands(0)
b1	0	0	0	ACI auto MP	ACI auto multi package enable (1)
b2	0	0	0	ACI offset	ACI offset for VCR prog. enable(1)
b3	0	0	0	Power up EC-Mode	Power on EC enable (1)
b4	0	0	0	AVLink	Q-Link off selectable in menu (1)
b5	0	0	0	Volume correction	TV Volume correction enable (1)
b6	1	1	1	MPX/NICAM display	Display NICAM (0), Display MPX (1)
b7	0	0	0	Albd Reset Off	enable(1)
option9	FF	06	FF		
b0	1	0	1	CH Plan	ASIA / M.E. / HK/UK / CHINA(1)
b1	1	0	1		NZ/INDNES(1)
b2	1	0	1		AUSTRALIA(1)
b3	1	0	1		E. EUROPE(1)
b4	1	0	1		SPECIAL(1)
b5	1	1	1		AMERICA(1)
b6	1	1	1		CATV(1)
b7	1	0	1		JAPAN(1)
option10	0F	08	0F		
b0	1	0	1	NICAM priority	ASIA/M.F. (1)
b1	1	0	1		HK/UK(1)
b2	1	0	1		CHINA(1)
b3	1	0	1		NZ/INDN(1)
b4	0	0	0		AUSTRAL(1)
b5	1	0	1		E. EURO(1)
b6	1	0	1		SPECIAL(1)
b7	0	1	0	HDMI AVI Aspect	enable(1)
option11	4E	4E	4E	Additional	
b0	0	0	0	Pcmocon Type	Dclux(1) / Lcador(0)
b1	1	1	1	Environment AI (PDP)	enable, with viewing mode auto (1) / disable, without viewing mode auto(0)
b2	1	1	1	WSS14:9 off	WSS 14:9 off (1)
b3	1	1	1	Child lock	Child Lock on:Tuning Menu skip(1)
b4	0	0	0		
b5	0	0	0	Contrast AI	enable(1)
b6	1	1	1	Service H-POS	enable(1)
b7	0	0	0	Service V-VOS	enable(1)
option12	09	09	09	Additional	
b0	1	1	1	last memory of aspect	each source(1) / ALL source(0)
b1	0	0	0	Reserved	
b2	0	0	0	TEXT Ch Refresh	refresh enable(1) / disable(0)
b3	1	1	1	STILL	1:Disable / 0:Enable
b4	0	0	0	LATIN	Latin:SAP/Fixed SIF4.5MHz/PAL-M,N/CC/Black level/Language
b5	0	0	0	SRS	enable(1)
b6	0	0	0	HDMI Quali TV	enable(0)
b7	0	0	0	HDMI EC function	enable(1)
option13	00	00	00	Additional	
b0	0	0	0	DVB ALBD	enable(1)
b1	0	0	0	HDMI port	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting)
b2	0	0	0	HDMI format error OSD	display(0)/not display(1)
b3	0	0	0	CEC control	enable(0)
b4	0	0	0	Aspect 4:3 FULL	enable(0)
b5	0	0	0	FTZ	enable(1)
b6	0	0	6		
b7	0	0	0		

10. Adjustment Procedure

10.1. Driver Set-up

10.1.1. Item / Preparation

1. Input a white signal to plasma video input.

2. Set the picture controls as follows.

Picture menu: Vivid

Picture: +30

Aspect: Full

Caution

1. First perform Vsus adjustment.

2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.

When Vad=-105V, Voltage of Vscn is 35V ±4V.

10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus $\pm$ 2V	R628 (P)	*
Ve	TPVE (SS)	Ve $\pm$ 2V	VR6000 (SS)	*
Vset	TPVSET (SC)	260V $\pm$ 7V	Fixed	
Vad	TPVAD (SC)	-105V $\pm$ 1V	VR6600 (SC)	
Vscn	TPVSCN (SC)	Vad+140V $\pm$ 4V	Fixed	
Vda	TPVDA (SS)	75V $\pm$ 1V	Fixed	
Vdat	P12-1, 5 (P)	75.5V $\pm$ 0.1V	R665 (P)	
PFC	C446 (+) (-)	396V $\pm$ 0.5V	R443 (P)	
Vlow	C555 (+) (-)	78.5V $\pm$ 0.1V	R661 (P)	Vda load current : 0.4A
Csus	TPVSUS / (SS)	180V $\pm$ 0.5V	R671 (P)	Vsus load current : 1.4A

***See the Panel label.**

Panel Label information



The diagram shows the front of the IC card with the following labels and fields:

- Serial No.:** A field with a dashed line indicating a serial number.
- Ve:** A field with a dashed line indicating the adjustment voltage.
- Vsus:** A field with a dashed line indicating the adjustment voltage.
- MADE IN JAPAN** and **TQF** are printed at the bottom.

An arrow points from the text "Adjustment voltage" to the **Ve** and **Vsus** fields.

10.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.

2. Set the picture controls as follows.


Picture menu : Vivid

Picture : +25

Aspect : Full

3. Connect Oscilloscope to TPSC1 (T2) and adjust VR6602 for $195 \pm 10 \mu \text{ Sec}$.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR6602 (SC)	$195 \pm 10 \mu \text{ Sec}$

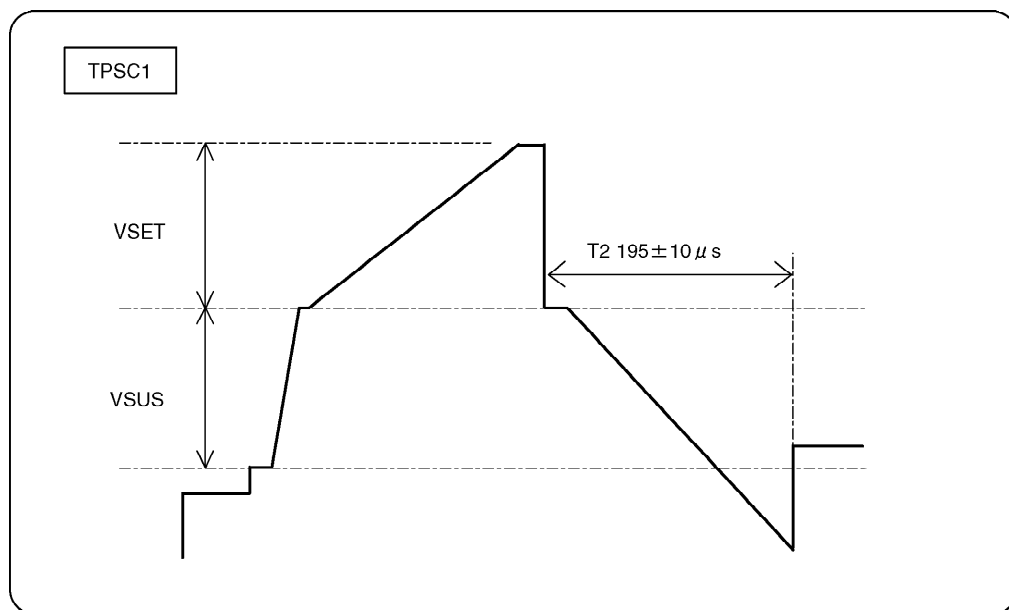

10.3. P.C.B. (Printed Circuit Board) exchange

10.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

10.3.2. Quick adjustment after P.C.B. exchange


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	$V_{sus} \pm 2V$	R628 (P)	*
	Vdat	P12-1, 5 (P)	$75.5V \pm 0.1V$	R665 (P)	
	PFC	C446 (+) (-) (P)	$396V \pm 0.5V$	R443 (P)	
	Vlow	C555 (+) (-) (P)	$78.5V \pm 0.1V$	R661 (P)	Vda load curr 0.4A
	Csus	TPVSUS (SS)	$180V \pm 0.5V$	R671 (P)	Vsus load cu : 1.4A
SC Board	Vad	TPVAD (SC)	$-105V \pm 1V$	VR6600 (SC)	
SS Board	Ve	TPVE (SS)	$V_e \pm 2V$	VR6000 (SS)	*
D, DG Board	White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signa				

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

10.4. Adjustment Volume Location

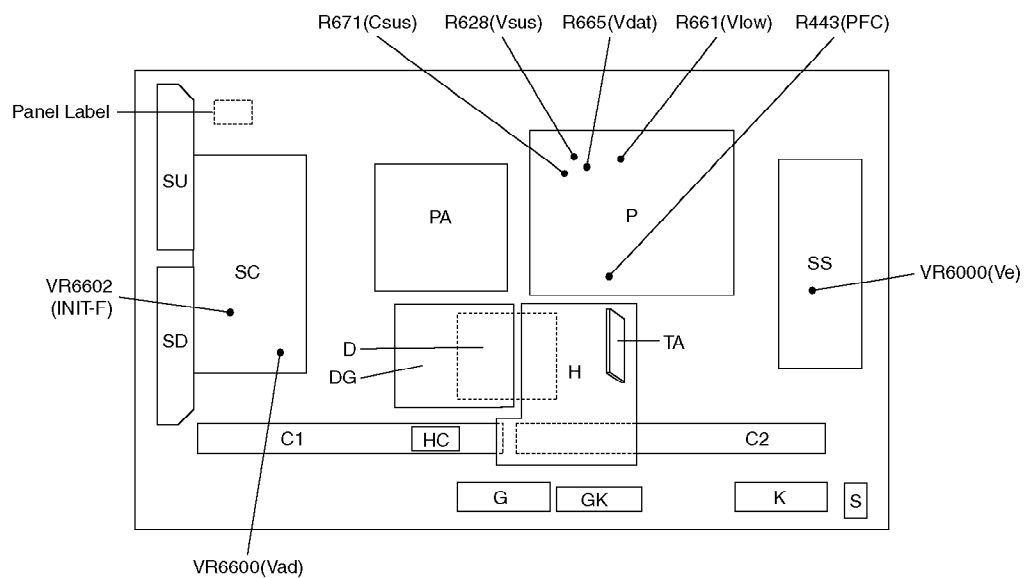


10.5. Test Point Location

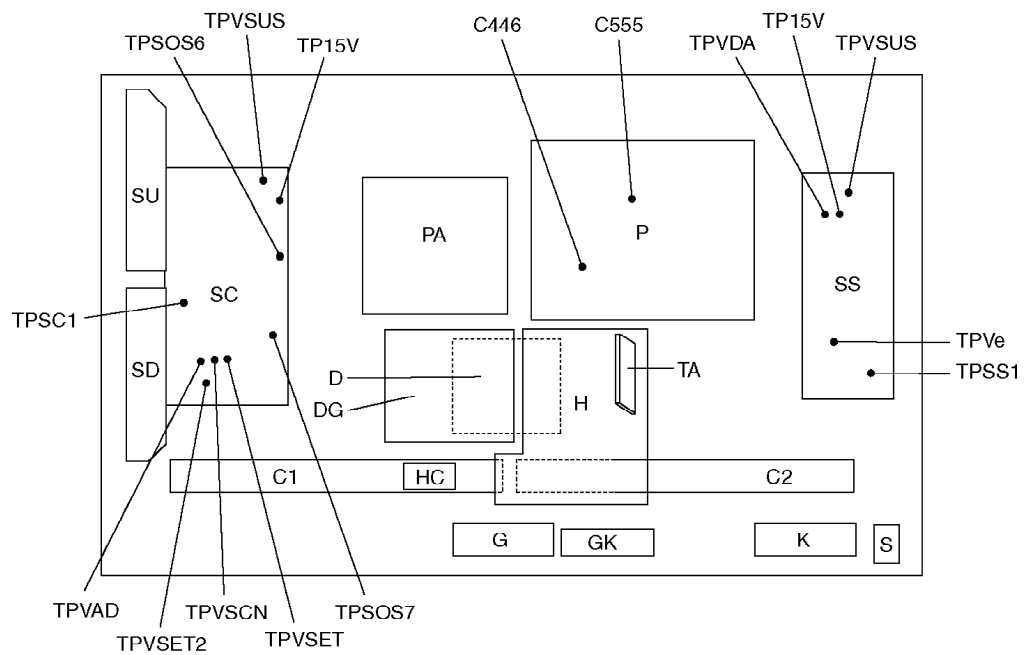


11. Adjustment

11.1. PAL panel white balance adjustment

Instrument Name	Connection	Remarks
-W/B pattern -Color analyzer (Minolta CA-100 or equivalent)	RF input Panel surface	User setting: Normal
Procedure		Remarks

Instrument Name	Connection	Remarks												
-Asing time is longer than 15min. -Make sure the front panel to be used on the final set is fitted. -Make sure a color signal is not being shown before adjustment. -Put the color analyzer where there is little colour variation. Complete the adjustment within 10 minutes after the turn on electricity. Turn on the power supply again when it is not possible to complete it by aging etc. 1. Display the white balance pattern. 2. Check that the color balance is "cool". 3. Enter the <Service1> mode. 4. Select "G-CUTOFF" item, using the color-key "Red" or "Green", and set to "128", using the color-key "Yellow" or "Blue". Also, "B-CUTOFF" and "R-CUTOFF" set to "128". 5. Set "G-DRIVE" at "224". 6. Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "Color balance Cool" in the below table. 7. Set "ALL-DRIVE" to "252". 8. Set colorbalance to "Normal". 9. Fix G cutoff , B cutoff and R cutoff at "128". 10. Fix G drive at "224". 11. Adjust B drive and R drive so the highlight window's x, y become the "Color balance "Normal" in the below table. 12. Set "ALL-DRIVE" to "252". 13. Set color balance to "Warm". 14. Set G cutoff, B cutoff and R cutoff to "128". 15. Set G drive to "224". 16. Adjust B drive and R drive so the highlight window's x, y become the "Color balance Warm" shown in the below table. 17. Set "ALL-DRIVE" to "252". Table 1. Color balance target value <table border="1"> <thead> <tr> <th>Color Temperature</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>Cool</td><td>0.276</td><td>0.276</td></tr> <tr> <td>Normal</td><td>0.288</td><td>0.296</td></tr> <tr> <td>Warm</td><td>0.313</td><td>0.329</td></tr> </tbody> </table>		Color Temperature	x	y	Cool	0.276	0.276	Normal	0.288	0.296	Warm	0.313	0.329	Picture menu : Dynamic ASPECT : 16:9 -Highlight section Signal amplitude 75% PAL White Balance Pattern  High light Low light 15
Color Temperature	x	y												
Cool	0.276	0.276												
Normal	0.288	0.296												
Warm	0.313	0.329												


11.2. HD white balance adjustment

Instrument Name	Connection	Remarks												
-1080i W/B Pattern -Color analyzer(Minolta CA-100 or equivalent)	-RF input -Panel surface	User setting: Normal												
Procedure		Remarks												
-Aging time is longer than 15min. -Make sure the front panel to be used on the final set is fitted. -Make sure a color signal is not being shown before adjustment. -Put the color analyzer where there is little colour variation. Complete the adjustment within 10 minutes after the turn on electricity. Turn on the power supply again when it is not possible to complete it by aging etc. 1. Display the white balance pattern. 2. Check that the color balance is "cool". 3. Enter the <Service1> mode. 4. Select "G-CUTOFF" item, using the color-key "Red" or "Green", and set to "128", using the color-key "Yellow" or "Blue". Also, "B-CUTOFF" and "R-CUTOFF" set to "128". 5. Set "G-DRIVE" at "224". 6. Touch the signal receiver of color analyzer to the highlight window's center, and adjust B drive and R drive so x, y become the "Color balance Cool" in the below table. 7. Set "ALL-DRIVE" to "252". 8. Set colorbalance to "Normal". 9. Fix G cutoff , B cutoff and R cutoff at "128". 10. Fix G drive at "224". 11. Adjust B drive and R drive so the highlight window's x, y become the "Color balance "Normal" in the below table. 12. Set "ALL-DRIVE" to "252". 13. Set color balance to "Warm". 14. Set G cutoff, B cutoff and R cutoff to "128". 15. Set G drive to "224". 16. Adjust B drive and R drive so the highlight window's x, y become the "Color balance Warm" shown in the below table. 17. Set "ALL-DRIVE" to "252". Table 1. Color balance target value <table border="1"> <thead> <tr> <th>Color Temperature</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>Cool</td><td>0.276</td><td>0.276</td></tr> <tr> <td>Normal</td><td>0.288</td><td>0.296</td></tr> <tr> <td>Warm</td><td>0.313</td><td>0.329</td></tr> </tbody> </table>		Color Temperature	x	y	Cool	0.276	0.276	Normal	0.288	0.296	Warm	0.313	0.329	Picture menu: Dynamic ASPECT:16:9 -Highlight section Signal amplitude 75% 1080i White Balance Pattern  High light Low light 15 * The Color balance COOL from Japanese model val
Color Temperature	x	y												
Cool	0.276	0.276												
Normal	0.288	0.296												
Warm	0.313	0.329												



11.3. Sub bright adjustment

Instrument Name	Connection	Remarks
1. PAL signal generator (or RF)	Connect to the input terminal	User setting: Normal
Procedure		Remarks
-Color balance adjustment is finished for each signal. -Do adjustments in a dark room. -Complete the adjustment within 10 minutes after the turn on electricity. Turn on the power supply again when it is not possible to complete it by aging etc. 1. Display the 10 steps gray-scale pattern for adjusting sub-bright from video input. 2. Use "Sub-Bright" in the <Sevice1> mode to adjust so the 6th section shows up and the 7th fades away.		Picture menu: Dynamic Color balance: Normal ASPECT: 16:9
Data Sub-Bright data addresses Sub-Bright (upper) A0-0116 Sub-Bright (lower) A0-0117		
6th 7th 		

11.4. ABL adjustment

Instrument Name	Connection	Remarks
1. HD signal emitter (or Leader : 1080i/No.9 signal) 2. Wattmeter	COMPONENT input terminal Connect the AC power of the set to the wattmeter.	
Procedure		Remarks
-Make sure the set is aged for 30 minutes or more before adjustment. (Do not switch off during or after aging.) -Voltage 230V 50Hz (variation within 1%) -Volume at minimum and screen size at "16:9" Component input, dynamic, standard 1. Connect the set's AC power to the wattmeter. 2. Input the signal (top half: color bar, Bottom half :Horizontal 10steps bar). 3. Select the "PWRCTL" item in the <Service1> mode 4. Adjust PWRCTL so the set's power consumption is 331 ±10W Remarks 1. The initial data are Data address: A0-0102 Default data: 0×00 2. The power and data are in reverse relationship. (Lower the data to raise the power.) -Raising direction (↑): 0 → 255, 254, 253..... -Lowering direction (↓): 0 → 1, 2, 3..... 3. There is a possibility that the adjustment value can do two places, adjust it in that case, that the value of PWRCTL is large.  No.9 Signal Top half: Full color bar Bottom half: Horizontal 10 steps bar		

11.5. Sub-Contrast adjustment

Name of measuring instrument	Connection	Remarks
RF generator Base Band generator		
Preparation (AV)		Remarks
1. Receive AV1 (PAL 100% Full White or Split Colour bar shown as below) .  2. Goes into service mode, choose Sub-Contrast, and it checks that data value is 512. (It checks that an initial value is a default)		
Adjustment of AV system		Remarks
1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to white. 4. End.		
Preparation (RF)		Remarks
1. Receive RF (PAL 100% Full White or Split Colour bar shown as below.)  2. Goes into service mode, choose Sub-Contrast, and it checks that data value is 512. (It checks that an initial value is a default)		
Adjustment of RF system		Remarks
1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to white. 4. End.		
Preparation (HD)		Remarks
1. Receive Component (1080i/ 60Hz or 1080i/ 50Hz, 100% Full White or Split colour bar as shown below.)  2. Goes into service mode, choose Sub-Contrast, and it checks that data value is 384. (It checks that an initial value is a default)		
Adjustment of HD system		Remarks
1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to white. 4. End.		

11.6. Multi-window adjustment

Name of measuring instrument	Connection	Remarks
Base Band generator		
Condition		Remarks
Sub contrast adjustment is finished.		
Preparation		
1. Come out of market mode and input AV1 PAL 100% full white. 2. Go into service mode, choose VIDEO Gain2, and check that data is 255. (Check that initial value is the default)		
Adjustment		Remarks
1. Check the brightness of main screen and sub screen by watching. 2. Go to procedure 3 when the brightness of sub screen is higher than that of main screen. Oppositely, do not adjust and end when the brightness of sub screen is lower than that of main screen. 3. Adjust VIDEO Gain2 so that the borderline of main and sub screen may become unremarkable by watching.		Press OK button.


12. Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command

- Enter to the Service 2 Mode.
- Press Information button on remote control and entry to the EAROM EDITOR Mode.
- Press the RED/GREEN button to step up/down through the address.
- Press the YELLOW/BLUE button to step left/right through the address.
- Press the PROGRAMME UP/DOWN button to step up/down through the page.
- Press the VOLUME UP/DOWN button to change the function values.
- Set the data of EEPROM(ADDRESS 0BAF) to 01.
- Press the OK button to memorize the data.

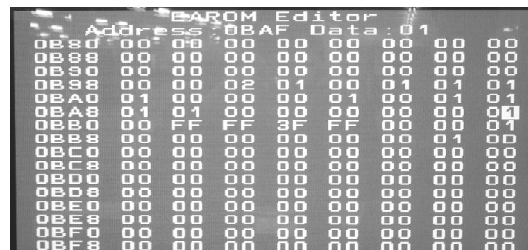

Push the Power switch(button) off/on the set(the remote control)

to turn the set off/on.
It can be made Hotel mode.

3. Exit command

- First, set the data of EEPROM(ADDRESS 0BAF) to 00.
Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.
Then, it is no longer hotel mode.

4. Access command to the Hotel mode setup menu

- Prerequisite : It is conditions that the data of EEPROM(ADDRESS 0BAF) is 01.
In order to display the Hotel mode setup menu, please enter the following command (within 2 second).
[[TV]:down + [REMOTE]:TV/AV(3 times)]
Then, the Hotel mode setup menu is displayed.



5. Explain the Hotel mode setup menu

item	Function
Initial INPUT	Select input signal modes. Set the input, when each time power is switched on. Selection : Off/TV/AV1/AV2/AV2S/AV3/Av3S/AV4/Av4S/Component/PC/HDMI1/HDMI2 -Off: give priority to a last memory. However, Euro model is compulsorily set to TV. -AVnS/AVnC: only Euro model selectable -PC: selectable with VGA option
Initial VOL level	Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 -Off: give priority to a last memory
Maximum VOL level	Adjust maximum volume. Range : 0 to 63

item	Function
Initial POS	Select programme number. Selection : Off/0 to 99 -Off: give priority to a last memory
Button lock	Select local key conditions. Selection : Off/SETUP/MENU/All -Off: altogether valid -SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) -MENU: only F-key is invalid (only Volume/Mute can be selected.) -All: altogether invalid.
Remote lock	Select remote control key conditions. Selection : Off/SETUP/MENU -Off: altogether valid -SETUP: only Setup menu is invalid -MENU: Picture/Sound/Setup menu are invalid

6. To exit the Hotel mode

Disconnect AC power cord from wall outlet

13. Conductor Views

13.1. P-Board

13.2. PA-Board

13.3. H, HC and TA-Board

13.4. G-Board

13.5. GK, K and S-Board

13.6. DG-Board

13.7. D-Board

13.8. C1-Board

13.9. C2-Board

13.10. SC-Board

13.11. SU-Board

13.12. SD-Board

13.13. SS-Board

14. Schemaatic and Block Diagram

14.1. Schematic Diagram Notes

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.

- Notes:
- 1. **Resistor**
Unit of resistance is Ohm [Ω] (K=1,000, M=1,000,000).
 - 2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
 - 3. **Coil**
Unit of inductance is H, unless otherwise noted.
 - 4. **Test Point**
 ∇ : Test Point position
 - 5. **Earth Symbol**
 $\perp$: Chassis Earth (Cold) ∇ : Line Earth (Hot)
 - 6. **Voltage Measurement**
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
 - 7. When arrow mark ($\nearrow$) is found, connection is easily found from the direction of arrow.
 - 8. Indicates the major signal flow. Video $\Rightarrow$ Audio $\Leftarrow$
 - 9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.

All circuits, except the Power Circuit, are cold.

Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

TH-42PV50AH/M/MT
Schematic Diagram Notes

14.2. Main Block Diagram

14.3. P-Board Block Diagram

14.4. P-Board (1 of 6) Schematic Diagram

14.5. P-Board (2 of 6) Schematic Diagram

14.6. P-Board (3 of 6) Schematic Diagram

14.7. P-Board (4 of 6) Schematic Diagram

14.8. P-Board (5 of 6) Schematic Diagram

14.9. P-Board (6 of 6) Schematic Diagram

14.10. PA-Board Block Diagram

14.11. PA-Board (1 of 3) Schematic Diagram

14.12. PA-Board (2 of 3) Schematic Diagram

14.13. PA-Board (3 of 3) Schematic Diagram

14.14. H and TA-Board Block Diagram

14.15. G, GK, HC and K-Board Block Diagram

14.16. H-Board (1 of 3) Schematic Diagram

- 14.17. H-Board (2 of 3)Schematic Diagram**
- 14.18. H-Board (3 of 3)Schematic Diagram**
- 14.19. G, GK and K-Board Schematic Diagram**
- 14.20. HC and TA-Board Schematic Diagram**
- 14.21. DG-Board (1 of 3) Block Diagram**
- 14.22. DG-Board (2 of 3) Block Diagram**
- 14.23. DG-Board (3 of 3) Block Diagram**
- 14.24. DG-Board (1 of 8) Schematic Diagram**
- 14.25. DG-Board (2 of 8) Schematic Diagram**
- 14.26. DG-Board (3 of 8) Schematic Diagram**
- 14.27. DG-Board (4 of 8) Schematic Diagram**
- 14.28. DG-Board (5 of 8) Schematic Diagram**
- 14.29. DG-Board (6 of 8) Schematic Diagram**
- 14.30. DG-Board (7 of 8) Schematic Diagram**
- 14.31. DG-Board (8 of 8) Schematic Diagram**
- 14.32. D-Board Block Diagram**
- 14.33. D-Board (1 of 6) Schematic Diagram**
- 14.34. D-Board (2 of 6) Schematic Diagram**
- 14.35. D-Board (3 of 6) Schematic Diagram**
- 14.36. D-Board (4 of 6) Schematic Diagram**
- 14.37. D-Board (5 of 6) Schematic Diagram**
- 14.38. D-Board (6 of 6) Schematic Diagram**
- 14.39. C1 and C2-Board Block Diagram**
- 14.40. C1-Board (1 of 2) Schematic Diagram**
- 14.41. C1-Board (2 of 2) Schematic Diagram**

14.42. C2-Board (1 of 2) Schematic Diagram

14.43. C2-Board (2 of 2) Schematic Diagram

14.44. SC, SU and SD-Board Block Diagram

14.45. SC-Board (1 of 2) Schematic Diagram

14.46. SC-Board (2 of 2) Schematic Diagram

14.47. SU-Board (1 of 2) Schematic Diagram

14.48. SU-Board (2 of 2) Schematic Diagram

14.49. SD-Board (1 of 2) Schematic Diagram


14.50. SD-Board (2 of 2) Schematic Diagram

14.51. SS and S-Board Block Diagram


14.52. SS and S-Board Schematic Diagram


15. Parts Location & Mechanical Replacement Parts List

15.1. Parts Location



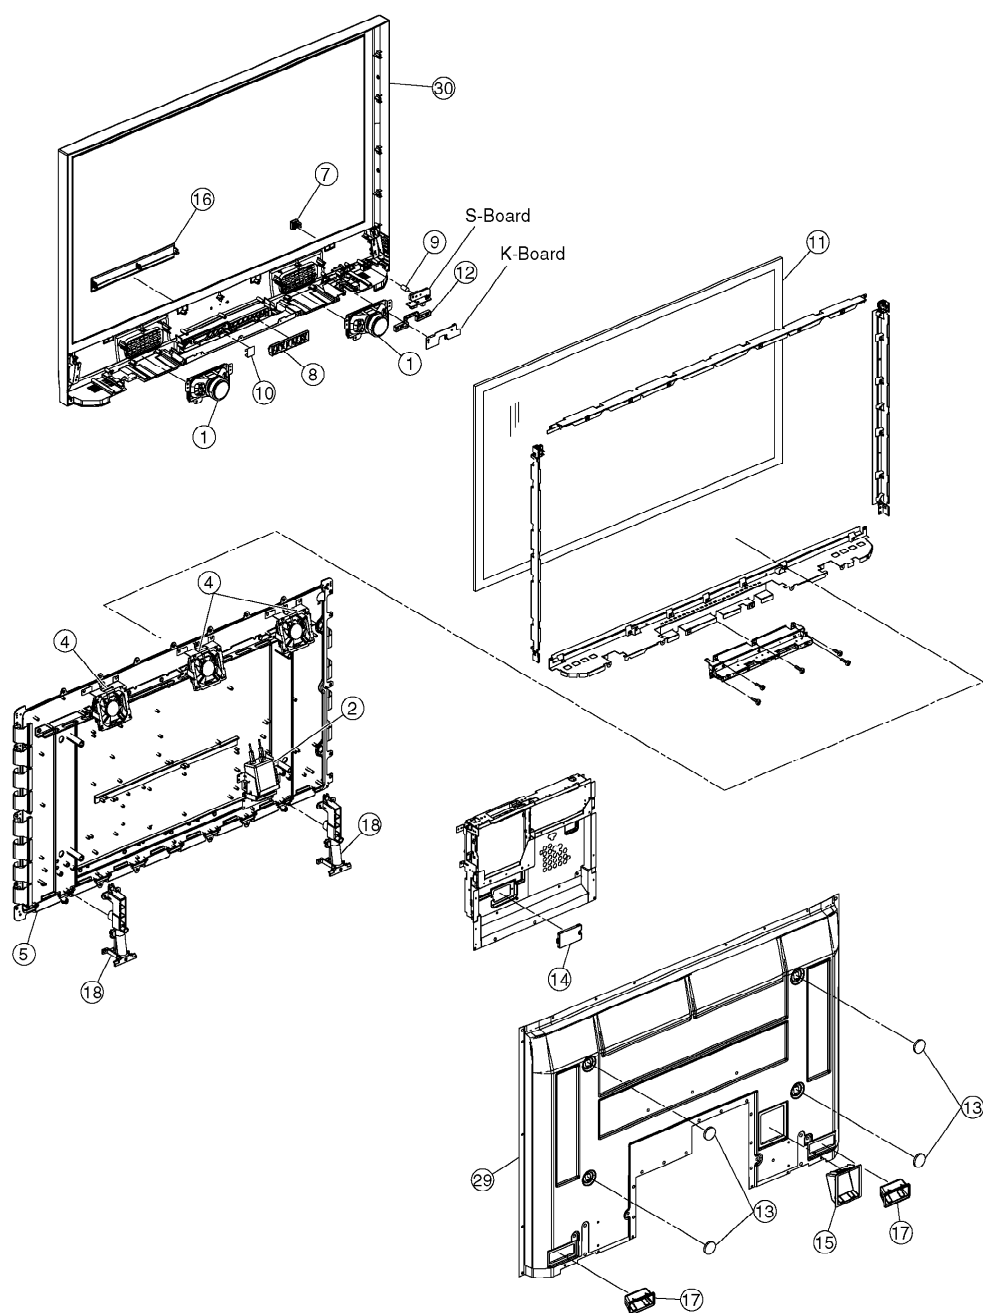



15.2. Packing Exploded Views (1)

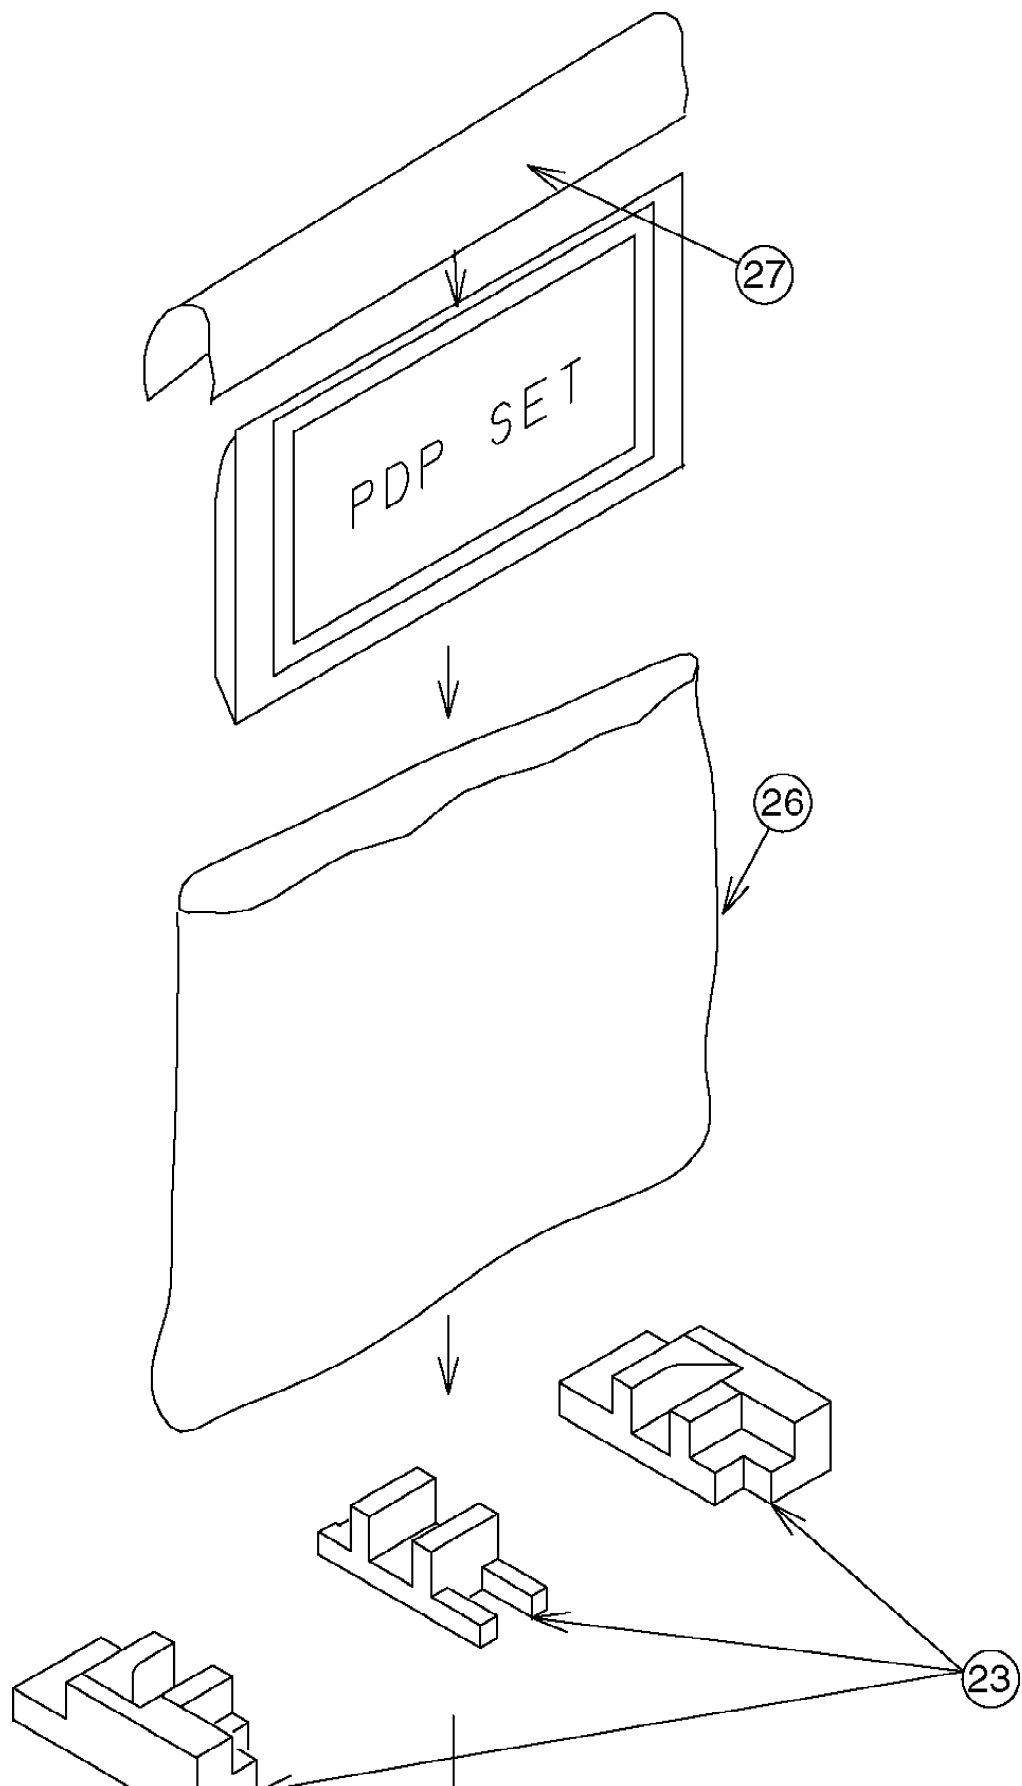

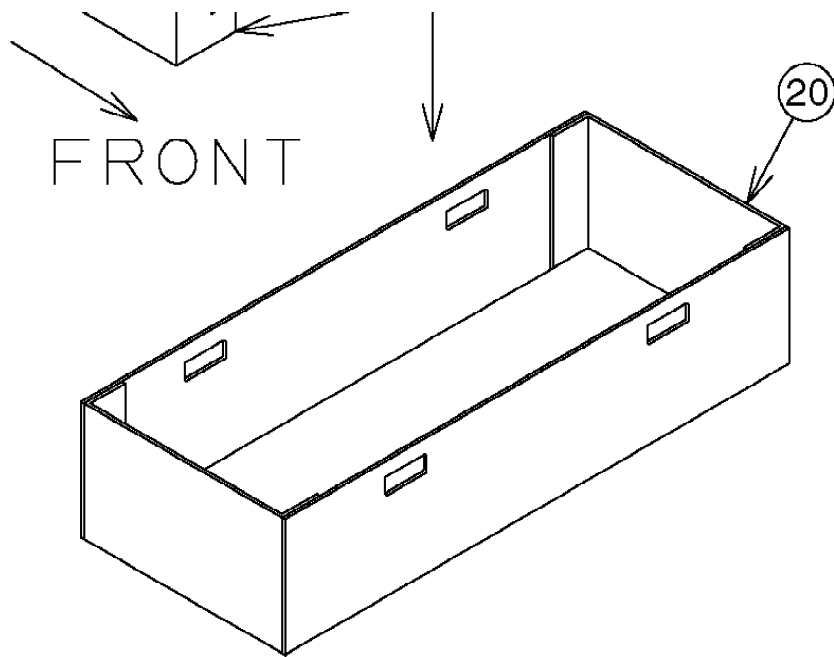


15.3. Packing Exploded Views (2)

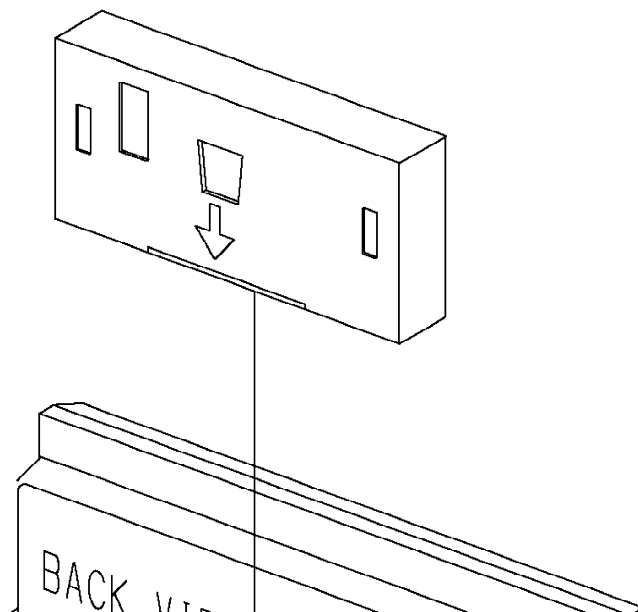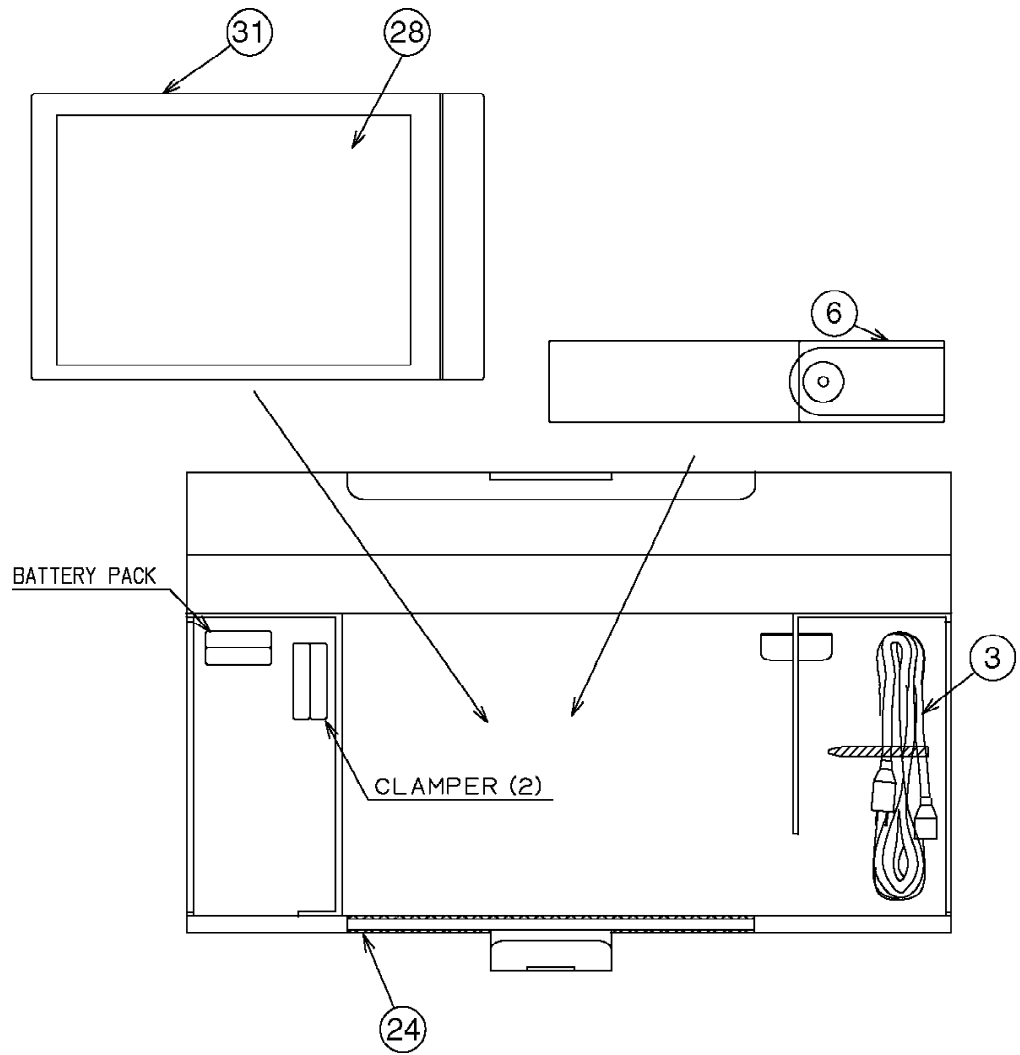

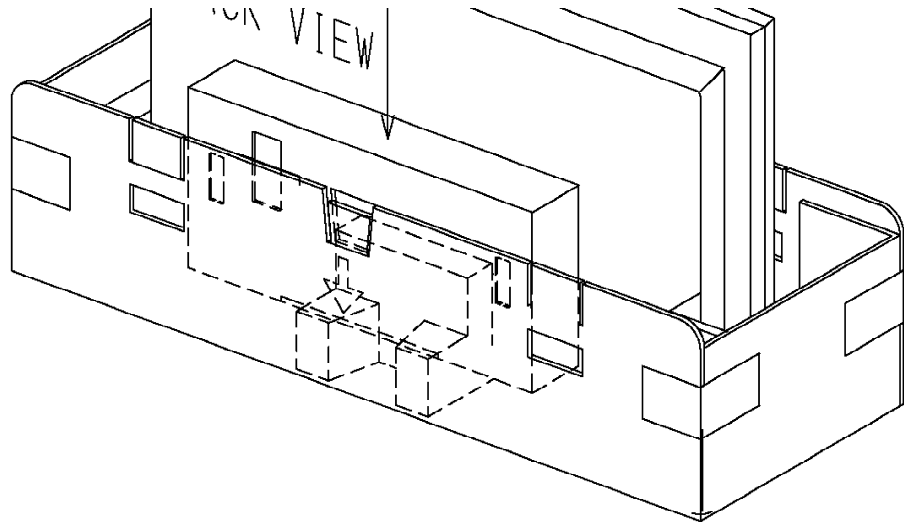

15.4. Packing Exploded Views (3)

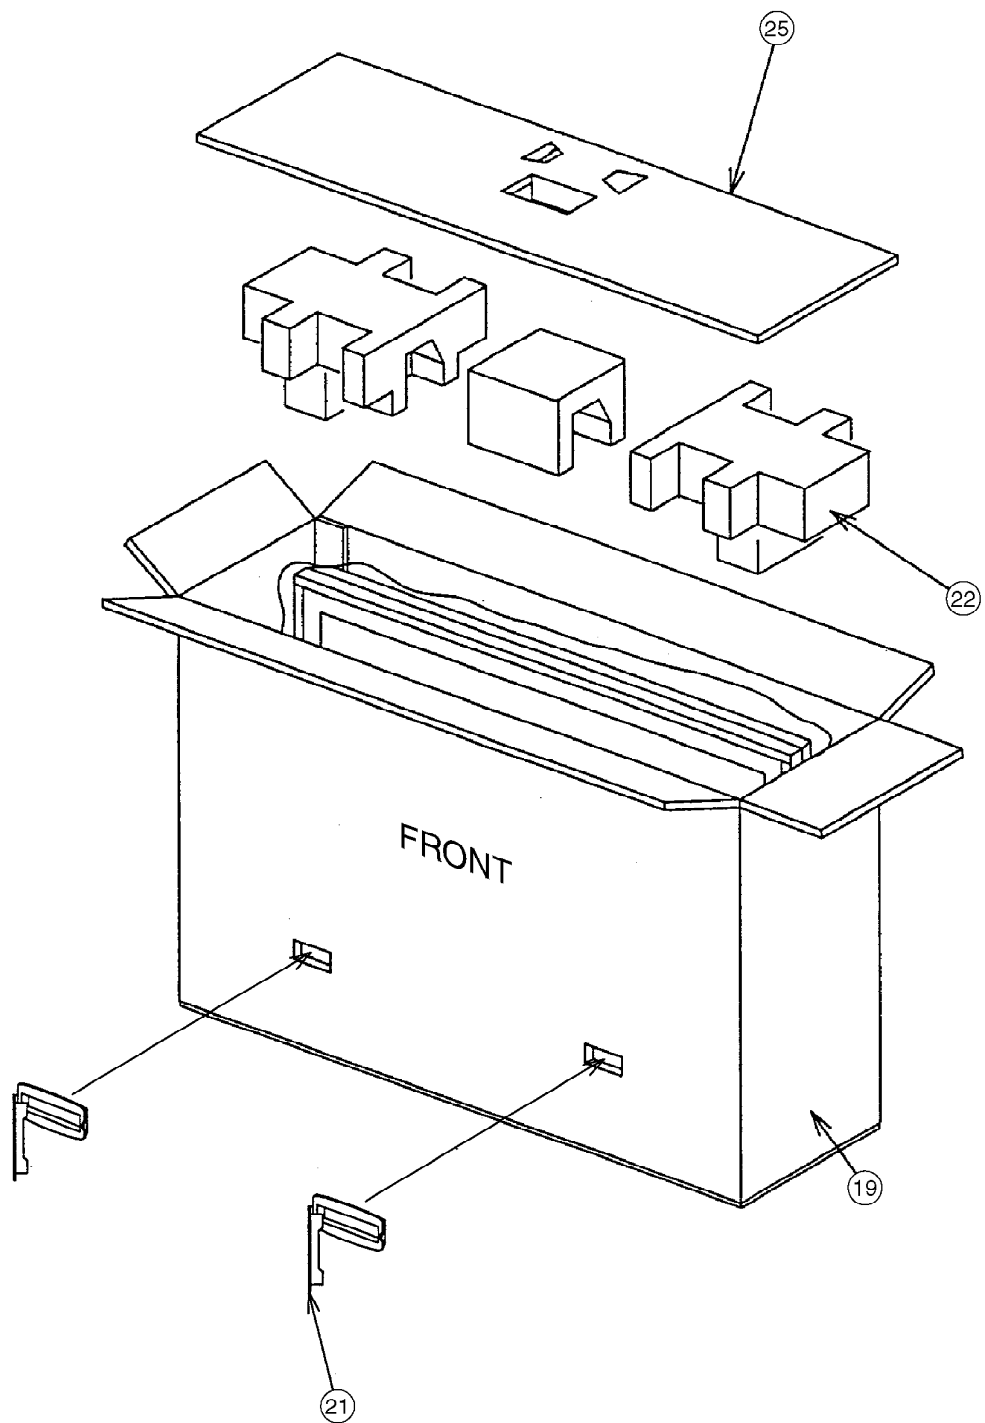

15.5. Mechanical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
<u>1</u>	EAS12S10A	SPEAKER	2	
	J2ZZ00000036	RF CABLE	1	TH-42PV60H/M/MT
<u>2</u>	K2AHYH000005	AC INLET	1	
<u>3</u>	K2CG3DH00051	AC CORD(Thai)	1	TH-42PV60MT 
3	K2CK3DH00029	AC CORD(AUSTRALIA)	1	TH-42PV60A 
3	K2CT3DH00006	AC CORD	1	TH-42PV60M 
3	K2CT3DH00018	AC CORD	1	TH-42PV60H/M 
<u>4</u>	L6FALEFH0028	FAN	3	
<u>5</u>	MD42H09A1J	PLASMA DISPLAY PANEL	1	
<u>6</u>	N2QAJB000121	REMOTE CONTROL	1	TH-42PV60A
6	N2QAJB000154	REMOTE CONTROL	1	TH-42PV60H/M/MT
	TBMA185	PANASONIC BADGE	1	
<u>7</u>	TBXA48701	POWER BUTTON	1	
<u>8</u>	TBXA48801	CONTROL BUTTON	1	
<u>9</u>	TES4G204	SPRING	1	
<u>10</u>	TESA274	LEAF SPRING	1	
	THEL035N	SCREW	73	
	THEL0429	SCREW	28	
	THTD010N	SCREW	9	
	THTD011J	SCREW	2	
<u>11</u>	TKGA5264	FRONT GLASS	1	
<u>12</u>	TKKC5239	PANEL LIGHT	1	
<u>13</u>	TKKL5231	M8 SPACER CAP	4	
<u>14</u>	TKKL5269	COVER	1	
<u>15</u>	TKPA94301	INLET COVER	1	
<u>16</u>	TKPB01102	DOOR	1	
<u>17</u>	TKRA51701	REAR COVER HANDLE	2	
	TMKG659	SPONGE(FRONT GLASS H)	2	
	TMKG660	SPONGE(FRONT GLASS V)	2	
	TMKG666	SPONGE	3	
	TMM15481	CLAMPER	4	
	TMM17499	CLAMPER	1	
	TMM25401	CLAMPER	8	
	TMM7464-2	CLAMPER	2	
	TMM7468-1	CLAMPER	1	
	TMME047	CLAMPER	3	
	TMME061	CLAMPER	6	
	TMME190	CLAMPER	2	
	TMME226	CLAMPER	1	
	TMME258	CLAMPER	2	
	TMME260	CLAMPER	5	
	TMMJ068	RUBBER (FAN)	9	
	TMMX133	M8-SPACER	4	
	TMMX136	BC HOOK LEFT	1	
	TMMX137	BC HOOK RIGHT	1	
<u>18</u>	TMZX5058	STAND BRACKET	2	
<u>19</u>	TPCB92501	CARTON BOX TOP	1	TH-42PV60A 
19	TPCB92502	CARTON BOX TOP	1	TH-42PV60H 
19	TPCB92503	CARTON BOX TOP	1	TH-42PV60M 
19	TPCB92504	CARTON BOX TOP	1	TH-42PV60MT 

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
20	TPCB92601	CARTON BOX BOTTOM	1	
21	TPD169487	JOINT	4	
22	TPDA1270	CUSHION TOP	1	
23	TPDA1271	CUSHION BOTTOM	1	
24	TPDF0737	PAPER BOX	1	
25	TPDF1582	TOP PAD	1	
26	TPEH170	PROTECT COVER	1	
27	TPEH273	TOP-PROTECT SHEET	1	
28	TQBC2089	INSTRUCTION BOOK(ENGLISH)	1	TH-42PV60A 
28	TQBC2090	INSTRUCTION BOOK(ENGLISH)	1	TH-42PV60H/M/MT 
28	TQBC2091	INSTRUCTION BOOK(CHINA)	1	TH-42PV60H 
28	TQBC2092	INSTRUCTION BOOK(ARABIAN)	1	TH-42PV60M 
28	TQBC2093	INSTRUCTION BOOK(PERSIAN)	1	TH-42PV60M 
28	TQBC2094	INSTRUCTION BOOK(THAI)	1	TH-42PV60MT 
	TSXL513	CABLE(D31-C11/D32-C21)	2	
	TSXL519	CABLE (C12-C22)	1	
	TSXL520	CABLE (DG1-H1)	1	
	TSXL521	CABLE (DG15-HC15)	1	
	TSXL522	CABLE(DG20-PA20)	1	
	TSXL523	CABLE(DG3-D3)	1	
29	TTUA1347	REAR COVER	1	TH-42PV60A 
29	TTUA1403	REAR COVER	1	TH-42PV60H 
29	TTUA1404	REAR COVER	1	TH-42PV60M 
29	TTUA1434	REAR COVER	1	TH-42PV60MT 
30	TXFKE01BJTA	ESCUTCHEON ASSY	1	
	TXJ/SPBJTU	SPEAKER LEAD(RELAY-SP)	2	
	XTB4+12GFJ	SCREW	45	
	XTB4+12GFJK	SCREW	8	
	XTB4+16GFJ	SCREW	2	
	XTV3+10JFJK	SCREW	6	
	XTW3+10TFJ	SCREW	3	
	XYN3+F10FJ	SCREW	1	
	XYN3+F10FJ	SCREW	1	
	XYN3+F6FJ	SCREW	1	
	XYN3+F8FJ	SCREW	35	
	XYN3+J12FJ	SCREW	31	
	XYN3+J8FJ	SCREW	14	
	XYN4+E8FJ	SCREW	1	
	XYN4+F10FJK	SCREW	6	
	XYN4+F30FJK	SCREW	18	
	XYN5+C15FJ	SCREW	8	
31	XZBT6506	POLY BAG	1	

16. Electrical Replacement Parts List

16.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 $\underline{C}$ 100KOHM, $\underline{J}$, 1/4W
Type Allowance

2. Capacitor

Example:

ECKF1H103ZF $\underline{C}$ 0.01UF, $\underline{Z}$, 50V
Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
J : $\pm 5\text{pF}$	J : $\pm 5\text{pF}$
K : $\pm 10\text{pF}$	K : $\pm 10\text{pF}$
L : $\pm 15\text{pF}$	L : $\pm 15\text{pF}$
M : $\pm 20\text{pF}$	M : $\pm 20\text{pF}$
P : $\pm 100\%$, -0%	P : $\pm 100\%$, -0%
Z : $\pm 80\%$, -20%	Z : $\pm 80\%$, -20%

16.2. Electrical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401.402	K5D802BNA005	TIME LAG FUSE HIGH	2	
C002	ECA1HM100	E 10UF, 50V	1	
C003	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C006	ECA0JM102	E 1000UF, 6.3V	1	
C008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C009	ECJ1XC1H101J	C 100PF, J, 50V	1	
C010,11	ECJ1VC1H330J	C 33PF, J, 50V	2	
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1MN20BA0231	20P CONNECTOR	1	
C016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C020	ECA0JM102	E 1000UF, 6.3V	1	TH-42PV60H/M/MT
C021	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PV60H/M/MT
C21	K1MN55BA0076	55P CONNECTOR	1	
C022	ECJ1XC1H101J	C 100PF, J, 50V	1	TH-42PV60H/M/MT
C22	K1MN20BA0231	20P CONNECTOR	1	
C23	K1KA12BA0107	12P CONNECTOR	1	
C024	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	TH-42PV60H/M/MT
C029,30	ECJ1VC1H330J	C 33PF, J, 50V	2	
C040	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PV60H/M/MT
C041,42	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C043	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	TH-42PV60H/M/MT
C1100	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1102	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1103	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1105	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1106	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1107	EEH0B0G101R	C 100PF, J, 4V	1	
C1109-11	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C1112	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1114	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1116	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1118-23	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C1125	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1127-32	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C1133,34	ECJ1XC1H150J	C 15PF, J, 50V	2	
C1135-42	ECJ0EB1A104K	C 0.1UF, K, 10V	8	
C1144-50	ECJ0EB1A104K	C 0.1UF, K, 10V	7	
C1152	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1153	EEH0B0G101R	C 100PF, J, 4V	1	
C1154	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1155	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C1156,57	ECJ1XC1H220J	C 22PF, J, 50V	2	
C1158	F1J0J1060004	C 0.010UF, K, 16V	1	
C1159	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1160	F2G0J470A019	C 47PF, J, 6.3V	1	
C1161	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1162	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C1167,68	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C1172	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1177	ECJ1VB1A334K	C 0.1UF, K, 16V	1	
C1178	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1190	ECJ0EB1C103K	C0.010UF, K, 16V	1	

00000	0000000000	0000000000	0	
-------	------------	------------	---	--

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1209	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1212	ECJ1XC1H151J	C 150PF, J, 50V	1	
C1219,20	EEEHP1C100R	C 10PF, J, 16V	2	
C1221	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C1222,23	F1J0J1060004	C 0.010UF, K, 16V	2	
C1226	F1J0J1060004	C 0.010UF, K, 16V	1	
C1227	ECJ0EB1H101K	C 100PF, K, 50V	1	
C1228-34	EEEHB1C470P	C 47PF, J, 16V	7	
C1294	ECJ1XC1H330J	C 33PF, J, 50V	1	
C2005,06	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2010,11	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2013,14	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2016,17	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2019	ECA1CM221	E 220UF, 16V	1	
C2020	ECA1HM220	E 22UF, 50V	1	
C2021,22	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2111	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2116	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2118,19	ECEA1CN470U	E 47UF, 16V	2	
C2125,26	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2127	ECA1CMH101	E 100UF, 16V	1	
C2128	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2129,30	F1J1A1050002	C 1UF, Z, 50V	2	
C2131	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2132	EEEHB1C100R	C 10PF, J, 16V	1	
C2133,34	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2139-43	ECJ1VB1H103K	C 0.001UF, K, 50V	5	
C2146	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2147	ECA1HM220	E 22UF, 50V	1	
C2148-50	ECJ2FB1C105K	C 1UF, K, 16V	3	
C2152	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2153	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2154	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2155	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2157	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2159,60	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2161	ECA1CMH101	E 100UF, 16V	1	
C2162-65	ECJ2FB1C105K	C 1UF, K, 16V	4	
C2168,69	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2170-72	ECJ1VB1H102K	C 1000PF, K, 50V	3	
C2173	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2174	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2175-77	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C2178,79	EEEHB1C100R	C 10PF, J, 16V	2	
C2181	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2183	EEEHB1H3R3R	C 3.3PF, J, 50V	1	
C2184,85	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2189,90	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2191	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2192	EEEHB1C100R	C 10PF, J, 16V	1	
C2195	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2196	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2197	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C2198	EEEHB0J101P	C 100PF, J, 6.3V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2199	ECJ1VC1H560J	C 56PF, J, 50V	1	
C2200	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2201	ECJ1XC1H030C	C 3PF, C, 50V	1	
C2202	ECJ1XC1H050C	C 5PF, C, 50V	1	
C2203	ECJ1VC1H100C	C 10PF, C, 50V	1	
C2204	ECJ1XC1H220J	C 22PF, J, 50V	1	
C2211	ECJ1VB1C104K	C 0.1UF, K, 16V	1	
C2213	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C2217	F1H0J1050012	C 1UF, K, 16V	1	
C2222	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2223	ECJ1XC1H390J	C 39PF, J, 50V	1	
C2225	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2226	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2227	ECA1CMH101	E 100UF, 16V	1	
C2228	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2229,30	ECA1CMH101	E 100UF, 16V	2	
C2231	ECA1CHG470	E 47UF, 16V	1	
C2232	F1H0J1050012	C 1UF, K, 16V	1	
C2233,34	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2235	F1H0J1050012	C 1UF, K, 16V	1	
C2236	ECA1CHG470	E 47UF, 16V	1	
C2237-40	ECJ1VB1H103K	C 0.001UF, K, 50V	4	
C2301	ECA1EHG471	E 470UF, 25V	1	
C2303	ECA1CMH101	E 100UF, 16V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2314	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C2317	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2320	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2321	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2322	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2323,24	ECJ2FB1E224K	C 22UF, K, 25V	2	
C2325,26	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2327	F1J1H474A757	C 0.47UF, 50V	1	
C2328-31	ECJ2FB1E105K	C 1UF, K, 25V	4	
C2332,33	ECA1EHG471	E 470UF, 25V	2	
C2334,35	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2336	F1J1H474A757	C 0.47UF, 50V	1	
C2337,38	ECJ2FB1E224K	C 22UF, K, 25V	2	
C2341	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C2342	ECJ2FB1E105K	C 1UF, K, 25V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2373	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2374	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2380	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2382	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C2385	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2387	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2393,94	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C2401	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2402	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C2403	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2417	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2510,11	ECJ2VF1C105Z	C 1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2521	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3005	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3021-25	F1J1A1050002	C 1UF, Z, 50V	5	
C3026	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3027,28	F1J1A1050002	C 1UF, Z, 50V	2	
C3029	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3030	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3031	F1J1A1050002	C 1UF, Z, 50V	1	
C3033	F1J1A1050002	C 1UF, Z, 50V	1	
C3035	F1J1A1050002	C 1UF, Z, 50V	1	
C3036	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3038	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3039	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3041	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3043	F1J1A1050002	C 1UF, Z, 50V	1	
C3045	F1J1A1050002	C 1UF, Z, 50V	1	
C3046	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3047	F1J1A1050002	C 1UF, Z, 50V	1	
C3048	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3049,50	F1J1A1050002	C 1UF, Z, 50V	2	
C3051-53	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C3054-56	F1J1A1050002	C 1UF, Z, 50V	3	
C3058	ECA1EM471	E 470UF, 25V	1	
C3059,60	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C3062-64	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3065	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3067	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3069	ECA1EM471	E 470UF, 25V	1	
C3070	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3075	ECA1CM221	E 220UF, 16V	1	
C3207	ECJ2FB1C105K	C 1UF, K, 16V	1	
C3208	ECJ2FB1C474K	C 0.47UF, Z, 16V	1	
C3214	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3216	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3226-28	ECJ2FF1A106Z	C 0.001UF, Z, 10V	3	
C3230	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3233	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3241	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3248	ECJ2FB1C105K	C 1UF, K, 16V	1	
C3249	ECJ2FB1C474K	C 0.47UF, Z, 16V	1	
C3251	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3252	ECJ2FB1C105K	C 1UF, K, 16V	1	
C3253,54	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C3256	ECJ2FB1C105K	C 1UF, K, 16V	1	
C3257	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3262	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3268	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3305	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3330	ECA1CM470	E 47UF, 16V	1	
C3331	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C3332	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3334	ECEA1CN470U	E 47UF, 16V	1	
C3335	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3336	ECEA1CN470U	E 47UF, 16V	1	
C3337	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3338	ECEA1CN470U	E 47UF, 16V	1	
C3339	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3340-42	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3701	ECJ2XC1H561K	C 560PF, K, 50V	1	
C3703	ECJ2XC1H561K	C 560PF, K, 50V	1	
C3711,12	ECJ2VF1H333Z	C 0.033UF, Z, 50V	2	
C3750,51	ECJ2XC1H102K	C 1000PF, K, 50V	2	
C4003-08	F1J0J1060004	C 0.010UF, K, 16V	6	
C4009	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4012,13	ECJ1XC1H180J	C 18PF, J, 50V	2	TH-42PV60H/M/MT
C4014,15	F1J0J1060004	C 0.010UF, K, 16V	2	
C4023	F1J0J1060004	C 0.010UF, K, 16V	1	
C4026	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4027	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4028	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4112	F1J0J1060004	C 0.010UF, K, 16V	1	
C4117	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4142	F1H1C104A065	C 0.1UF, K, 16V	1	TH-42PV60H/M/MT
C4144-46	ECJ1XC1H050C	C 5PF, C, 50V	3	TH-42PV60H/M/MT
C4148-51	ECJ1VB1A105K	C 0.01UF, Z, 50V	4	TH-42PV60H/M/MT
C4157	F1J0J1060004	C 0.010UF, K, 16V	1	TH-42PV60H/M/MT
C4158	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4159	F1H1C104A065	C 0.1UF, K, 16V	1	
C4160	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4161,62	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	TH-42PV60H/M/MT
C4165	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4168	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4169	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4171	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4172,73	F1H1C104A065	C 0.1UF, K, 16V	2	
C4174	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4175	F1H1C104A065	C 0.1UF, K, 16V	1	
C4176	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4177	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4178	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4180	F1H1C104A065	C 0.1UF, K, 16V	1	
C4181	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-42PV60H/M/MT
C4182	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4185,86	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C4187	F2G0J470A019	C 47PF, J, 6.3V	1	TH-42PV60H/M/MT
C4188	F1J0J1060004	C 0.010UF, K, 16V	1	
C4189-91	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4192	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4193	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4194-97	F1H1C104A065	C 0.1UF, K, 16V	4	
C4198	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4199	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4200	F2G0J470A019	C 47PF, J, 6.3V	1	
C4201	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4204	ECJ0EB1A104K	C 0.1UF, K, 10V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4205,06	F1H1C104A065	C 0.1UF, K, 16V	2	
C4208,09	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4211	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4212	EEH0B0G221P	C 220PF, J, 4V	1	TH-42PV60H/M/MT
C4213	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4214	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4215	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4216	F2G0J470A019	C 47PF, J, 6.3V	1	
C4217	F1H1C104A065	C 0.1UF, K, 16V	1	
C4218	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4219	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4220	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-42PV60H/M/MT
C4224	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4225	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4226	ECJ1XC1H680J	C 68PF, J, 50V	1	TH-42PV60H/M/MT
C4227	ECJ1VB1C823K	C 0.082UF, K, 16V	1	
C4228	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4229	F1H1C104A065	C 0.1UF, K, 16V	1	TH-42PV60H/M/MT
C4230-34	ECJ0EB1A104K	C 0.1UF, K, 10V	5	TH-42PV60H/M/MT
C4235	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4236-42	ECJ0EB1A104K	C 0.1UF, K, 10V	7	TH-42PV60H/M/MT
C4243	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4244	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4245	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4246	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4248	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4250,51	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-42PV60H/M/MT
C4252	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	TH-42PV60H/M/MT
C4253	F2G0J470A019	C 47PF, J, 6.3V	1	
C4255	ECJ1VB1H562K	C 5600PF, K, 50V	1	TH-42PV60H/M/MT
C4256	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4257	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	TH-42PV60H/M/MT
C4258	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4259	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	TH-42PV60H/M/MT
C4261	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4262-64	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4265	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4267,68	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-42PV60H/M/MT
C4269	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4270	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-42PV60H/M/MT
C4272	F2G0J470A019	C 47PF, J, 6.3V	1	
C4273	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4274,75	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-42PV60H/M/MT
C4276,77	ECJ1VB0J225K	C 2.2UF, K, 6.3V	2	TH-42PV60H/M/MT
C4281-84	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C4287,88	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4289,90	EEH0B0J330R	C 33PF, J, 6.3V	2	
C4291,92	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4296	F1J0J1060004	C 0.010UF, K, 16V	1	
C4297	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4298-06	ECJ1VB1A105K	C 0.01UF, Z, 50V	9	
C4307-09	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4310	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4311	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4312	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4313,14	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4315	F1J0J1060004	C 0.010UF, K, 16V	1	
C4316-18	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4320-22	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4325	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4327	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4329,30	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4331	F1J0J1060004	C 0.010UF, K, 16V	1	
C4332	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4333-38	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C4339	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4340	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4341	EEH1B1C470P	C 47PF, J, 16V	1	
C4342	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4343	EEH1B1C100R	C 10PF, J, 16V	1	
C4344,45	F1J0J1060004	C 0.010UF, K, 16V	2	
C4346	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4347	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4348	EEH1B1C470P	C 47PF, J, 16V	1	
C4349	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4350,51	ECJ1XC1H181J	C 180PF, J, 50V	2	
C4352,53	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4354	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4360	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4362	F1J0J1060004	C 0.010UF, K, 16V	1	
C4363,64	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4365	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4366	F2G0J470A019	C 47PF, J, 6.3V	1	
C4367	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4371	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4372	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4373	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4374	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4375,76	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4377	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4379	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4380	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4381,82	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4383	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4384	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4385	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4386	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4387	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4388	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4389	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4390	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4391	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4392	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4393,94	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4395	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4396	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4397,98	ECJ0EB1A104K	C 0.1UF, K, 10V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4399,00	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4401	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4402,03	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4404	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4405	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4406	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4407,08	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4409	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4410	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4411,12	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4413,14	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4415	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4417	F2G0J470A019	C 47PF, J, 6.3V	1	
C4418,19	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4420,21	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4422-24	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C4425,26	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4427	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4428	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4429,30	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4434	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4435	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4436-39	ECJ0EB1H102K	C 1000PF, K, 50V	4	
C4440	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4441,42	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4447	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4448	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4451	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4452	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4453,54	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4455	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4456	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4457,58	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4459	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4460	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4462	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4464	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4465	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4466	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4467	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4470	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4474	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4475,76	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4478	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4479-81	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C4482	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4483	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4493	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4494	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4497	EEH0G101R	C 100PF, J, 4V	1	
C4498	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4499	EEFCD0G560ER	56UF,	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4502	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4503	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4504	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4505	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4506	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4507	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4508	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4509-11	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4512	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4513	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4514	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4515,16	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4517	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4518	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4519	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4520	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4521	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4522	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4523	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4524	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4525	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4526	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4527	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4528	F2G0J470A019	C 47PF, J, 6.3V	1	
C4529	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4530,31	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4532,33	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4534	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4536	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4537	EEHBOG101R	C 100PF, J, 4V	1	
C4538	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4539	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4540	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4541	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4543	F1H1C104A065	C 0.1UF, K, 16V	1	
C4544	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E471	E 470UF, 25V	1	
C5606	ECA1CM471	E 470UF, 16V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	F2A1H331A257	E 330UF, 50V	1	
C5612	ECA1CM471	E 470UF, 16V	1	
C5613	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5616	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5617	ECA1CM471	E 470UF, 16V	1	
C5618,19	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C5622	ECA1CM471	E 470UF, 16V	1	
C5623	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5626	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5633	ECA1EM221	E 220UF, 25V	1	
C5637	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5641-44	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C5645	ECA1CHG470	E 47UF, 16V	1	
C5646	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C5647	ECA1CHG470	E 47UF, 16V	1	
C5648	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C5670	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,02	EEUFC1E471	E 470UF, 25V	2	
C5804	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C6001	F1L2J332A022	C 3300UF, K,6.3V	1	
C6002	F1L2J222A022	C 2200UF, K,6.3V	1	
C6011-15	F2A2T201A001	E 200UF,	5	
C6021	F1L2J562A022	C 5600UF, K,6.3V	1	
C6031	ECQE2255JF	P 2.5UF, K,250V	1	
C6041-44	TCUY1C105ZFN	C 1UF, 16V	4	
C6071	F1L2J1020001	C 1000UF, K,6.3V	1	
C6091	F1L2J1020001	C 1000UF, K,6.3V	1	
C6111,12	F2A2D221A022	E 220UF, 200V	2	
C6132	F1L1E4750004	C 4.7UF, 25V	1	
C6134,35	F1L1E4750004	C 4.7UF, 25V	2	
C6151	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6152-55	F1L1E4750004	C 4.7UF, 25V	4	
C6192	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6194,95	F1L1E4750004	C 4.7UF, 25V	2	
C6201,02	F0C2E405A176	E 0.040UF, 250V	2	
C6211,12	F1L1E4750004	C 4.7UF, 25V	2	
C6213,14	ECA1EM471	E 470UF, 25V	2	
C6221	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6241	ECA1EM471	E 470UF, 25V	1	
C6242	TCUY1C105ZFN	C 1UF, 16V	1	
C6243	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6251	TCUY1C105ZFN	C 1UF, 16V	1	
C6261,62	ECA2CM101	E 100UF, 160V	2	
C6271	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6272,73	EEUFC1E221	E 220UF, 25V	2	
C6401	F1L2J332A022	C 3300UF, K,6.3V	1	
C6402	F1L2J222A022	C 2200UF, K,6.3V	1	
C6411-15	F2A2T201A001	E 200UF,	5	
C6421	F1L2J562A022	C 5600UF, K,6.3V	1	
C6431	F0C2E405A176	E 0.040UF, 250V	1	
C6471	F1L2J1020001	C 1000UF, K,6.3V	1	
C6472	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6480	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6491	F1L2J1020001	C 1000UF, K,6.3V	1	
C6502	F1L1E4750004	C 4.7UF, 25V	1	
C6504,05	F1L1E4750004	C 4.7UF, 25V	2	
C6511,12	F0C2E405A176	E 0.040UF, 250V	2	
C6521	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6522	F1L1E4750004	C 4.7UF, 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6524,25	F1L1E4750004	C 4.7UF, 25V	2	
C6527	F1L1E4750004	C 4.7UF, 25V	1	
C6561	F2A1A1010074	E 100UF, 10V	1	
C6563	F2A1A1010074	E 100UF, 10V	1	
C6565,66	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C6581	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6582	TCUY1C105ZFN	C 1UF, 16V	1	
C6591	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6592	ECA1EM471	E 470UF, 25V	1	
C6593	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6601,02	F1L1E4750004	C 4.7UF, 25V	2	
C6603	F1K2J102A014	C 1000UF, K,6.3V	1	
C6604	F2A2V470A020	E 47UF, 350V	1	
C6605	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6606	F1K2J102A014	C 1000UF, K,6.3V	1	
C6620	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6641	ECQE2224KF	P 2.2UF, K,250V	1	
C6661,62	F1K2J102A014	C 1000UF, K,6.3V	2	
C6671	F1L1E4750004	C 4.7UF, 25V	1	
C6681,82	F1L1E4750004	C 4.7UF, 25V	2	
C6683	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6691	ECA2CM101	E 100UF, 160V	1	
C6701-08	ECJ2XB1H104K	C 0.1UF, K, 50V	8	
C6721	ECA1HM101	E 100UF, 50V	1	
C6723-25	F1L1E4750004	C 4.7UF, 25V	3	
C6726,27	TCUY1C105ZFN	C 1UF, 16V	2	
C6728	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6752	TCUY1C105ZFN	C 1UF, 16V	1	
C6753	F1L1E4750004	C 4.7UF, 25V	1	
C6754	ECA1VM470	E 47UF, 35V	1	
C6755	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6771	TCUY1C105ZFN	C 1UF, 16V	1	
C6772,73	F1L1E4750004	C 4.7UF, 25V	2	
C6775	F1L1E4750004	C 4.7UF, 25V	1	
C6776,77	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6791	EEUFC1E221	E 220UF, 25V	1	
C6795,96	EEUFC1E221	E 220UF, 25V	2	
C6802	EEUFC1E221	E 220UF, 25V	1	
C6803	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6804	F2A2E100A022	E 10UF, 250V	1	
C6805	TCUY1C105ZFN	C 1UF, 16V	1	
C6806,07	ECA2CM101	E 100UF, 160V	2	
C6811	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6812	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6822	F2A2V100A019	E 10UF, 350V	1	
C6823	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6841,42	ECA2CM101	E 100UF, 160V	2	
C6845	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6861	TCUY1C105ZFN	C 1UF, 16V	1	
C6862	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6863	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6871	TCUY1C105ZFN	C 1UF, 16V	1	
C6872	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6873	ECJ2XB1H103K	C 0.01UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6901	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6902	TCUY1C105ZFN	C 1UF, 16V	1	
C6904	TCUY1C105ZFN	C 1UF, 16V	1	
C6906	TCUY1C105ZFN	C 1UF, 16V	1	
C6908	TCUY1C105ZFN	C 1UF, 16V	1	
C6910	TCUY1C105ZFN	C 1UF, 16V	1	
C6912	TCUY1C105ZFN	C 1UF, 16V	1	
C6914-18	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6931	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6932-35	F1L2E105A013	E 0.10UF, 25V	4	
C6951	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6952	TCUY1C105ZFN	C 1UF, 16V	1	
C6955	TCUY1C105ZFN	C 1UF, 16V	1	
C6957,58	TCUY1C105ZFN	C 1UF, 16V	2	
C6961	TCUY1C105ZFN	C 1UF, 16V	1	
C6963	TCUY1C105ZFN	C 1UF, 16V	1	
C6964-68	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6981	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6982-85	F1L2E105A013	E 0.10UF, 25V	4	
C7108	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7110	TCUY1C105ZFN	C 1UF, 16V	1	
C7111,12	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7114	TCUY1C105ZFN	C 1UF, 16V	1	
C7115	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7116	TCUY1C105ZFN	C 1UF, 16V	1	
C7117	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7119	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7121	TCUY1C105ZFN	C 1UF, 16V	1	
C7122	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7123	TCUY1C105ZFN	C 1UF, 16V	1	
C7124	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7126	TCUY1C105ZFN	C 1UF, 16V	1	
C7127	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7134	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7137,38	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7140	TCUY1C105ZFN	C 1UF, 16V	1	
C7141	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7143	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7145	TCUY1C105ZFN	C 1UF, 16V	1	
C7146	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7148	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7201	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7203	TCUY1C105ZFN	C 1UF, 16V	1	
C7204,05	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7208	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7209	TCUY1C105ZFN	C 1UF, 16V	1	
C7210	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7212	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7214	TCUY1C105ZFN	C 1UF, 16V	1	
C7215	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7216	TCUY1C105ZFN	C 1UF, 16V	1	
C7217	ECJ1XC1H101J	C 100PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7219	TCUY1C105ZFN	C 1UF, 16V	1	
C7220	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7223	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7225	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7227	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7229	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7235	TCUY1C105ZFN	C 1UF, 16V	1	
C7236	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7238	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7240	TCUY1C105ZFN	C 1UF, 16V	1	
C7241	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7244	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9028,29	F1J0J1060004	C 0.010UF, K, 16V	2	
C9033,34	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9035,36	F1J0J1060004	C 0.010UF, K, 16V	2	
C9037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C9039	F1J0J1060004	C 0.010UF, K, 16V	1	
C9040	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9044-53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	10	
C9055-57	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9058	F1J0J1060004	C 0.010UF, K, 16V	1	
C9467,68	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9469	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500-06	ECJ1XB1C104K	C 0.1UF, Z, 16V	7	
C9508	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9509	ECJ1VC1H200J	C 20PF, C, 50V	1	
C9510	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9511	F1J0J1060004	C 0.010UF, K, 16V	1	
C9512	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9514,15	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9516-25	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9526	F1J0J1060004	C 0.010UF, K, 16V	1	
C9527-30	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9531	F1J0J1060004	C 0.010UF, K, 16V	1	
C9800	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9801	ECJ1VB1E272K	C 2700PF, K, 25V	1	
C9802	ECJ1XC1H470J	C 47PF, J, 50V	1	
C9803	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9804	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9805	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9806	ECGRL0G680ER	C 68PF, J, 4V	1	
C9807,08	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9809	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9815,16	ECGRL0G680ER	C 68PF, J, 4V	2	
C9817,18	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9822	F1J0J1060004	C 0.010UF, K, 16V	1	
C9823,24	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9825	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9827	F1J0J1060004	C 0.010UF, K, 16V	1	
C9830-32	ECJ3XB1C106M	C 1.0UF, K, 16V	3	
C9833	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9837	ECJ3XB1C106M	C 1.0UF, K, 16V	1	
C9838	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9839	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9840	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9841,42	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9843	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9844	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9845,46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9847,48	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C9880,81	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C9882	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9883	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9884	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9885	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9886	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9887	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9891	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9896	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9897	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9898	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9899	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9900-51	ECJ1XB1C104K	C 0.1UF, Z, 16V	52	
C9952-54	EEFCD0G560ER	56UF,	3	
C9955-59	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C9960-64	ECJ3XB0J106M	C 10UF, M,6.3V	5	
C9965	EEFCD0G560ER	56UF,	1	
C9966	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9967	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9971	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KY40B00003	40P CONNECTOR	1	
D5	K1KB31BA0064	31P CONNECTOR	1	
D6	K1KA21A00011	21P CONNECTOR	1	
D20	K1KA20BA0296	20P CONNECTOR	1	
D25	K1KA20B00155	20P CONNECTOR	1	
D31,32	K1MN55BA0094	55P CONNECTOR	2	
D1106,07	MA729	DIODE	2	
D1117	MA3036L	ZENER DIODE	1	
D1119	MA704A	DIODE	1	
D1121	MA729	DIODE	1	
D2011-14	MA111	DIODE	4	
D2119	B0BC01100001	ZENER DIODE	1	
D2300,01	MA111	DIODE	2	
D2303,04	MA111	DIODE	2	
D2309	MA111	DIODE	1	
D2510,11	MA8056-M	ZENER DIODE	2	
D2512	MA8043LTX	ZENER DIODE	1	
D2520	LNJ107W5PRW	LED	1	
D2524	MA8056-M	ZENER DIODE	1	
D3003	MA8140M	ZENER DIODE	1	
D3005,06	MA8140M	ZENER DIODE	2	
D3017	MA8140M	ZENER DIODE	1	
D3021-23	MA111	DIODE	3	
D3024	B0BC01100001	ZENER DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D3038-43	MA8140M	ZENER DIODE	6	
D3044	MA111	DIODE	1	
D3045-52	MA8140M	ZENER DIODE	8	
D3100	MA8140M	ZENER DIODE	1	
D3334-39	MA111	DIODE	6	
D3702	MA8140M	ZENER DIODE	1	
D4019-38	EZJZ0V80008B	VARISTOR	20	
D4041	EZJZ0V80008B	VARISTOR	1	
D4044,45	EZJZ0V80008B	VARISTOR	2	
D4047,48	MA3056M	ZENER DIODE	2	
D4049-52	B0HCMM000014	DIODE	4	
D5606	B0BC01100001	ZENER DIODE	1	
D5607	B0BC6R600005	ZENER DIODE	1	
D5610	B0BC4R700007	ZENER DIODE	1	(PA)
D5610	MA3X78900L	ZENER DIODE	1	(H)
D5612	B0BC3R700006	ZENER DIODE	1	
D5618	B0BC03900015	ZENER DIODE	1	
D5634	MA111	DIODE	1	
D5635	MA3047H	ZENER DIODE	1	
D5637,38	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3120M	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5646,47	MA152	DIODE	2	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,06	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6001	B0HBSN000008	DIODE	1	
D6021	B0HBSN000008	DIODE	1	
D6032	MA111	DIODE	1	
D6041	B0ECHP000003	DIODE	1	
D6051	B0ECHP000003	DIODE	1	
D6061,62	B0HBSN000008	DIODE	2	
D6071,72	B0HBSN000008	DIODE	2	
D6081,82	B0HBSN000008	DIODE	2	
D6091	B0HBSN000008	DIODE	1	
D6092	B0ECHP000003	DIODE	1	
D6101-04	B0JCME000037	DIODE	4	
D6131,32	B0ECHP000003	DIODE	2	
D6151-54	B0ECHP000003	DIODE	4	
D6191,92	B0ECHP000003	DIODE	2	
D6211	B0JCME000037	DIODE	1	
D6221	B0ECHP000003	DIODE	1	
D6222,23	MA111	DIODE	2	
D6251,52	MA8330M	ZENER DIODE	2	
D6253	LNJ301MPUJA	LED	1	
D6254	MA8051L	ZENER DIODE	1	
D6255	MA111	DIODE	1	
D6401,02	B0HBSN000008	DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6431,32	B0HBSP000019	DIODE	2	
D6441	B0ECHP000003	DIODE	1	
D6451	B0ECHP000003	DIODE	1	
D6461,62	B0HBSN000008	DIODE	2	
D6466	MA111	DIODE	1	
D6471	B0HBSN000008	DIODE	1	
D6472	B0ECHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	B0HCKS000002	DIODE	1	
D6480	MA111	DIODE	1	
D6481,82	B0HBSN000008	DIODE	2	
D6491	B0HBSP000019	DIODE	1	
D6497	MA111	DIODE	1	
D6501,02	B0ECHP000003	DIODE	2	
D6521-24	B0ECHP000003	DIODE	4	
D6581,82	MA8330M	ZENER DIODE	2	
D6583	LNJ301MPUJA	LED	1	
D6584	MA8051L	ZENER DIODE	1	
D6585	MA111	DIODE	1	
D6601	MA8240M	ZENER DIODE	1	
D6602	B0ECHP000003	DIODE	1	
D6603	MA8240M	ZENER DIODE	1	
D6604	MA111	DIODE	1	
D6605	MA8051L	ZENER DIODE	1	
D6606	B0HCMM000014	DIODE	1	
D6607	MA111	DIODE	1	
D6619,20	B0HCKS000002	DIODE	2	
D6621	B0HDSM000005	DIODE	1	
D6623,24	B0HDSM000005	DIODE	2	
D6641,42	B0HCKS000002	DIODE	2	
D6643	MA111	DIODE	1	
D6661	MA111	DIODE	1	
D6662-64	MA8330M	ZENER DIODE	3	
D6665	MA8051L	ZENER DIODE	1	
D6666,67	MA111	DIODE	2	
D6671	MA111	DIODE	1	
D6682	B0HCMM000014	DIODE	1	
D6683,84	MA111	DIODE	2	
D6686,87	MA111	DIODE	2	
D6701,02	MA8056H	ZENER DIODE	2	
D6721	B0HCKS000002	DIODE	1	
D6723,24	B0JCME000037	DIODE	2	
D6725	B0ECHP000003	DIODE	1	
D6726-33	MA8056H	ZENER DIODE	8	
D6734	MA111	DIODE	1	
D6752	B0JCME000037	DIODE	1	
D6758	B0ECHP000003	DIODE	1	
D6760,61	MA111	DIODE	2	
D6771	B0JCME000037	DIODE	1	
D6773	B0HCKS000002	DIODE	1	
D6791	MA8200M	ZENER DIODE	1	
D6801,02	B0JCME000037	DIODE	2	
D6803	MA111	DIODE	1	
D6804	B0ECHP000003	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6805	MA111	DIODE	1	
D6806	B0EHP000003	DIODE	1	
D6822,23	MA111	DIODE	2	
D6825	MA8330M	ZENER DIODE	1	
D6826	MA111	DIODE	1	
D6841	B0EHP000003	DIODE	1	
D6842,43	MA111	DIODE	2	
D6859	B0EHP000003	DIODE	1	
D6860	B0HCKS000002	DIODE	1	
D6861	MA8051L	ZENER DIODE	1	
D6862	MA111	DIODE	1	
D6871	MA8051L	ZENER DIODE	1	
D6872	MA111	DIODE	1	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	B0EHP000003	DIODE	2	
D6951,52	MA8056H	ZENER DIODE	2	
D6953,54	B0EHP000003	DIODE	2	
D9017-19	MA3033	ZENER DIODE	3	
D9020	MA728	DIODE	1	
D9300,01	MA152K	DIODE	2	
D9800	B0JCME000037	DIODE	1	
D9801	B0JCDD000002	DIODE	1	
D9802	MA728	DIODE	1	
D9804	MA152K	DIODE	1	
D9805,06	B0JCGD000002	DIODE	2	
D9807,08	MA152K	DIODE	2	
D9809,10	B0JCGD000002	DIODE	2	
D9811	MA728	DIODE	1	
D9812	B0JCME000037	DIODE	1	
D9813	B0JCDD000002	DIODE	1	
D9814	B0JCME000037	DIODE	1	
D9815	B0JCDD000002	DIODE	1	
DG1	K1KY80A00011	80P CONNECTOR	1	
DG2	K1KA15B00074	15P CONNECTOR	1	
DG3	K1KY40B00003	40P CONNECTOR	1	
DG5	K1KB21BA0063	21P CONNECTOR	1	
DG7	K1KA20B00155	20P CONNECTOR	1	
DG8,G9	K1FY119D0001	CONNECTOR	2	
DG15	K1KY40B00003	40P CONNECTOR	1	
DG20	K1MN40B00045	40P CONNECTOR	1	
DG35	K1KA07BA0047	7P CONNECTOR	1	
FL3301,02	J0HABB000003	LC FILTER	2	
FL3303-05	J0HABB000004	LC FILTER	3	
FL7101	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL9300,01	F1J1E1040022	LC FILTER	2	
FL9800,01	J0HABH000013	LC FILTER	2	
FL9803,04	J0HABH000012	LC FILTER	2	
FL9805-07	J0HABH000013	LC FILTER	3	
FL9900-02	F1J1E1040022	LC FILTER	3	
FL9903,04	J0HABH000013	LC FILTER	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
G1	K1KA12A00317	12P CONNECTOR	1	
G3	K1KA03BA0047	3P CONNECTOR	1	
G51	K1KA30AA0009	30P CONNECTOR	1	
GK3	K1KA03BA0061	3P CONNECTOR	1	
H1	K1KY80A00011	80P CONNECTOR	1	
H2	K1KA15A00148	15P CONNECTOR	1	
H5,H6	K1KA15AA0288	15P CONNECTOR	2	
H15	K1KA04AA0150	4P CONNECTOR	1	
H40	K1KA20AA0009	20P CONNECTOR	1	
H51	K1KA30AA0009	30P CONNECTOR	1	
HC01	K1KA21A00011	21P CONNECTOR	1	
HC12	K1KA09AA0190	9P CONNECTOR	1	
HC15	K1KY40B00003	40P CONNECTOR	1	
HC21	K1KA08AA0193	8P CONNECTOR	1	
HC22	K1KA11AA0194	11P CONNECTOR	1	
IC1100	C3ABPG000145	IC	1	
IC1101	TVRN774	IC	1	
IC1102	TVRN767	IC	1	TH-42PV60H/M/MT
IC1102	TVRN764	IC	1	TH-42PV60A
IC1103	MN103SB20RGL	IC	1	
IC1110	C0CBCAD00016	IC	1	
IC1111	C0EBY0000041	IC	1	
IC2103	AN77L08M	IC	1	
IC2104	C0ABBA000168	IC	1	
IC2105	AN15862A-VT	IC	1	
IC2106	C1AB00002468	IC	1	
IC2109	C1BB00000947	IC	1	
IC2302	C1AB00002451	IC	1	
IC2304	C0ABBA000168	IC	1	
IC2306	C0ABBA000168	IC	1	
IC2511	B3L000000020	IC	1	
IC3005	AN15867A-VT	IC	1	
IC3301	C0JBAZ002205	IC	1	
IC4013	C0CBCBF00009	IC	1	
IC4014	C0CBCAC00282	IC	1	TH-42PV60H/M/MT
IC4016	C0CBCAC00275	IC	1	
IC4017	C0CBCAC00282	IC	1	TH-42PV60H/M/MT
IC4018	C0CBCAC00275	IC	1	
IC4019	C1AB00002456	IC	1	
IC4020	C1AB00002202	IC	1	TH-42PV60H/M/MT
IC4022	TVRN916	IC	1	
IC4023	TVRN917	IC	1	
IC4025	C0FBBK000038	IC	1	
IC4026	C1AB00002442	IC	1	
IC4027	C0DBFFD00003	IC	1	
IC4028	C0ABBB000230	IC	1	
IC4029	C0CBCAC00282	IC	1	
IC4030	C0CBCBC00190	IC	1	
IC4032	C0DBGYY00052	IC	1	
IC4035	C0CBCAF00031	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC4036	C0JBAP000020	IC	1	
IC4037	MN84522-A	IC	1	
IC4038	C3ABQJ000048	IC	1	
IC4040	C0CBCAC00282	IC	1	TH-42PV60H/M/MT
IC5601A	N0BG2DE00001	IC	1	
IC5602	EHMDD9851	LINEAR IC	1	
IC5603	C0DBAJB00004	IC	1	
IC5604	C0DBZGC00067	IC	1	
IC5801	C0DBAZF00003	IC	1	
IC6131	C0ZBZ0000895	IC	1	
IC6151	C0ZBZ0001324	IC	1	
IC6191	C0ZBZ0000895	IC	1	
IC6211	C0ZBZ0001325	IC	1	
IC6221	C0DBEMB00005	IC	1	
IC6241	C0JBAZ000005	IC	1	
IC6251	NJM2903M	INTEGRATED CIRCUIT	1	
IC6471	C0DBEKA00003	IC	1	
IC6472	C0JBAA000377	IC	1	
IC6501	C0ZBZ0000895	IC	1	
IC6521	C0ZBZ0001324	IC	1	
IC6561,62	C0JBAZ000005	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601	C0ZBZ0001325	IC	1	
IC6602	C0JBAB000715	IC	1	
IC6671	C0ZBZ0001325	IC	1	
IC6681	C0ZBZ0001325	IC	1	
IC6682	C0JBAA000377	IC	1	
IC6721,22	C0JBAZ000994	IC	2	
IC6724,25	C0CBADC00089	IC	2	
IC6751	C0CBADC00089	IC	1	
IC6752	C0ZBZ0001325	IC	1	
IC6753	C0JBAB000715	IC	1	
IC6771	C0CBADC00089	IC	1	
IC6772	C0ZBZ0001325	IC	1	
IC6773,74	C0JBAA000377	IC	2	
IC6791	N0BF1FB00001	IC	1	
IC6801,02	C0DBEMB00005	IC	2	
IC6821	C0DBEMB00005	IC	1	
IC6841	C0DBEMB00005	IC	1	
IC6861	NJM2903M	INTEGRATED CIRCUIT	1	
IC6871	NJM2903M	INTEGRATED CIRCUIT	1	
IC6901-06	AN16072A-VT	IC	6	
IC6951-56	AN16072A-VT	IC	6	
IC7101-05	C0JBAZ001120	IC	5	
IC7201-05	C0JBAZ001120	IC	5	
IC9001	TVRN808	IC	1	
IC9002	C0ZBZ0001330	IC	1	
IC9003	TVRN805-1	IC	1	
IC9007	TVRN813	IC	1	
IC9011	C0EBF0000431	IC	1	
IC9200	C1ZBZ0003185	IC	1	
IC9303	TVRN819	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	PST9128NR	IC (LOGIC)	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9503,04	C0JBAZ000856	IC	2	
IC9800	C0DBAYY00054	IC	1	
IC9801	C0DBZFG00066	IC	1	
IC9802,03	C0JBAZ000856	IC	2	
IC9806	C0DBAHD00011	IC	1	
IC9807	C0DBAYY00054	IC	1	
IC9809	C0DBAYY00054	IC	1	
IC9900	MN84521-A	IC	1	
IC9901	C3ABQJ000051	IC	1	
JK2003	K2HA204A0038	JACK	1	
JK3001	K1FB315AA001	CONNECTOR	1	
JK3100	TJB0A639	TERMINAL	1	
JK3701C	K4AK22B00002	TERMINAL BOARD	1	
JS001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PV60H/M/MT
JS002	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PV60A
JS012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS027	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PV60H/M/MT
JS031	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PV60H/M/MT
JS1100-02	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
JS1109	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
JS1117	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
JS2021,22	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2031-33	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS2108,09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2123,24	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2300-03	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2319	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS2331	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3002	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3010-15	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS3023	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3029	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3033-35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3202	J0JCC0000241	CHIP INDUCTOR	1	
JS3205	J0JCC0000241	CHIP INDUCTOR	1	
JS3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3215	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3237	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3239	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3244,45	J0JCC0000241	CHIP INDUCTOR	2	
JS3246	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3252	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3255	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3256	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3265,66	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3302-04	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3307-12	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
JS3352	J0JCC0000241	CHIP INDUCTOR	1	
JS3354-59	J0JCC0000241	CHIP INDUCTOR	6	
JS3362,63	ERJ3GEY0R00	M 0 OHM, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS3368	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3402,03	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3404,05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3704,05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3707,08	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3711-14	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS3716	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-15	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	TH-42PV60H/M/MT
JS4016,17	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
JS4020,21	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-42PV60H/M/MT
JS4022-24	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
JS4025,26	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
JS4027,28	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
JS4029	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
JS4033-40	ERJ2GE0R00	M 0.0 OHM, J,0.063W	8	
JS4046	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
JS4069	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
JS4103,04	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
JS4111	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4112,13	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-42PV60H/M/MT
JS4122	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60A
JS4125	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
K1	K1KY12B00001	12P CONNECTOR	1	
L001	J0JGC0000021	CHIP INDUCTOR COIL	1	
L007	J0JCC0000241	CHIP INDUCTOR	1	
L010,11	J0JCC0000241	CHIP INDUCTOR	2	TH-42PV60H/M/MT
L013	J0JCC0000241	CHIP INDUCTOR	1	
L015	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-42PV60H/M/MT
L021	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L024	TSK1032	BEAD CHOKE	1	TH-42PV60H/M/MT
L025,26	J0JCC0000241	CHIP INDUCTOR	2	TH-42PV60H/M/MT
L028	J0JGC0000021	CHIP INDUCTOR COIL	1	TH-42PV60H/M/MT
L031,32	J0JGC0000021	CHIP INDUCTOR COIL	2	
L1101-04	J0JHC0000078	CHIP INDUCTOR	4	
L1109	J0JHC0000078	CHIP INDUCTOR	1	
L2001,02	J0JCC0000364	CHIP INDUCTOR	2	
L2003,04	TSK1032	BEAD CHOKE	2	
L2007,08	TSK1032	BEAD CHOKE	2	
L2011,12	TSK1032	BEAD CHOKE	2	
L2015,16	TSK1032	BEAD CHOKE	2	
L2107	TSK1032	BEAD CHOKE	1	
L2108	J0JCC0000241	CHIP INDUCTOR	1	
L2109,10	TSK1032	BEAD CHOKE	2	
L2111,12	J0JCC0000241	CHIP INDUCTOR	2	
L2115	J0JCC0000241	CHIP INDUCTOR	1	
L2117	ELESE6R8KA	PEAKING COIL	1	
L2118	EXCELD35C	BEAD CHOKE	1	
L2123	J0JCC0000241	CHIP INDUCTOR	1	
L2178,79	J0JCC0000241	CHIP INDUCTOR	2	
L2182-87	J0JCC0000241	CHIP INDUCTOR	6	
L2204	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L2205,06	J0JCC0000241	CHIP INDUCTOR	2	
L2300-03	G0C330MA0049	PEAKING COIL	4	
L2308	TALL08N3R9MA	INDUCTION COIL	1	
L3000	G0C101K00023	PEAKING COIL	1	
L3001-03	TSK1032	BEAD CHOKE	3	
L3009,10	TSK1032	BEAD CHOKE	2	
L3013	TSK1032	BEAD CHOKE	1	
L3026	TSK1032	BEAD CHOKE	1	
L3212	TSK1032	BEAD CHOKE	1	
L3216	J0JGC0000021	CHIP INDUCTOR COIL	1	
L3219	J0JGC0000021	CHIP INDUCTOR COIL	1	
L3700,01	J0JCC0000364	CHIP INDUCTOR	2	
L3707,08	TSK1032	BEAD CHOKE	2	
L4021	J0JHC0000078	CHIP INDUCTOR	1	TH-42PV60H/M/MT
L4023	J0JCC0000077	CHIP INDUCTOR	1	
L4027,28	J0JHC0000078	CHIP INDUCTOR	2	TH-42PV60H/M/MT
L4029	J0JHC0000078	CHIP INDUCTOR	1	
L4031	J0JHC0000078	CHIP INDUCTOR	1	
L4032	J0JHC0000078	CHIP INDUCTOR	1	TH-42PV60H/M/MT
L4033	TALC168T100K	CHIP INDUCTOR COIL	1	TH-42PV60H/M/MT
L4034	J0JCC0000077	CHIP INDUCTOR	1	TH-42PV60H/M/MT
L4037	J0JCC0000077	CHIP INDUCTOR	1	TH-42PV60H/M/MT
L4038	J0JHC0000078	CHIP INDUCTOR	1	
L4040-46	J0JHC0000078	CHIP INDUCTOR	7	
L4048	J0JHC0000078	CHIP INDUCTOR	1	
L4049	J0JBC0000080	CHIP INDUCTOR	1	
L4050,51	J0JHC0000078	CHIP INDUCTOR	2	
L4052	J0JCC0000077	CHIP INDUCTOR	1	
L4053-55	J0JHC0000078	CHIP INDUCTOR	3	
L4056,57	J0JCC0000077	CHIP INDUCTOR	2	
L4060,61	J0JCC0000077	CHIP INDUCTOR	2	
L4065,66	J0JHC0000078	CHIP INDUCTOR	2	
L4068-70	J0JHC0000078	CHIP INDUCTOR	3	
L4071	J0JBC0000080	CHIP INDUCTOR	1	
L4073	J0JHC0000078	CHIP INDUCTOR	1	
L4075,76	J0JHC0000078	CHIP INDUCTOR	2	
L4077	J0JCC0000077	CHIP INDUCTOR	1	
L4078	J0JHC0000078	CHIP INDUCTOR	1	
L5602	TALL08N2R7MA	INDUCTION COIL	1	
L5604	TALL08N2R7MA	INDUCTION COIL	1	
L5605	G0A2R7ZA0021	CHOKE COIL	1	
L5606,07	G0A220GA0002	CHOKE COIL	2	
L5608	G1C100MA0072	INDUCTION COIL	1	
L5609	G0A220GA0002	CHOKE COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5612	TALL08N2R7MA	INDUCTION COIL	1	
L5615	TALL08N150KA	INDUCTION COIL	1	
L5621	G1C330MA0234	INDUCTION COIL	1	
L5622,23	G1C150MA0234	INDUCTION COIL	2	
L5624	G1C330MA0234	INDUCTION COIL	1	
L5651	G0A220GA0002	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L6001-03	G0C1R9KA0147	PEAKING COIL	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6011-13	G0C1R9KA0147	PEAKING COIL	3	
L6061-68	G0ZZ00002183	PEAKING COIL	8	
L6081-88	G0ZZ00002183	PEAKING COIL	8	
L6101,02	J0JJC0000011	CHIP INDUCTOR	2	
L6103	G0ZZ00002183	PEAKING COIL	1	
L6104,05	J0JJC0000011	CHIP INDUCTOR	2	
L6211,12	J0JJC0000011	CHIP INDUCTOR	2	
L6221	G0ZZ00002183	PEAKING COIL	1	
L6241	G0ZZ00002183	PEAKING COIL	1	
L6262	G0ZZ00002183	PEAKING COIL	1	
L6271,72	G0ZZ00002183	PEAKING COIL	2	
L6401-03	G0C1R9KA0147	PEAKING COIL	3	
L6411-13	G0C1R9KA0147	PEAKING COIL	3	
L6461-68	G0ZZ00002183	PEAKING COIL	8	
L6472,73	G0ZZ00002183	PEAKING COIL	2	
L6481-88	G0ZZ00002183	PEAKING COIL	8	
L6591,92	G0ZZ00002183	PEAKING COIL	2	
L6601,02	G0ZZ00002183	PEAKING COIL	2	
L6801,02	J0JJC0000011	CHIP INDUCTOR	2	
L6841	J0JJC0000011	CHIP INDUCTOR	1	
L9500	G1C150KA0038	INDUCTION COIL	1	
L9501,02	J0JHC0000078	CHIP INDUCTOR	2	
L9800	G1C3R0MA0248	INDUCTION COIL	1	
L9801,02	G1C2R2MA0241	INDUCTION COIL	2	
L9810	J0JHC0000045	CHIP INDUCTOR	1	
PA2	K1KA05AA0192	5P CONNECTOR	1	
PA5	K1KA11AA0194	11P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN40A00024	40P CONNECTOR	1	
PA31-34	K1KA03AA0192	3P CONNECTOR	4	
PA40	K1KA20AA0009	20P CONNECTOR	1	
PA2055	K5H1622A0023	FUSE	1	
PA3100	K5H1622A0023	FUSE	1	
PA3104	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
PA9800	K5H4022A0023	FUSE	1	
PC6480	B3PBA0000223	IC	1	
PC6701-03	B3PBA0000233	IC	3	
PC6704	B3PBA0000234	IC	1	
PC6705	B3PBA0000233	IC	1	
PC6760	B3PBA0000223	IC	1	
PC6801	B3PBA0000223	IC	1	
PC6861	B3PBA0000223	IC	1	
PC6871	B3PBA0000223	IC	1	
Q002	2SA207700L	TRANSISTOR	1	
Q1100-03	2SC584500L	TRANSISTOR	4	
Q1108	2SC584500L	TRANSISTOR	1	
Q1109,10	B1CBHD000002	FET	2	
Q1111	2SC584500L	TRANSISTOR	1	
Q1113-16	2SC584500L	TRANSISTOR	4	
Q1130	2SC584500L	TRANSISTOR	1	
Q1131	B1ABCF000138	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q1134	2SC584500L	TRANSISTOR	1	
Q1135	B1ABCF000138	TRANSISTOR	1	
Q1137	2SC584500L	TRANSISTOR	1	
Q1139-43	2SC584500L	TRANSISTOR	5	
Q2001,02	2SC584500L	TRANSISTOR	2	
Q2011	2SA207700L	TRANSISTOR	1	
Q2012	2SC584500L	TRANSISTOR	1	
Q2013	2SA207700L	TRANSISTOR	1	
Q2102-05	2SA207700L	TRANSISTOR	4	
Q2106	2SC584500L	TRANSISTOR	1	
Q2108	2SC584500L	TRANSISTOR	1	
Q2112-14	2SC584500L	TRANSISTOR	3	
Q2300 02	2SA207700L	TRANSISTOR	1	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2301 02	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2303	2SD601A	TRANSISTOR	1	
Q2306,07	2SA207700L	TRANSISTOR	2	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2513	2SD601A	TRANSISTOR	1	
Q3002	2SA207700L	TRANSISTOR	1	
Q3008	2SA207700L	TRANSISTOR	1	
Q3011	2SA207700L	TRANSISTOR	1	
Q3014,15	2SA207700L	TRANSISTOR	2	
Q3017	2SA207700L	TRANSISTOR	1	
Q3204-07	2SC584500L	TRANSISTOR	4	
Q3210	2SA207700L	TRANSISTOR	1	
Q3331-33	2SC2480	TRANSISTOR	3	
Q4043,44	2SA207700L	TRANSISTOR	2	TH-42PV60H/M/MT
Q4046	2SA207700L	TRANSISTOR	1	TH-42PV60H/M/MT
Q4050	2SC584500L	TRANSISTOR	1	
Q4051,52	2SD1030	TRANSISTOR	2	TH-42PV60H/M/MT
Q4053	2SC584500L	TRANSISTOR	1	
Q4054	2SD1030	TRANSISTOR	1	
Q4055-59	2SA207700L	TRANSISTOR	5	
Q4061-69	2SC584500L	TRANSISTOR	9	
Q4070,71	B1MBACA00008	TRANSISTOR	2	
Q4082,83	2SK1228	FET	2	
Q4918	B1ABCF000138	TRANSISTOR	1	
Q4919	2SC584500L	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SD601A	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,05	2SD601A	TRANSISTOR	2	
Q5610	2SD601A	TRANSISTOR	1	
Q5613	2SD601A	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SD601A	TRANSISTOR	1	
Q6001-03	B1JADN000001	TRANSISTOR	3	
Q6021-23	B1JADN000001	TRANSISTOR	3	
Q6041,42	B1JADN000002	TRANSISTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6051,52	B1JADN000002	TRANSISTOR	2	
Q6101-04	B1DFKM000002	TRANSISTOR	4	
Q6105	B1ABNF000006	TRANSISTOR	1	
Q6106	B1ADNF000006	TRANSISTOR	1	
Q6111	2SK326800L	FET	1	
Q6112	B1DFKM000002	TRANSISTOR	1	
Q6114	B1DFKM000002	TRANSISTOR	1	
Q6141	B1ABNF000006	TRANSISTOR	1	
Q6142	B1ADNF000006	TRANSISTOR	1	
Q6146	B1ABNF000006	TRANSISTOR	1	
Q6147	B1ADNF000006	TRANSISTOR	1	
Q6171	2SD2185	TRANSISTOR	1	
Q6172	B1ADRD000001	TRANSISTOR	1	
Q6181	2SD2185	TRANSISTOR	1	
Q6182	B1ADRD000001	TRANSISTOR	1	
Q6221	2SD1263A	TRANSISTOR	1	
Q6222	2SC3063	TRANSISTOR	1	
Q6251	2SD601A	TRANSISTOR	1	
Q6401-03	B1JADN000001	TRANSISTOR	3	
Q6421-23	B1JAEP000001	TRANSISTOR	3	
Q6441,42	B1JADN000002	TRANSISTOR	2	
Q6451,52	B1JADP000002	TRANSISTOR	2	
Q6471	B1CHGD000006	TRANSISTOR	1	
Q6511	B1ABNF000006	TRANSISTOR	1	
Q6512	B1ADNF000006	TRANSISTOR	1	
Q6516	B1ABNF000006	TRANSISTOR	1	
Q6517	B1ADNF000006	TRANSISTOR	1	
Q6531	2SD2185	TRANSISTOR	1	
Q6532	B1ADRD000001	TRANSISTOR	1	
Q6551	2SD2185	TRANSISTOR	1	
Q6552	B1ADRD000001	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6601	B1DFES000003	TRANSISTOR	1	
Q6602	2SD601A	TRANSISTOR	1	
Q6621,22	B1DFKM000001	TRANSISTOR	2	
Q6641,42	B1DFKM000001	TRANSISTOR	2	
Q6644,45	B1DFKM000001	TRANSISTOR	2	
Q6647,48	B1DFKM000001	TRANSISTOR	2	
Q6661	B1DEET000002	TRANSISTOR	1	
Q6662	2SD601A	TRANSISTOR	1	
Q6663	2SD2185	TRANSISTOR	1	
Q6671,72	B1DFET000001	TRANSISTOR	2	
Q6680	B1ADNF000006	TRANSISTOR	1	
Q6681,82	2SK389500L	FET	2	
Q6691	2SK620	FET	1	
Q6742,43	2SD601A	TRANSISTOR	2	
Q6744	2SK620	FET	1	
Q6762	B1ADNF000006	TRANSISTOR	1	
Q6781	B1ABNF000006	TRANSISTOR	1	
Q6782	B1ADNF000006	TRANSISTOR	1	
Q6791	2SD601A	TRANSISTOR	1	
Q6801	B1BAEJ000014	TRANSISTOR	1	
Q6802	2SB0709A	TRANSISTOR	1	
Q6803	2SD814A	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6804	2SD601A	TRANSISTOR	1	
Q6821	2SD1263A	TRANSISTOR	1	
Q6822	2SC3063	TRANSISTOR	1	
Q6824	2SD601A	TRANSISTOR	1	
Q6841	2SD1263A	TRANSISTOR	1	
Q6842	2SC1473A	TRANSISTOR	1	
Q9010	2SD601A	TRANSISTOR	1	
Q9044	2SD601A	TRANSISTOR	1	
Q9046	2SD601A	TRANSISTOR	1	
Q9049	2SB709A	TRANSISTOR	1	
Q9050-54	2SD601A	TRANSISTOR	5	
Q9055-58	B1CBHD000002	FET	4	
Q9300-02	2SD601A	TRANSISTOR	3	
Q9500	B1CBHD000002	FET	1	
Q9800,01	B1MBEDA00015	TRANSISTOR	2	
Q9803	B1MBEDA00015	TRANSISTOR	1	
Q9805,06	2SD601A	TRANSISTOR	2	
R001	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	TH-42PV60H/M/MT
R005	ERJ3GEYJ561	M 560 OHM, J, 1/16W	1	TH-42PV60H/M/MT
R005	ERJ3EKF5600	M 560 OHM, 1/16W	1	TH-42PV60A
R008	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R009	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R011	ERJ6GEYJ271	M 270 OHM, J, 1/10W	1	
R012,13	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	TH-42PV60H/M/MT
R014	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R016	ERJ6GEYJ271	M 270 OHM, J, 1/10W	1	TH-42PV60H/M/MT
R017,18	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R019,20	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	TH-42PV60H/M/MT
R019,20	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-42PV60A
R021	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	TH-42PV60H/M/MT
R022	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R023	ERJ3EKF4700	M 470 OHM, 1/16W	1	TH-42PV60A
R023,24	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-42PV60H/M/MT
R025	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R026	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R027	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	TH-42PV60H/M/MT
R028	ERJ3EKF3602	M 36KOHM, 1/16W	1	TH-42PV60H/M/MT
R028	ERJ3EKF3602	M 36KOHM, 1/16W	1	TH-42PV60A
R029	ERJ3EKF6802	M 68KOHM, 1/16W	1	TH-42PV60A
R029,30	ERJ3EKF6802	M 68KOHM, 1/16W	2	
R031	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R1101	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R1102,03	ERJ2GEJ102	M 1KOHM, J, 0.063W	2	
R1105,06	ERJ2GEJ102	M 1KOHM, J, 0.063W	2	
R1108-12	ERJ2GEJ101	M 100 OHM, J, 0.063W	5	
R1113	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
R1114	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R1116	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
R1117	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R1118,19	EXB2HV680J	RESISTOR ARRAY	2	
R1121,22	ERJ2GEJ220	M 22 OHM, J, 0.063W	2	
R1123	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R1124,25	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1128	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-42PV60H/M/MT
R1129	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-42PV60A
R1130	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1131,32	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1133,34	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R1135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1140,41	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
R1146	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1147,48	D1HG5608A002	NETWORK RESISTOR	2	
R1149	EXB2HV680J	RESISTOR ARRAY	1	
R1151	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1152	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1153	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1154,55	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R1156	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1157	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1158	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1159	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1160	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1162	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1164	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1165	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1168,69	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1174	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1175	ERJ2GEJ563	M 56KOHM ,J,0.063W	1	
R1176	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1177-79	ERJ2GEJ101	M 100 OHM, J,0.063W	3	
R1181	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1182	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
R1183	EXB28V680JX	RESISTOR ARRAY	1	
R1184	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1186	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-42PV60A
R1187	EXB2HV680J	RESISTOR ARRAY	1	
R1188,89	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R1191	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-42PV60A
R1193,94	ERJ2GEJ101	M 100 OHM, J,0.063W	2	TH-42PV60H/M/MT
R1197	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-42PV60A
R1199	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1200	EXB2HV680J	RESISTOR ARRAY	1	
R1203	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1207	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1212	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1213	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R1214	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1215-17	ERJ2GEJ101	M 100 OHM, J,0.063W	3	
R1218	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R1220	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R1221	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R1222	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R1223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1224	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1225,26	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1228	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R1229	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1230	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R1231	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1232,33	ERJ2GEJ332	M 3.3KOHM, J,0.063W	2	
R1234	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1235,36	ERJ2GEJ272	M 2.7KOHM, J,0.063W	2	
R1238	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1239	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R1240	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1241	ERJ2GEJ822	M 8.2KOHM, J,0.063W	1	
R1243	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1246	ERJ2GEJ912	M 9.1KOHM, J,0.063W	1	
R1249	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1250	ERJ2GEJ224	M 220KOHM, J,0.063W	1	
R1251,52	EXB2HV101J	RESISTOR ARRAY	2	
R1254	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R1256	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1263,64	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1269	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1270,71	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1275	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R1279,80	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1281	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1282	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1283	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1284	ERJ2GEJ682	M 6.8KOHM, J,0.063W	1	
R1290	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R1298-02	ERJ2GE0R00	M 0.0 OHM, J,0.063W	5	
R1307	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1308	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1309-12	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R1313,14	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R1315	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R1316	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1318,19	ERJ2GEJ512X	M5.12KOHM, J,0.063W	2	
R1321	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1322	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
R1323,24	ERJ2GEJ823	M 82KOHM, J,0.063W	2	
R1325,26	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1327,28	ERJ2GEJ683	M 68KOHM, J,0.063W	2	
R1329,30	ERJ2GEJ473	M 47KOHM,J,0.063W	2	
R1331,32	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1333	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1340	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1344	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1346	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-42PV60A
R1348	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-42PV60H/M/MT
R1351	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1352	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1354	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1363	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1367	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R1368	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R1369	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1372	ERJ2GEJ473	M 47KOHM,J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1375	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1376	ERJ2GEJ273	M 27KOHM, J,0.063W	1	
R1377	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R1379	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
R1382,83	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1384	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1389	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1408	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1410	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1411	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R1412,13	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1414	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1426-32	ERJ8GEY0R00	M 0 OHM, 1/8W	7	
R1436,37	ERJ2GEJ561	M 60 OHM, J,0.063W	2	
R1439	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1441	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1446,47	ERJ2GEJ471	M 470 OHM, J,0.063W	2	
R1448	ERJ2GEJ473	M 47KOHM, J,0.063W	1	TH-42PV60A
R1449	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R1451,52	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R1454	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1458,59	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1461,62	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1466	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1467	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R1470	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1472,73	ERJ2GEJ301	M 300 OHM, J,0.063W	2	
R1474	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R1475	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1478	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R1479,80	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R1490	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60A
R1491	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R1526	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1530,31	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1554,55	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1556	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
R2005	ERJ3GEYJ104	M 100KOHM, J,1/16W	1	
R2006-11	ERJ6GEYJ223	M 22KOHM, J,1/10W	6	
R2012	ERJ3GEYJ104	M 100KOHM, J,1/16W	1	
R2013,14	ERJ3GEYJ222	M 2.2KOHM, J,1/16W	2	
R2015,16	ERJ3GEYJ331	M 330 OHM, J,1/16W	2	
R2042	ERJ3GEYJ105	M 1MOHM, J,1/16W	1	
R2043	ERJ3GEYJ473	M 47KOHM, J,1/16W	1	
R2044	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R2045,46	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R2048	ERJ6GEYJ471	M 470 OHM, J,1/10W	1	
R2049,50	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R2051,52	ERJ6GEYJ184	M 180KOHM, J,1/10W	2	
R2053	ERJ6GEYJ471	M 470 OHM, J,1/10W	1	
R2054	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R2113,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2116	J0JCC0000241	CHIP INDUCTOR	1	
R2124,25	ERJ3GEYJ101	M 100 OHM, J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2126,27	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2128,29	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R2130	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2131	ERJ3EKF8201	M 8.2KOHM, 1/16W	1	
R2132	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2133	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2137	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2138	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2147	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2148,49	ERJ3EKF6342	M6.34KOHM, 1/16W	2	
R2152	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2153	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2154	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2155,56	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2158	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2160	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2162	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2164	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2165,66	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R2167	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2168,69	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2170-73	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2176,77	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2181	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2182,83	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R2184-87	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2188	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2192,93	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2195,96	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2197	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2202	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R2203	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2204	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R2208	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2209	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2210	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R2211	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2213	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2214	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2215	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2219	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2220	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R2224,25	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2227	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2228	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R2229	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2230,31	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2232,33	ERJ3GEYJ153	M 15KOHM,J,1/16W	2	
R2234-37	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R2238,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2302	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2306	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2310	ERJ3GEY0R00	M 0 OHM, 1/16W	1	(PA)
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	(H)
R2311	ERJ3GEY0R00	M 0 OHM, 1/16W	1	(PA)
R2311	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	(H)
R2312	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2323,24	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2325	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2329	ERJ3EKF1003	M 100KOHM, 1/16W	1	
R2332	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2341	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2349	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R2354	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2357	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2359	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2360	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2361	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2363	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2364	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2365	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R2366	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2368	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2369	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R2372,73	ERJ6GEYJ681	M 680 OHM,J,1/10W	2	
R2375	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R2376	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2379,80	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R2383	ERJ3EKF3301	M 3.3KOHM, 1/16W	1	
R2384	ERJ3EKF1151	M1.15KOHM, 1/16W	1	
R2387	ERJ3EKF1151	M1.15KOHM, 1/16W	1	
R2388	ERJ3EKF3301	M 3.3KOHM, 1/16W	1	(PA)
R2388,89	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	(H)
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2396	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2397	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	(H)
R2397	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(PA)
R2398	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	(H)
R2398	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(PA)
R2399	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2400	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2401,02	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2403	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2404,05	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2406	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2407	ERJ3EKF1241	M1.24KOHM, 1/16W	1	
R2408	ERJ3EKF1071	M1.07KOHM, 1/16W	1	
R2409	ERJ3EKF1621	M1.62KOHM, 1/16W	1	
R2410	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2421	ERJ3EKF1621	M1.62KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2422	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2512	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R2521	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2525	ERJ3EKF5760	M 576 OHM, 1/16W	1	
R2530	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2531	ERJ3EKF2700	M 270 OHM, 1/16W	1	
R2542	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2556,57	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R2558	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3001-10	ERJ6ENF75R0	M 75 OHM, 1/10W	10	
R3011	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3012	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3020	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R3021,22	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3027	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3039	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3044,45	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3048	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R3049	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3050	ERJ3GEYJ242	M 2.4KOHM,J,1/16W	1	
R3051	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3057,58	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3059,60	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3061	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3062-64	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3068	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3070	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3072-75	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R3076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3080	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3087	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3089,90	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3092	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3094,95	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R3096	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3097	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3099-01	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3102	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3111-14	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3115	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3118	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3119,20	ERJ3EKF91R0	M 91 OHM, 1/16W	2	
R3121	ERJ3EKF1300V	M 130 OHM, 1/16W	1	
R3122	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3123	ERJ3EKF1300V	M 130 OHM, 1/16W	1	
R3125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3126	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3127	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3134	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3135	ERJ3EKF91R0	M 91 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3138	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3139	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3140	ERJ3EKF1300V	M 130 OHM, 1/16W	1	
R3141	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3160,61	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3167	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3174-76	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R3206	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3213,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3215	J0JCC0000241	CHIP INDUCTOR	1	
R3219	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3222	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3227-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R3233,34	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3238	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3239-42	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R3250,51	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3253	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3254	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3255	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R3256	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3259	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3261-64	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3266,67	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3278,79	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3281	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3283,84	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3286	J0JCC0000241	CHIP INDUCTOR	1	
R3290-93	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	4	
R3302	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3305	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3306,07	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3308,09	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3310	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3312	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3313	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3317	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3318	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3320	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3323,24	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3330	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3336	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3337	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3338	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3339	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3340	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3341	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3342	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3343	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3344	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3345	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3346	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3347	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3348,49	ERJ3GEYJ680	M 68 OHM, J, 1/16W	2	
R3350-52	ERJ3GEYJ510	M 51 OHM, J, 1/16W	3	
R3353	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R3354	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R3408,09	ERJ3GEYJ361	M 360 OHM, J, 1/16W	2	
R3704	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3709-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R3714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3716,17	ERJ6GEYJ184	M 180KOHM, J, 1/10W	2	
R3721	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R3732	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3733	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3736-41	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3746	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3748	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3750	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3751	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R3753	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3754	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3755	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3757	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R3759-64	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
R3765	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3767	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3768	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4001	ERJ3EKF1211	M1.21KOHM, 1/16W	1	
R4004	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4008	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4010	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4018	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R4019	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	TH-42PV60A
R4021	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4022	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R4024,25	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R4026,27	ERJ2GEJ102	M 1KOHM, J, 0.063W	2	
R4029	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
R4031-33	ERJ2GEJ103	M 10KOHM, J, 0.063W	3	
R4037-39	D1HG1038A002	NETWORK RESISTER	3	
R4040,41	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R4045,46	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4257	ERJ3EKF3302	M 33KOHM, 1/16W	1	
R4265	ERJ3EKF3242	M32.4KOHM, 1/16W	1	
R4269	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4271,72	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R4286,87	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R4293	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R4338-43	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	6	
R4434	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	TH-42PV60H/M/MT
R4436	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	TH-42PV60H/M/MT
R4438	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	TH-42PV60H/M/MT
R4442,43	ERJ3EKF4220	M 422 OHM, 1/10W	2	TH-42PV60H/M/MT
R4444,45	ERJ3EKF3301	M 3.3KOHM, 1/16W	2	TH-42PV60H/M/MT
R4447	ERJ3EKF7680	M 768 OHM, 1/16W	1	TH-42PV60H/M/MT

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4449	ERJ3EKF1211	M1.21KOHM, 1/16W	1	TH-42PV60H/M/MT
R4450,51	ERJ6GEYJ821	M 820 OHM,J,1/10W	2	TH-42PV60H/M/MT
R4454	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	TH-42PV60H/M/MT
R4457	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4465	ERJ2GEJ224	M 220KOHM, J,0.063W	1	
R4466,67	ERJ2GEJ330	M 33 OHM, J,0.063W	2	TH-42PV60H/M/MT
R4469,70	ERJ3EKF1500	M 150 OHM, 1/16W	2	
R4474	ERJ3EKF1211	M1.21KOHM, 1/16W	1	
R4476	ERJ2GEJ330	M 33 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4477,78	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	TH-42PV60H/M/MT
R4479,80	ERJ3EKF4220	M 422 OHM, 1/10W	2	
R4481	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4482,83	ERJ3EKF1781	M1.78KOHM, 1/16W	2	
R4484,85	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-42PV60H/M/MT
R4486	ERJ3EKF4870	M 487 OHM, 1/16W	1	
R4487	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4488	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4489	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	TH-42PV60H/M/MT
R4490	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4491	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4492	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4495	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4496-99	ERJ6GEYJ102	M 1KOHM,J,1/10W	4	
R4500	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4501,02	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R4503	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4507,08	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4514-16	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	TH-42PV60H/M/MT
R4517	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4519	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4520	ERJ3EKF1691	M1.69KOHM, 1/16W	1	
R4521,22	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4523-25	ERJ3EKF33R0	M 33 OHM, 1/16W	3	TH-42PV60H/M/MT
R4526	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	TH-42PV60H/M/MT
R4527	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4528-30	ERJ3EKF33R0	M 33 OHM, 1/16W	3	TH-42PV60H/M/MT
R4531	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	TH-42PV60H/M/MT
R4532	ERJ3EKF4700	M 470 OHM, 1/16W	1	TH-42PV60H/M/MT
R4533	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4534,35	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R4536-38	ERJ3EKF1500	M 150 OHM, 1/16W	3	TH-42PV60H/M/MT
R4539	ERJ3EKF1001	M 1KOHM, 1/16W	1	TH-42PV60H/M/MT
R4541	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4543	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4544	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4545-47	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	TH-42PV60H/M/MT
R4548	ERJ2GEJ911X	M 910 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4549	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4550	EXB28V220J	RESISTOR ARRAY	1	
R4551	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4552	EXB28V220J	RESISTOR ARRAY	1	
R4553	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4554	ERJ2GEJ220	M 22 OHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4555	EXB28V220J	RESISTOR ARRAY	1	
R4556,57	ERJ2GEJ220	M 22 OHM, J,0.063W	2	TH-42PV60H/M/MT
R4560,61	EXB28V220J	RESISTOR ARRAY	2	
R4562	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4563-65	ERJ2GEJ220	M 22 OHM, J,0.063W	3	
R4566	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4567	ERJ2GEJ470	M 47 OHM, J,0.063W	1	TH-42PV60H/M/MT
R4568	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R4569	D1HG5608A002	NETWORK RESISTER	1	TH-42PV60H/M/MT
R4570,71	EXB28V560JX	RESISTOR ARRAY	2	TH-42PV60H/M/MT
R4572	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4575	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4577-79	ERJ2GEJ222	M 2.2KOHM, J,0.063W	3	
R4583,84	ERJ2GEJ390	M 39 OHM, J,0.063W	2	
R4589-04	ERJ2GEJ2R7X	M 2.7OHM, J,0.063W	16	
R4605,06	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R4607	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4609,10	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R4612,13	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R4617,18	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R4619	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R4620	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4621	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R4622	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4624	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4626	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4629-32	ERJ2GEJ472	M 4.7KOHM, J,0.063W	4	
R4633,34	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4636	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4637	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4639	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4640	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4641	EXB28V330J	RESISTOR ARRAY	1	
R4642-45	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R4647	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4648	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4655	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4657	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
R4658	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4660	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4661	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4662	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4665	EXB2HV220JV	RESISTOR ARRAY	1	
R4667	EXB2HV220JV	RESISTOR ARRAY	1	
R4668	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R4669	EXB2HV220JV	RESISTOR ARRAY	1	
R4672,73	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R4675	ERJ3EKF1802	M 18KOHM, 1/16W	1	
R4677	ERJ3EKF1802	M 18KOHM, 1/16W	1	
R4679,80	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4681,82	ERJ3EKF3302	M 33KOHM, 1/16W	2	
R4701	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R4706	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4708,09	ERJ2GEJ680	M 68 OHM, J,0.063W	2	TH-42PV60A
R4710	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4711	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4712	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4713,14	EXB2HV221JV	RESISTOR ARRAY	2	
R4715	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4718-20	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
R4727	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4729,30	ERJ3EKF1000	M 100 OHM, 1/16W	2	
R4731	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4732	ERJ3EKF4751	M4.75KOHM, 1/16W	1	
R4733	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
R4735	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4738,39	ERJ2GEJ332	M 3.3KOHM, J,0.063W	2	
R4743-47	ERJ2GEJ680	M 68 OHM, J,0.063W	5	
R4749,50	EXB2HV680J	RESISTOR ARRAY	2	
R4751-54	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R4756-60	ERJ2GEJ680	M 68 OHM, J,0.063W	5	
R4762	EXB2HV680J	RESISTOR ARRAY	1	
R4763-65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R4772	EXB2HV470JV	RESISTOR ARRAY	1	
R4773	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4774	EXB2HV470JV	RESISTOR ARRAY	1	
R4775	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4776	EXB2HV470JV	RESISTOR ARRAY	1	
R4777	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4778	EXB2HV470JV	RESISTOR ARRAY	1	
R4779	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4782	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4783	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4784	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4785	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4788	EXB2HV470JV	RESISTOR ARRAY	1	
R4791,92	ERJ2GEJ470	M 47 OHM, J,0.063W	2	
R4793,94	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4796	EXB2HV470JV	RESISTOR ARRAY	1	
R4804	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R4805,06	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R4807-11	ERJ2GE0R00	M 0.0 OHM, J,0.063W	5	
R4814	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4816,17	ERJ2GEJ223	M 22KOHM, J,0.063W	2	
R4819	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R4822	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4823-25	J0JAD0000025	CHIP INDUCTOR	3	
R4837	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4838	ERJ2GEJ112	M 1.1KOHM, J,0.063W	1	
R4891	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4960	EXB2HV680J	RESISTOR ARRAY	1	
R4961-63	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
R4964	EXB2HV680J	RESISTOR ARRAY	1	
R4965,66	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
R4967	EXB2HV680J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4968-72	ERJ2GEJ680	M 68 OHM, J,0.063W	5	
R5601	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R5603	ERJ3EKF1542	M15.4KOHM, 1/16W	1	
R5605	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5606	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5607	ERJ3EKF4531	M4.53KOHM, 1/16W	1	
R5609	ERJ3EKF2000	M 200 OHM, 1/16W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R5615	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R5617	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5619	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R5620	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5621	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5625-27	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R5632	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5633	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5634	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5635	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5637,38	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R5639	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5640	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5641	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5642	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5643	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5644	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5645	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R5646	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R5647	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5648	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R5649	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R5650	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5653,54	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R5659	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R5660	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5662	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5664	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5665	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R5667-69	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R5672	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5676	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5692	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5693	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R5694	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R5695	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5801	ERJ3EKF8450	M 845 OHM, 1/16W	1	
R5802	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R5803	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R5804	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5805-08	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	4	
R5809	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5822-24	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R5826	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R5836	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R6001-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6020	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6021	ERJ14YJ150U	M 15 OHM, J,1/4W	1	
R6022	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6023-27	ERJ14YJ150U	M 15 OHM, J,1/4W	5	
R6031,32	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6041-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6051-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6061,62	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6101-08	ERJ6GEYJ101	M 100 OHM,J,1/10W	8	
R6109	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6110	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6111,12	ERJ6GEYJ470	M 47 OHM,J,1/10W	2	
R6113	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6114	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6116	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6131,32	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6133,34	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6135,36	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6141,42	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6146,47	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6151,52	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6153,54	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6155,56	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6157-60	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	4	
R6171	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6172,73	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6181	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6182,83	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6191-94	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R6195,96	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6213	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6214	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6222	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6223	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6225	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
R6226,27	ERJ6GEYJ163	M 16KOHM,J,1/10W	2	
R6228	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6229	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R6231	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6232	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6241	EXB38V470J	RESISTOR ARRAY	1	
R6242	EXB38V472J	RESISTOR ARRAY	1	
R6243	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6244	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6245	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6246	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6251	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6252,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6254	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6257	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6258	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6261	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6401-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6421-26	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6441-44	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6451-54	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6467,68	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6471	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6472	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6473	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R6474	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6475,76	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6477	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6478	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6501,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6503	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6504,05	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6506	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6507-09	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	3	
R6511,12	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6516,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6521,22	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6523,24	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6525,26	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6531	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6532,33	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6551	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6552,53	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6561-64	EXB38V470J	RESISTOR ARRAY	4	
R6565-68	EXB38V472J	RESISTOR ARRAY	4	
R6581	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6584	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6586	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	
R6587	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6588	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6591	EXB38V472J	RESISTOR ARRAY	1	
R6592	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6603	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6604	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6605	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6606	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6607	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6608,09	D0GF102JA047	M 1.0 KOHM,J,0.33W	2	
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6611	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6612	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6613	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6620	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6621,22	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6641,42	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6644,45	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6647,48	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6658	D0D1101JA009	M 100 OHM,J,1W	1	
R6659,60	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6661	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6662	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6663	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6664	D0GF222JA047	M 2.2 KOHM,J,0.33W	1	
R6665	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R6666	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6667,68	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6671	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6673,74	D0GD5R6JA059	M 5.6 OHM,J,0.25W	2	
R6682	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6683	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6684	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6685	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6687	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6688	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6689	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6690	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6691	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6696,97	D0D32R2JA020	M 2.2 OHM,J,5W	2	
R6700-08	ERJ6GEYJ471	M 470 OHM,J,1/10W	9	
R6710-18	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
R6721,22	EXB38V220J	RESISTOR ARRAY	2	
R6723	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6724	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6742	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6743	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6744	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6745	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6746,47	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756-58	D0GD101JA059	M 100 OHM,J,0.25W	3	
R6759	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6760	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6761	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6762	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6775,76	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6777	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6781	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6782	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6791	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6792	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6793	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6801,02	ERX1FJSR22D	M0.22 OHM, J, 1W	2	
R6806	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6807	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6808	ERG3FJS560D	M 56 OHM, J, 3W	1	
R6809	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6810,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R6812	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6813	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6814	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6815	ERG2FJS183D	M 18KOHM, J, 2W	1	
R6816	ERJ6ENF1582	M15.8KOHM, 1/10W	1	
R6817	ERJ6ENF2701	M 2.7KOHM, 1/10W	1	
R6821	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6822	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6823	ERG1FJS104D	M 100KOHM, J, 1W	1	
R6824	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6825,26	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R6827	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6828	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6829,30	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6831	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R6833-35	ERJ6ENF5602	M 56KOHM, 1/10W	3	
R6836	ERJ6ENF6802	M 68KOHM, 1/10W	1	
R6837	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R6839	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6841	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6842	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6843	ERJ6GEYJ513	M 51KOHM,J,1/10W	1	
R6844	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6845	ERJ6GEYJ513	M 51KOHM,J,1/10W	1	
R6846,47	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R6848	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6849,50	ERJ6ENF6802	M 68KOHM, 1/10W	2	
R6851	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6852	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6853	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6860	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6861	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R6862,63	ERJ6ENF4702	M 47KOHM, 1/10W	2	
R6864	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6865,66	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6867	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6868	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6869	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6871-73	ERJ6ENF3902	M 39KOHM, 1/10W	3	
R6874	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6875	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R6876	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6877	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6878	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6879	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886-88	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6901	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6902-04	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R6905	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6909	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6913	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6917	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6924	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6931-34	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6935,36	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R6951	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6952-54	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R6955	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6959	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6963	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6967	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6971	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6981-84	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6985,86	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R7112	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7113,14	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7115	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7116	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7118,19	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R7120	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7122-25	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7126	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7127,28	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7132-37	EXB38V470J	RESISTOR ARRAY	6	
R7139,40	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7142-45	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7146	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7149	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7151-54	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7155	EXB38V102J	RESISTOR ARRAY	1	
R7156	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7158,59	EXB38V470J	RESISTOR ARRAY	2	
R7162-67	EXB38V102J	RESISTOR ARRAY	6	
R7169	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7171-74	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7175	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7177	EXB38V102J	RESISTOR ARRAY	1	
R7179,80	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7186,87	EXB38V470J	RESISTOR ARRAY	2	
R7201-07	EXB38V470J	RESISTOR ARRAY	7	
R7208-10	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7212-15	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7216	EXB38V470J	RESISTOR ARRAY	1	
R7217	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7219	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7221	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7223-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7227	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7229	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7231	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7232-35	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7236	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7237-42	EXB38V102J	RESISTOR ARRAY	6	
R7245	EXB38V102J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7246-49	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7250,51	EXB38V470J	RESISTOR ARRAY	2	
R7256,57	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7258	EXB38V102J	RESISTOR ARRAY	1	
R7260	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7262-65	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7266	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7269	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7270	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7271	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9060-67	ERJ3GEYJ101	M 100 OHM,J,1/16W	8	
R9074	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9076	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9096	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9098	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9099	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9100,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9102	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9105	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9106	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9108,09	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9110,11	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9113	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9120	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9121	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9127	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9129	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R9134	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R9140	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9141-45	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9148	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9149	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9150,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9152,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9154,55	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9156-59	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9160,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9164-66	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9167,68	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9169	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9170-72	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9173-75	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9178	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9179	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9180	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9181-84	ERJ3GEYJ101	M 100 OHM,J,1/16W	4	
R9185,86	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9187,88	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9189,90	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9192	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9193	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9194	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9196	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9199	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9203	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9205	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9206,07	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9215	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R9217-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9223	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9225	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9232	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9236	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9237	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9240	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9317	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R9348	D1HG8208A002	NETWORK RESISTER	1	
R9349	EXB38V820J	RESISTOR ARRAY	1	
R9350,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9352	EXB38V820J	RESISTOR ARRAY	1	
R9353,54	D1HG8208A002	NETWORK RESISTER	2	
R9355,56	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9357-59	D1HG8208A002	NETWORK RESISTER	3	
R9360	EXB38V820J	RESISTOR ARRAY	1	
R9361,62	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9363	EXB2HV470JV	RESISTOR ARRAY	1	
R9366	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9367	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9368	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9369	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9370	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9371	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9379	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9380	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9382	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9390	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9391	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9394	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9395	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9501	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9503	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9506	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9507	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9511-13	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9514	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9516	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9518	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
R9522-25	ERJ3GEYJ103	M 10KOHM,J,1/16W	4	
R9527,28	EXB2HV272JV	RESISTOR ARRAY	2	
R9529,30	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9531-33	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9534	EXB38V470J	RESISTOR ARRAY	1	
R9535,36	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9537	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9539	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9543,44	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9545	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9548-50	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9552	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9555	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9800	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R9801	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9802	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R9803	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9804	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9805	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R9806	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9810	ERJ3EKF3001	M 3KOHM, 1/16W	1	
R9813	ERJ3EKF2401	M 2.4KOHM, 1/16W	1	
R9814	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R9815	ERJ3EKF2202	M 22KOHM, 1/16W	1	
R9816	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R9821	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9823-27	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9828	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9830,31	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9838,39	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9840	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9842-44	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R9845	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9846,47	EXB2HV272JV	RESISTOR ARRAY	2	
R9848,49	EXB2HV470JV	RESISTOR ARRAY	2	
R9850	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9854	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9859	EXB38V101J	RESISTOR ARRAY	1	
R9861-63	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9864,65	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9868	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9869-71	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9872	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9878	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9879	ERJ3EKF2002	M 20KOHM, 1/16W	1	
R9880	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9884	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9891	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R9892	ERJ3EKF1502	M 15KOHM, 1/16W	1	
R9893	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9897	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9903	EXB2HV470JV	RESISTOR ARRAY	1	
R9904	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9905	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9906	EXB38V470J	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9917,18	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9919,20	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9922	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9929	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9936-39	ERJ3EKF1001	M 1KOHM, 1/16W	4	
R9940	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9941,42	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9943-51	EXB38V470J	RESISTOR ARRAY	9	
R9952-55	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R9956	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RTL	TNPA3756CS	CIRCUIT BOARD DG	1	TH-42PV60H/M/MT 
RTL	TNPA3756CP	CIRCUIT BOARD DG	1	TH-42PV60A 
RTL	TNPA3760AD	CIRCUIT BOARD H	1	
RTL	TNPA3768AB	CIRCUIT BOARD TA	1	TH-42PV60H/M/MT 
RTL	TNPA3768AC	CIRCUIT BOARD TA	1	TH-42PV60A 
RTL	TNPA3852	CIRCUIT BOARD HC	1	
RTL	TNPA3761AC	CIRCUIT BOARD PA	1	
RTL	TNPA3812	CIRCUIT BOARD C1	1	
RTL	TNPA3813	CIRCUIT BOARD C2	1	
RTL	TZTNP01BJTB	CIRCUIT BOARD D	1	
RTL	TNPA3911	CIRCUIT BOARD P	1	
RTL	TNPA3814	CIRCUIT BOARD SC	1	
RTL	TNPA3819	CIRCUIT BOARD SD	1	
RTL	TNPA3815	CIRCUIT BOARD SS	1	
RTL	TNPA3818	CIRCUIT BOARD SU	1	
RTL	TNPA3764AF	CIRCUIT BOARD G	1	
RTL	TNPA3848AD	CIRCUIT BOARD GK	1	
RTL	TNPA3762AE	CIRCUIT BOARD K	1	
RTL	TNPA3763AC	CIRCUIT BOARD S	1	
S1	K1KA03BA0061	3P CONNECTOR	1	
SC2	K1KA02A00626	2P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC30	K1KA08AA0192	8P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00239	9P CONNECTOR	2	
SD1-D4	K1MN96B00005	96P CONNECTOR	4	
SD46	K1KB09A00045	9P CONNECTOR	1	
SS11	K1KA02A00626	2P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
SS23	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS41-44	K1MN13B00020	13P CONNECTOR	4	
SU1-U4	K1MN96B00005	96P CONNECTOR	4	

001-04	XXXXXXXXXXXX	001-00000000	7	
--------	--------------	--------------	---	--

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
SW3753-57	EVQ11G05R	SWITCH	5	
T6602	ETS25AZ139AD	SWITCHING TRANS	1	
TA5,A6	K1KB15B00013	15P CONNECTOR	2	
TU001	ENG9301GF	TUNER	1	TH-42PV60H/M/MT 
TU001	ENG37A12GF	TUNER	1	TH-42PV60A 
TU002	ENG39A01GF	TUNER	1	TH-42PV60H/M/MT 
VR6000	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6600	EVMEASA00B13	CONTROL 1KOHMB 0.3W	1	
VR6602	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
X1100	H0J100500030	CRYSTAL	1	
X1101	H0J327200114	CRYSTAL	1	
X2101	H0J184500027	CRYSTAL	1	
X4004	H0J270500087	CRYSTAL	1	
X4006	H0J202500016	CRYSTAL	1	TH-42PV60H/M/MT
X9000	H2D200500011	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
ZA2101-08	TESA169	SHIELD CLIP	8	
ZA2300,01	K4CZ01000027	COMPATIBLE WITH JALCO K9	2	
ZA3401-03	K4CZ01000027	COMPATIBLE WITH JALCO K9	3	
ZA3405	K4CZ01000027	COMPATIBLE WITH JALCO K9	1	
ZA3701	K4CD01000013	TERMINAL	1	
ZA4001,02	K4CD08000002	TERMINAL	2	
ZA6001,02	K4CD01000011	TERMINAL	2	
ZA6005	K4CD01000011	TERMINAL	1	
ZA6401-03	K4CD01000011	TERMINAL	3	
ZA7101-04	K4CD01000013	TERMINAL	4	
ZA7201-04	K4CD01000013	TERMINAL	4	
ZA9001	K4CD01000011	TERMINAL	1	
C402	F1J1C1050011	C 1UF, Z, 50V	1	
C404	F0CAF105A021	C 1UF, 250V	1	
C407	EEUEB2W220B	E 22UF, 450V	1	
C408	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C409	F0CAF225A021	C 22UF, 250V	1	
C410	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C413	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C414	ECQU2A473ML	P 0.047UF, M,250V	1	
C421	F1J1C1050011	C 1UF, Z, 50V	1	
C422	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C425	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	F1J1C1050011	C 1UF, Z, 50V	1	

072	1000000000	0.001, 2.00	1	
-----	------------	-------------	---	--

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429	F1E2J4730001	C 0.047PF, , 600V	1	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432	F1J1C1050011	C 1UF, Z, 50V	1	
C433	ECJ3XB1E104K	C 0.1UF, K, 25V	1	
C434	F1J1C1050011	C 1UF, Z, 50V	1	
C436	F1J1C1050011	C 1UF, Z, 50V	1	
C440	ECA1HM100	E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446,47	F2B2W2010001	C 200UF, 450V	2	
C450	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF, J, 1.2KV	1	
C460,61	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C467	ECKCNA221KB7	C 220PF, M,	1	
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C469	ECKCNA221KB7	C 220PF, M,	1	
C470	F0CAF105A021	C 1UF, 250V	1	
C473,74	ECKCNA101KB7	C 100PF	2	
C476	ECKCNA101KB7	C 100PF	1	
C478	ECKCNA101KB7	C 100PF	1	
C493	ECA1HM470	E 47UF, 50V	1	
C494	F2A2E1R00008	E 1.0UF, 250V	1	
C497	ECA1HM470	E 47UF, 50V	1	
C501,02	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C503	ECJ2XC1H471J	C 470PF, J, 50V	1	
C504	F1J1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506,07	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C508	ECJ2XC1H471J	C 470PF, J, 50V	1	
C509	ECA1EHG101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C511	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C512-14	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	F2A1A1220011	E 1200UF, 10V	1	
C516	ECJ2XB1C474K	C 0.47UF, Z, 16V	1	
C517	F2A1E221A096	E 220UF, 25V	1	
C518	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C519	F1J1C1050011	C 1UF, Z, 50V	1	
C520	ECWH8683RHV	P 0.068PF, J, 8KV	1	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C526	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	F1J1C1050011	C 1UF, Z, 50V	2	
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C531	ECJ3YB1E105K	C 1UF, K, 25V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2XB1H102K	C 1000PF, K, 50V	2	

0070,71	0000/00100000	0 10000 1 10 000	2	
---------	---------------	------------------	---	--

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C550	ECJ2XC1H331J	C 330PF, J, 50V	1	
C551,52	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C554	F1J1C1050011	C 1UF, Z, 50V	1	
C555	F2A2C471A119	E 470UF, 160V	1	
C556,57	EEUFC1E152	E 1500UF, 25V	2	
C558	F2A1E471A096	E 470UF, 25V	1	
C559	F2A1A1220011	E 1200UF, 10V	1	
C562	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C571	ECJ2XC1H330J	C 33PF, J, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	F2A2A330A022	E 33UF, 100V	1	
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584,85	ECJ2XB1H223K	C 0.022UF, K, 50V	2	
C587	ECJ2XB1H332K	C 3300PF, K, 50V	1	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECJ2FB1E105K	C 1UF, K, 25V	1	
C604,05	F2A2D1510008	E 150UF, 200V	2	
C607	F1J1C1050011	C 1UF, Z, 50V	1	
C608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C610	F1J1C1050011	C 1UF, Z, 50V	1	
C611	F2B2T1420003	E 1400UF, 220V	1	
C612,13	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C615	F2B2T1420003	E 1400UF, 220V	1	
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C625	ECA1HM100	E 10UF, 50V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C627	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C629-31	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C632	ECJ2XC1H331J	C 330PF, J, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C650	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C653	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C654	ECJ3YB1E105K	C 1UF, K, 25V	1	
C655,56	ECJ3YB1E225K	C 2.2UF, K, 25V	2	
C657	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C658	ECJ3YB1E105K	C 1UF, K, 25V	1	
C659	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C660	ECJ2FB1C225K	C 22UF, K, 16V	1	
C661,62	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
D401	B0FBCT000004	DIODE	1	
D404	B0EBKT000007	DIODE	1	



Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D407	MA111	DIODE	1	
D411	B0BB17000009	DIODE	1	
D412	B0HAMM000122	DIODE	1	
D415	B0JAME000099	DIODE	1	
D416	B0HAMP000067	DIODE	1	
D417	B0HAPR000013	DIODE	1	
D418	B0BC8R100013	DIODE	1	
D419,20	B0HAPR000013	DIODE	2	
D423	MA188	DIODE	1	
D425	MA188	DIODE	1	
D429	ERA15-10	DIODE	1	
D430	MA111	DIODE	1	
D431,32	B0JCDD000002	DIODE	2	
D433	B0BC01400033	DIODE	1	
D435	ERA15-10	DIODE	1	
D436-38	MA4200M	ZENER DIODE	3	
D441	B0HAMM000122	DIODE	1	
D444	B0HAMM000122	DIODE	1	
D445	MA4360H	ZENER DIODE	1	
D501	B0HAPR000012	DIODE	1	
D503,04	MA165	DIODE	2	
D505	B0JAME000099	DIODE	1	
D506	MAZ80470LL	ZENER DIODE	1	
D507,08	B0BC7R400023	DIODE	2	
D509	B0JANG000018	DIODE	1	
D511	B0JAML000011	DIODE	1	
D512,13	MA111	DIODE	2	
D514	B0BC6R100025	DIODE	1	
D515	B0BC3R200008	DIODE	1	
D516-18	MA4330M	ZENER DIODE	3	
D520	MA111	DIODE	1	
D521	B0JAME000099	DIODE	1	
D528,29	MA153	DIODE	2	
D530	B0BC9R900013	DIODE	1	
D531	B0HBSN000013	DIODE	1	
D535	MA188	DIODE	1	
D536	B0JBSG000026	DIODE	1	
D538	B0BC5R100039	DIODE	1	
D539,40	B0AARR000010	DIODE	2	
D542	MA4200M	ZENER DIODE	1	
D543	B0BC01400033	DIODE	1	
D544,45	MA4200M	ZENER DIODE	2	
D549	B0BC02500008	DIODE	1	
D551	B0BC01300033	DIODE	1	
D555	B0BC7R400023	DIODE	1	
D559	B0BC7R400023	DIODE	1	
D563	B0BC6R100025	DIODE	1	
D569-72	B0BC02500008	DIODE	4	
D574	MA165	DIODE	1	
D575	MA188	DIODE	1	
D579	MA165	DIODE	1	
D582	MAZ705600F	ZENER DIODE	1	
D585	B0BC7R400023	DIODE	1	
D586	B0HAMP000067	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D587	MA188	DIODE	1	
D588	B0BC3R200008	DIODE	1	
D590	B0BC3R200008	DIODE	1	
D596	ERA15-10	DIODE	1	
D598	B0BC5R100039	DIODE	1	
D599	B0JCND000009	DIODE	1	
D600	B0BC7R400023	DIODE	1	
D601	B0BC5R100039	DIODE	1	
D602	B0BC8R100013	DIODE	1	
F410	K5G102B00020	FUSE	1	
IC401	CNC1S171R	IC	1	
IC402	C0DAEMB00004	IC	1	
IC403-05	CNC1S171R	IC	3	
IC406	C0DAZZZ00021	IC	1	
IC408	CNC1S171R	IC	1	
IC409	MIP2G40MPSCF	IC	1	
IC410	CNC1S171R	IC	1	
IC411	C0DAEMB00004	IC	1	
IC412	CNC1S171R	IC	1	
IC501	C2ABDB000108	IC	1	
IC502	C0EBH0000210	IC	1	
IC504	C0DAEMB00004	IC	1	
IC505	CNC1S171R	IC	1	
IC506	C0ZBZ0000878	IC	1	
IC507	CNC1S171R	IC	1	
IC509	C0DABZZ00010	IC	1	
IC510	C0DBAZG00034	IC	1	
IC512	C0DAEMB00004	IC	1	
IC520	LSSK0062	IC	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00004	CHOKE COIL	2	
L410	ELF17N004A	LINE FILTER	1	
L510	EXCELD25C	BEAD CHOKE	1	
L511	G0A470ZA0033	CHOKE COIL	1	
L512	ELESE4R7JA	PEAKING COIL	1	
L513	EXCELD25C	BEAD CHOKE	1	
L514	G0A100GA0013	CHOKE COIL	1	
P2	K1KA02A00626	2P CONNECTOR	1	
P5	K1KA11AA0194	11P CONNECTOR	1	
P9	K1KA03A00537	3P CONNECTOR	1	
P10	K1KA06A00452	6P CONNECTOR	1	
P11	K1KA02A00626	2P CONNECTOR	1	
P12	K1KA10AA0194	10P CONNECTOR	1	
P23	K1KA03AA0193	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
PMM1	TMM7464-2	CLAMPER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PMM2,M3	TMME088	CLAMPER	2	
PMM4-M6	TMM7464-2	CLAMPER	3	
PMM7	TMME047	CLAMPER	1	
PR401	K5Y502BA0001	FUSE	1	
PR505	K5H5022A0023	FUSE	1	
PR509	ERBSE0R50U	FUSE	1	
PR601	K5G312B00012	FUSE	1	
Q401	B1CHND000004	TRANSISTOR	1	
Q402	B1DFDD000019	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEKQ000003	TRANSISTOR	1	
Q407	B1HFCFA00021	TRANSISTOR	1	
Q408,09	B1DHCD000034	TRANSISTOR	2	
Q412,13	B1DEGQ000070	TRANSISTOR	2	
Q418	2SD1819A	TRANSISTOR	1	
Q420-22	2SD1819A	TRANSISTOR	3	
Q434	B1CEJQ000003	eds	1	
Q501,02	2SD1820A	TRANSISTOR	2	
Q505	B1CEJQ000002	eds	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	B1HBCFA00033	TRANSISTOR	1	
Q509	B1HDCEA00001	TRANSISTOR	1	
Q510	B1DHBD000005	TRANSISTOR	1	
Q512	B1CBGD000001	FET	1	
Q517	B1HBCFA00033	TRANSISTOR	1	
Q520	B1HBCFA00033	TRANSISTOR	1	
Q521	B1CBGD000001	FET	1	
Q524	B1CFGF000008	TRANSISTOR	1	
Q525	B1CBGD000001	FET	1	
Q527	B1CERL000005	TRANSISTOR	1	
Q530	2SD1819A	TRANSISTOR	1	
Q535	2SD1819A	TRANSISTOR	1	
Q537	B1DFDD000019	TRANSISTOR	1	
Q538	B1CBGD000001	FET	1	
Q540	B1DHCD000034	TRANSISTOR	1	
Q541	B1CBGD000001	FET	1	
Q551	B1CBGD000001	FET	1	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHCD000034	TRANSISTOR	1	
Q555,56	B1DFGD000045	TRANSISTOR	2	
Q557-59	2SD1819A	TRANSISTOR	3	
Q561	2SD1819A	TRANSISTOR	1	
Q563	B1CFGF000008	TRANSISTOR	1	
Q564,65	2SB1218ARL	TRANSISTOR	2	
Q566	2SD1819A	TRANSISTOR	1	
Q568	B1CHGD000006	TRANSISTOR	1	
Q569	B1CBGD000001	FET	1	
R401	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R402	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R403	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R404	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R406	ERX12SJ2R2V	M 2.2 OHM, J,1/2W	1	
R407	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R410	D1F5100E0003	CHIP RESISTOR	1	
R412	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R413	D1F5100E0003	CHIP RESISTOR	1	
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ305	M 3MOHM,J,1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R420	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R423	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R425	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R427	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R428	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R429	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R432	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R434	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R435	ERJ8ENF4303	M 43KOHM, 1/8W	1	
R436	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R448,49	D0XGR08J0001	M 0.08OHM,J, 5W	2	
R450	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R453	ERJ6GEYJ305	M 3MOHM,J,1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R455	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R456	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R459	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R461	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R467	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R471	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476,77	ERJ14YJ181U	M 181 OHM, J,1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R480	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	D0BF225JA030	M 22MOHM,J,0.05W	1	
R487	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R488	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R492	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R493	ERG12SJ120	M 12 OHM, J,1/2W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R498	ERG3SJ101	M 100 OHM, J, 3W	1	
R499	D0BF394JA029	M 390KOHM,J,0.05W	1	
R501	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R502,03	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R505	ERJ8GEYJ330	M 33 OHM, J,1/8W	1	
R506	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R507	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R518	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R524	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R528	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R529	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R530	ERJ6RBD3302	M 33KOHM,F,1/10W	1	
R532	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R533	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R534	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R535,36	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R537	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R539	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R540,41	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R542	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R543	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R546	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R547	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R548	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R549	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R550	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R551	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R552	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R553	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R554	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R558	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R559	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R560	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R561	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R562	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R563	ERJ6GEYJ2R2	M 2.2 OHM,J,1/10W	1	
R564	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R565,66	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R567,68	ERJ8ENF1004	M 100KOHM, 1/8W	2	
R569	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R570	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R571	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R572,73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577,78	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R580,81	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R586	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R587	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589,90	ERJ8GEYJ123	M 12KOHM, J,1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J,1/8W	1	
R596	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R597,98	ERJ6ENF3302	M 33KOHM, 1/10W	2	
R599,00	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J,1/8W	1	
R609	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R610,11	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R613	ERJ6ENF2702	M 27KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R616,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R618	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R619	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R621	ERJ8GEYJ123	M 12KOHM, J,1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R627	ERJ6GEYJ752	M 7.5KOHM,J,1/10W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R630	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R631	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R633	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R634	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R637	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R638	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R639,40	ERJ8RQJR39	M0.39 OHM, 1/8W	2	
R641	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R642-44	ERJ8RQJR39	M0.39 OHM, 1/8W	3	
R645	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R646,47	ERJ8GEYJ223	M 22KOHM, J,1/8W	2	
R648	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R649	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R650	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R651,52	ERJ6ENF1002	M 10KOHM, 1/10W	2	
R653	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R654	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R655	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R658	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
R662	ERJ6ENF1503	M 150KOHM, 1/10W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
R666	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R667,68	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R671	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
R672,73	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R674	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R675	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R676	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
R677	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R678	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R679,80	ERJ8RSJR16V	M 16 OHM, 1/8W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R682	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R683	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R684	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R685,86	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R687	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R688,89	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R690	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R692	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R693	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R695	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J,1/8W	1	
R697	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R698	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R699-08	ERJ8GEYJ105	M 1MOHM, J,1/8W	10	
R711	ERJ8RSJR16V	M 16 OHM, 1/8W	1	
R712	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R714	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R715	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R921	ERJ6RBD3302	M 33KOHM,F,1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R931	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R932	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R933	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R935	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R936	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R937	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R938	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R939,40	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R943	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R945	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R946	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R947	ERJ8GEYJ331	M 330 OHM, J,1/8W	1	
R950	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R951,52	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R953	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R955	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R956	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
RL402,03	TSEH8011	RELAY	2	
S401,02	J0LT00000009	SWITCH	2	
T401	G4D4A0000117	SWITCHING TRANSFORMER	1	
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	
T404	ETS42LA12GAD	SWITCHING TRANS	1	
T407	ETQ11K5AZ	CHOKE TRANS	1	
T410	ETS25AF115AH	SWITCHING TRANS	1	
T601	G4D2A0000264	SWITCHING TRANS	1	
W9,10	J0JKB0000037	FLAT CORE	2	


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
X501	H2B400400021	CRYSTAL	1	
Z1,Z2	K4ZZ01000206	TERMINAL	2	
Z420	TMM23417	CLAMPER	2	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZN401	ERZVGED621T2	VARISTOR	1	
ZN402	D4EAD7510001	VARISTOR	1	
ZN404	ERZVGAD681T2	VARISTOR	1	
ZN405-06	ERZVA7D511	VARISTOR	2	

17. Schematic Diagram for printing with A4

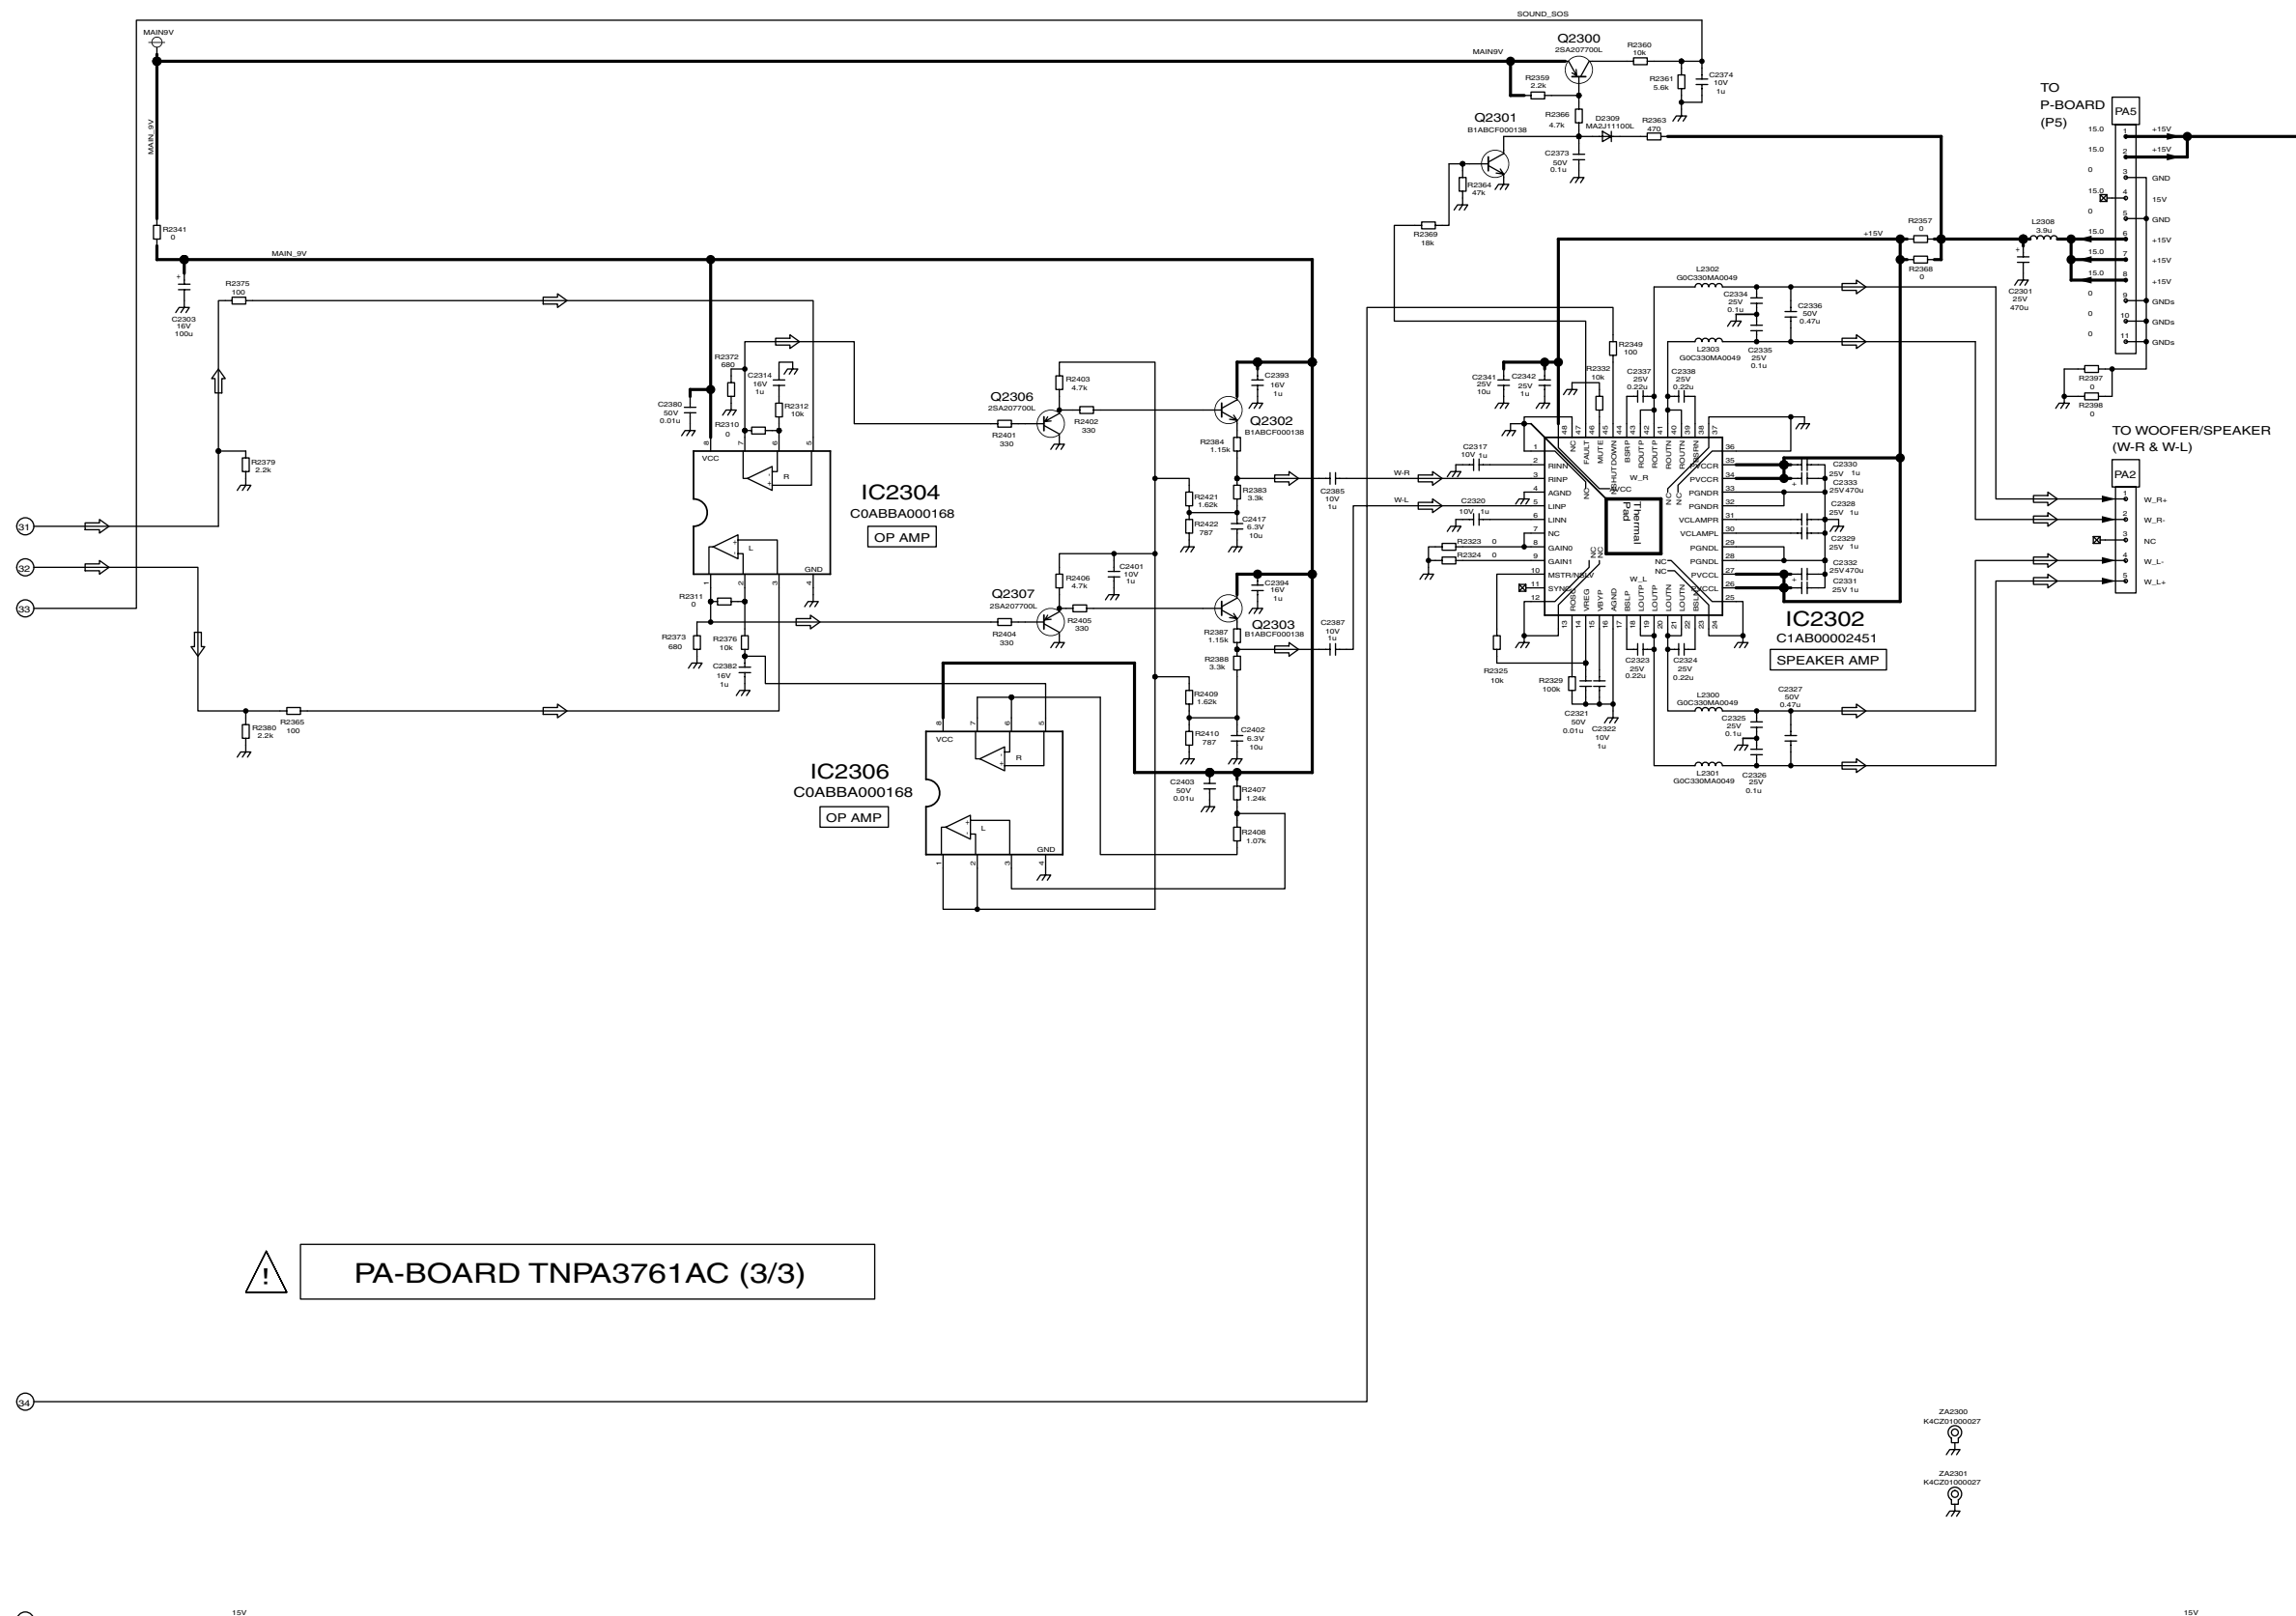




SC-BOARD (1/2) TNPA3814

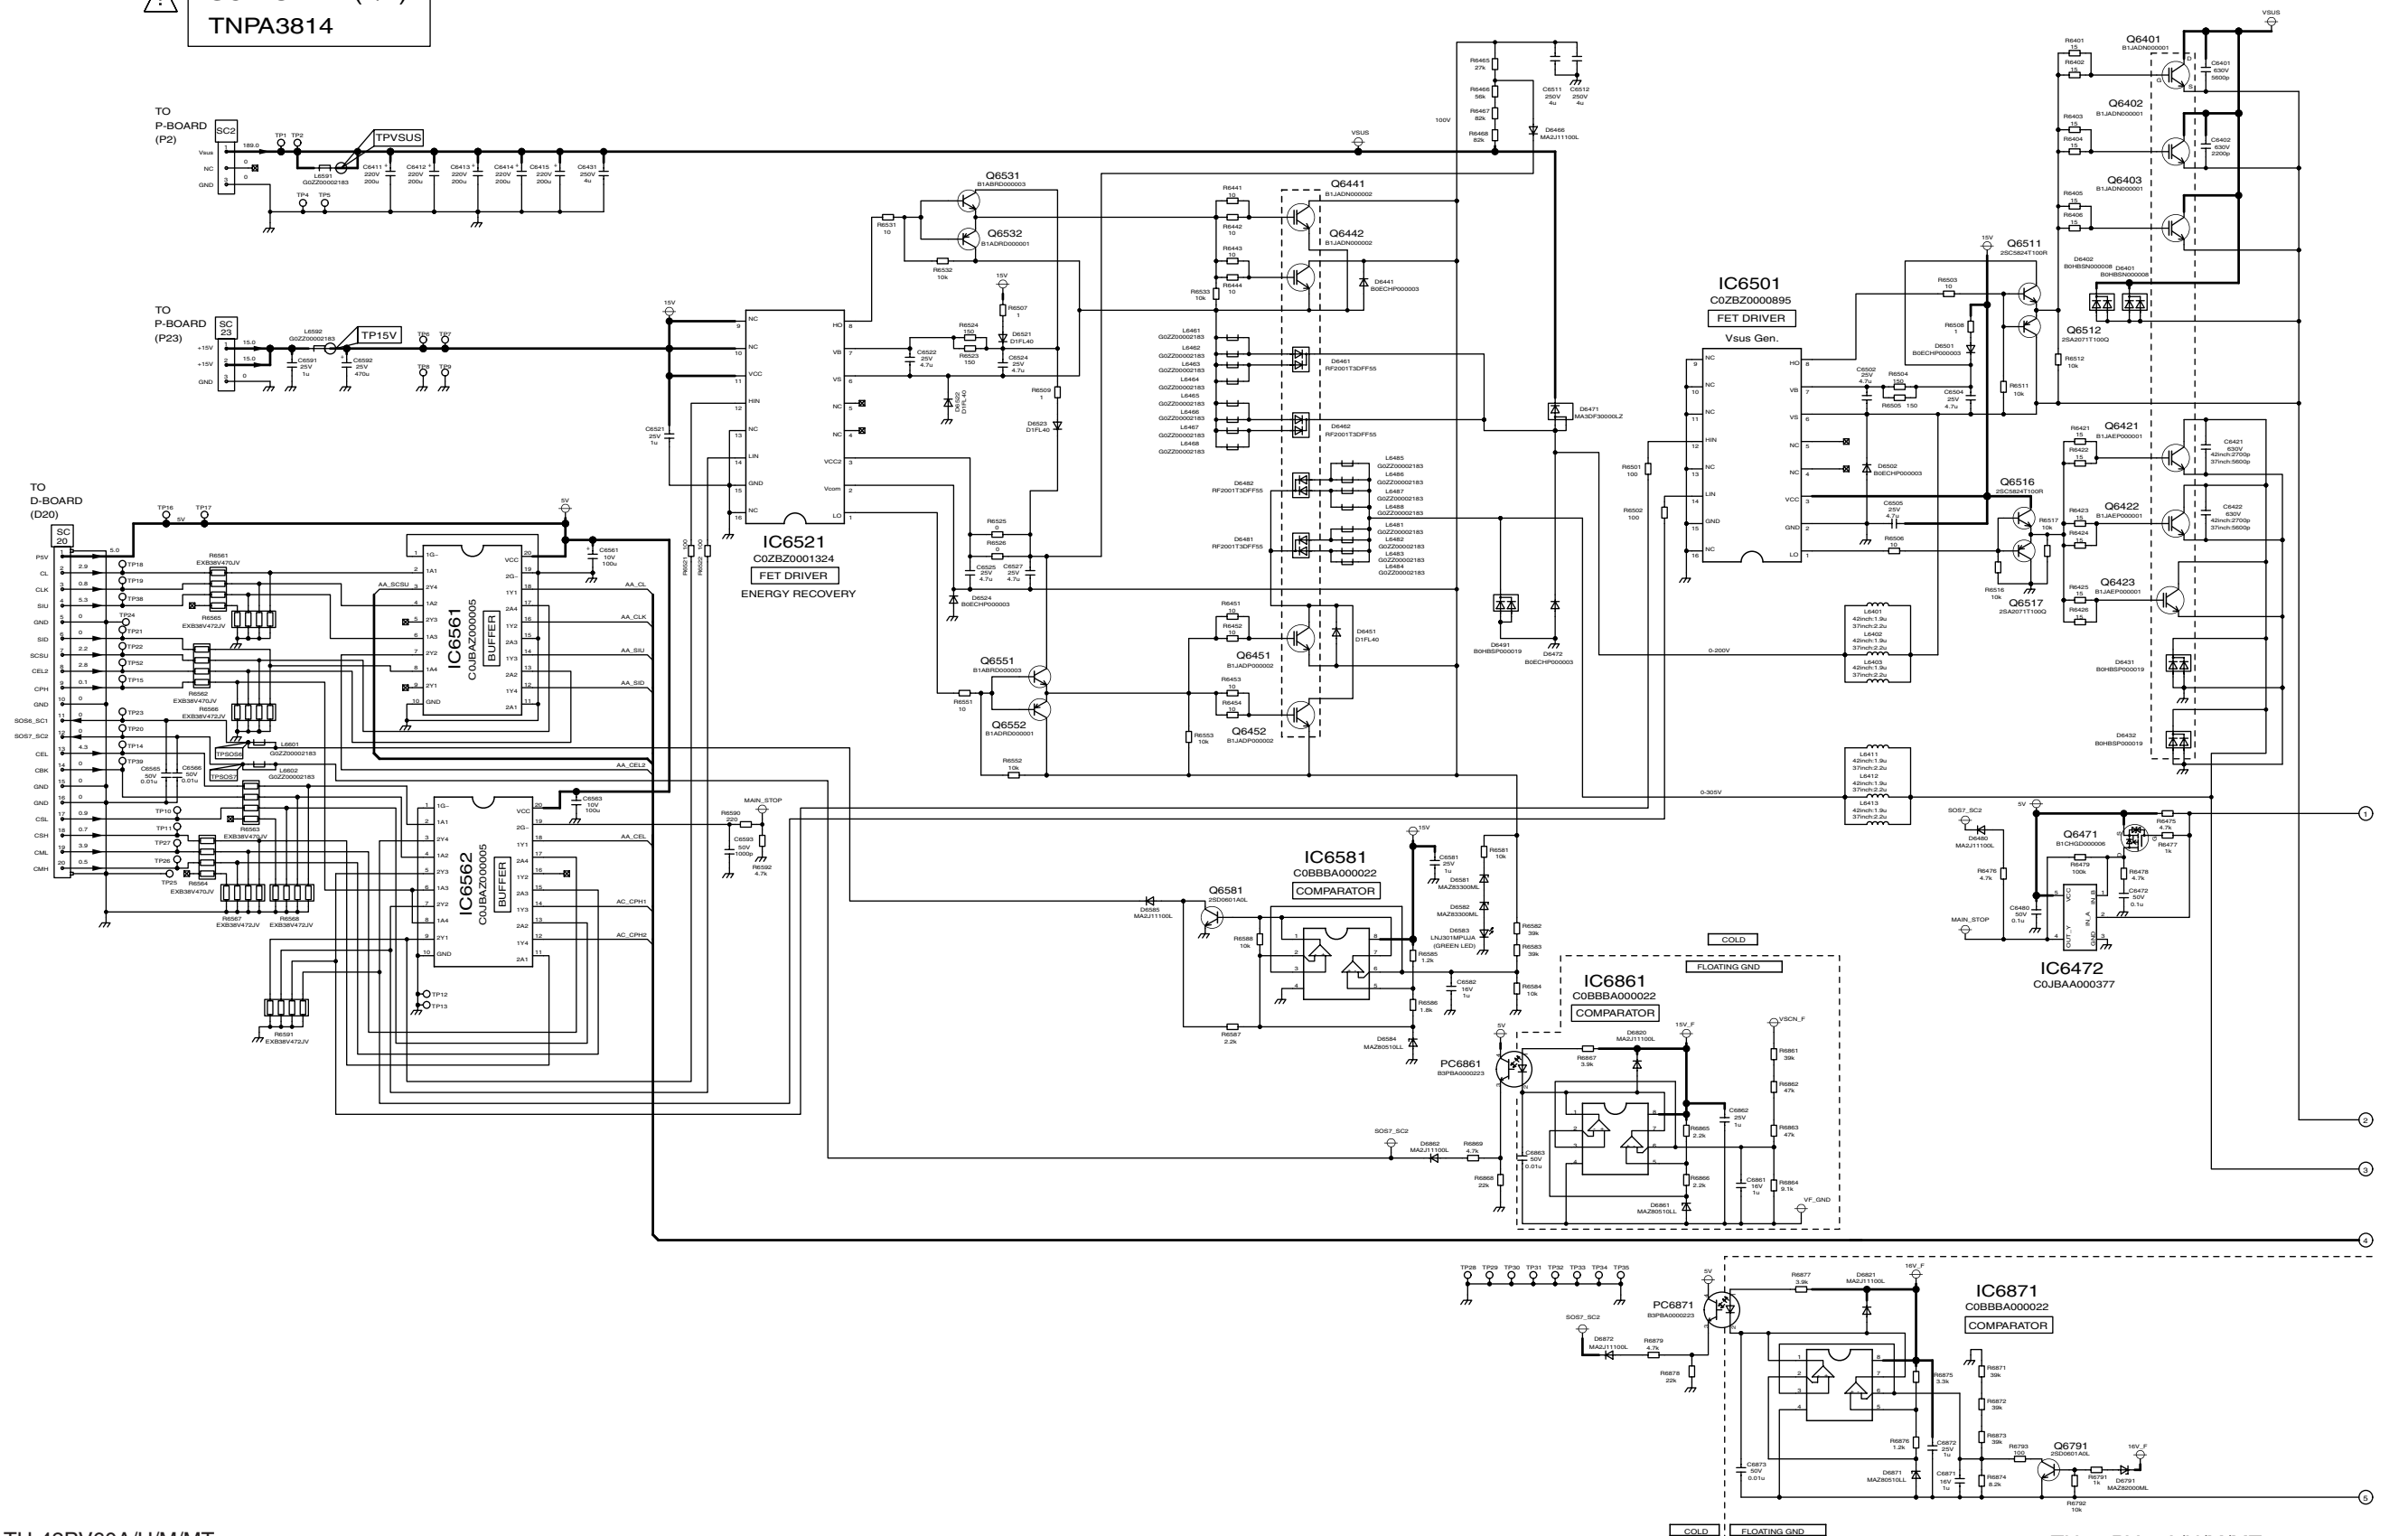

SC-BOARD (2/2)
TNPA3814

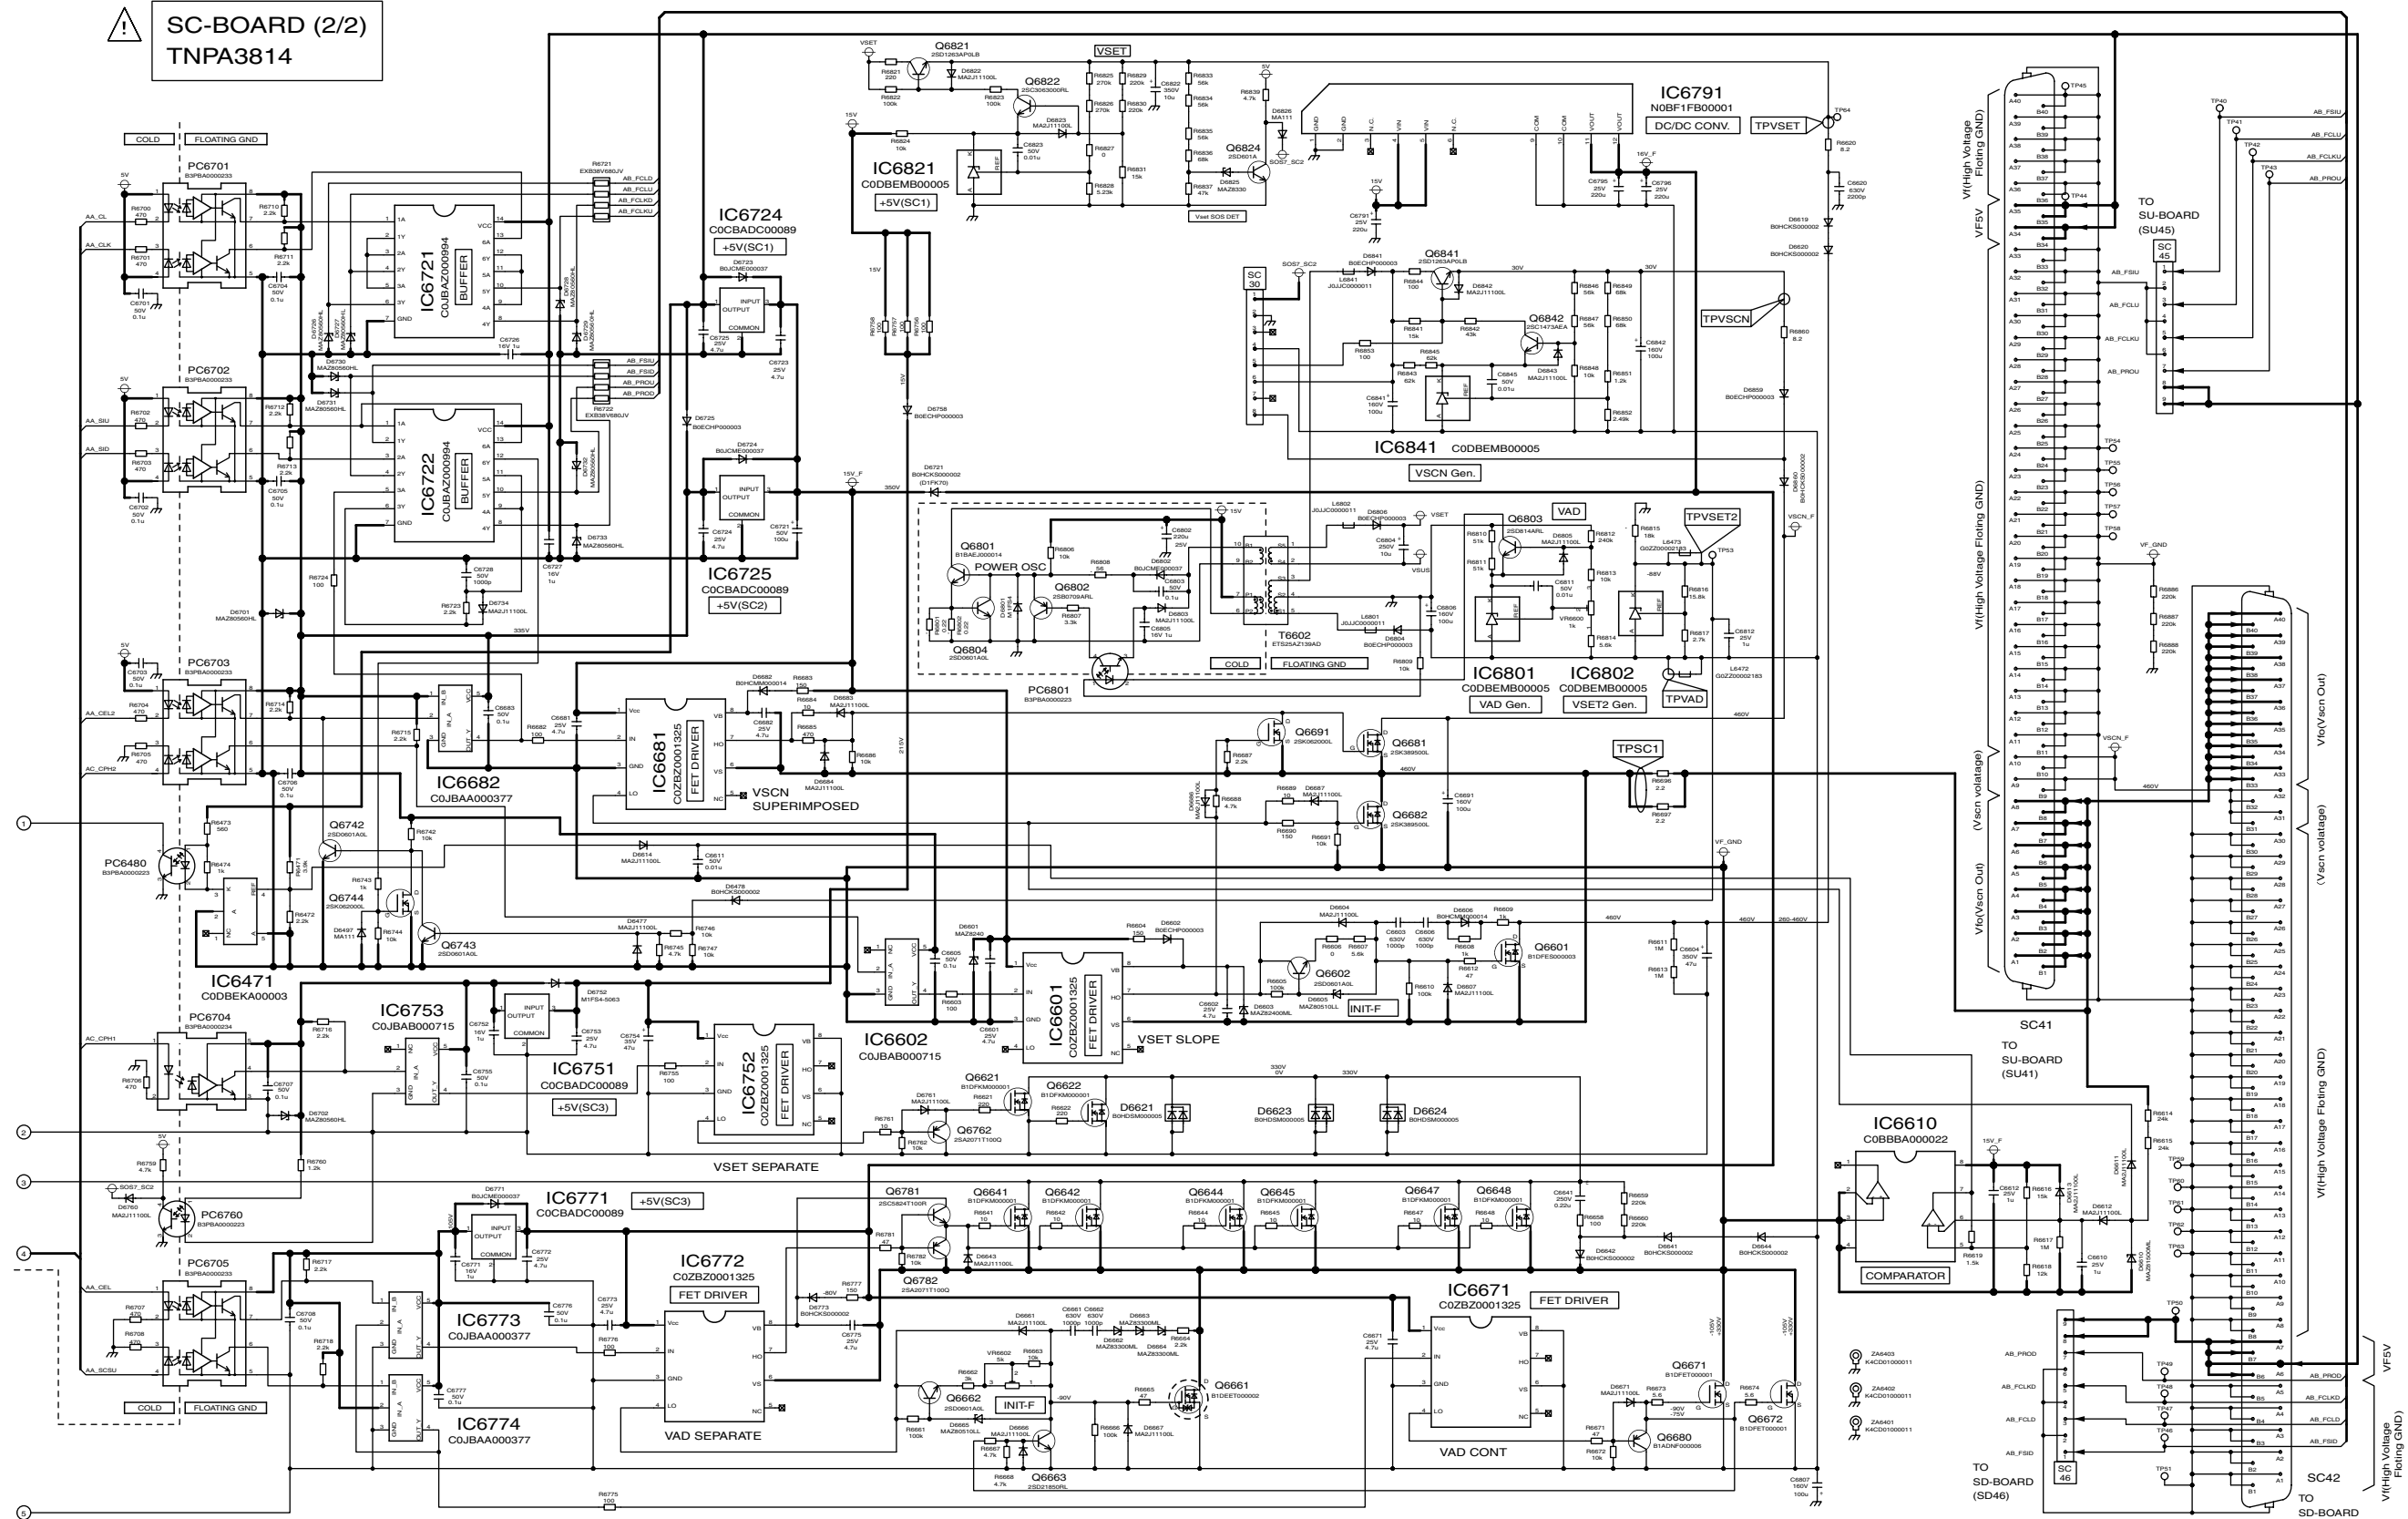

TH-42PV60A/H/M/MT
SC-Board (2 of 2) Schematic Diagram

TH-42PV60A/H/M/MT
SC-Board (2 of 2) Schematic Diagram



SD-BOARD TNPA3819 (1/2)

DOWN

To 1st 96pins of
SCAN ELECTRODES

To 2nd 96pins of
SCAN ELECTRODES

SD1

SD2

IC6951
AN16072A-VT
PDP SCAN DRIVER

IC6952
AN16072A-VT
PDP SCAN DRIVER

IC6953
AN16072A-VT
PDP SCAN DRIVER


SD42(Card Edge 80Pin)

TO
SC-BBOARD
(SC42)




SD-BOARD TNPA3819 (2/2)

DOWN

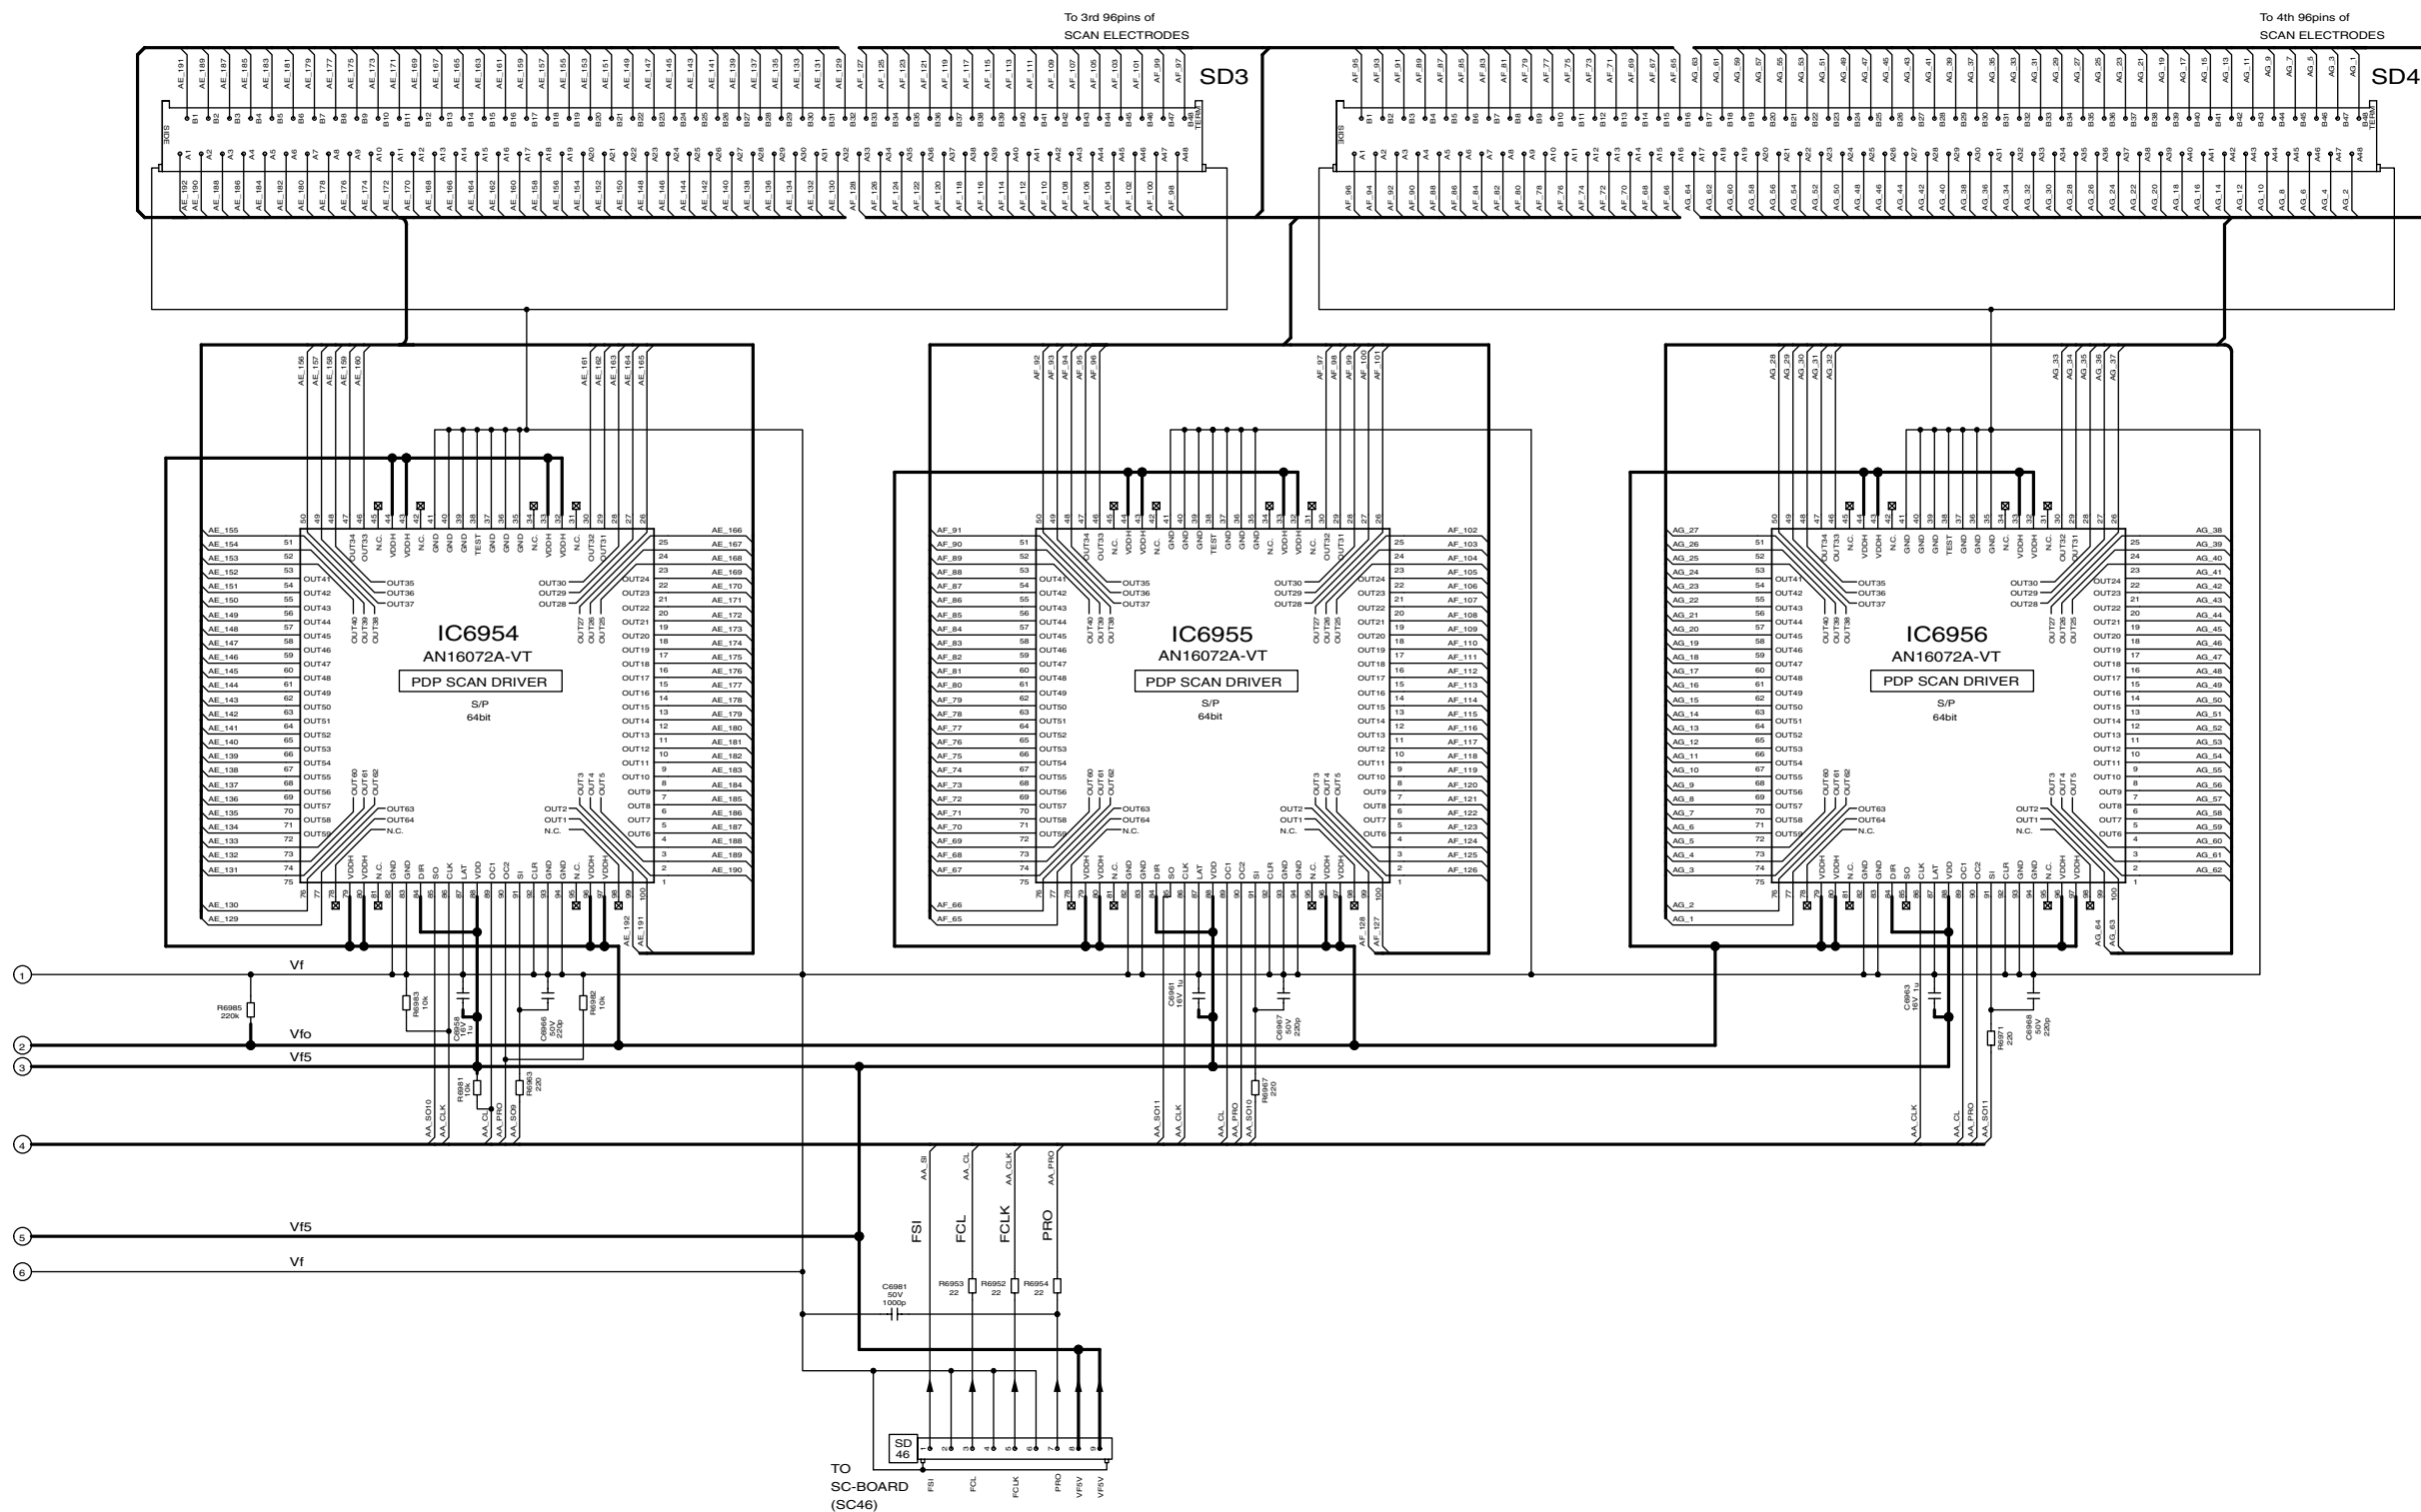

SS-BOARD
TNPA3815

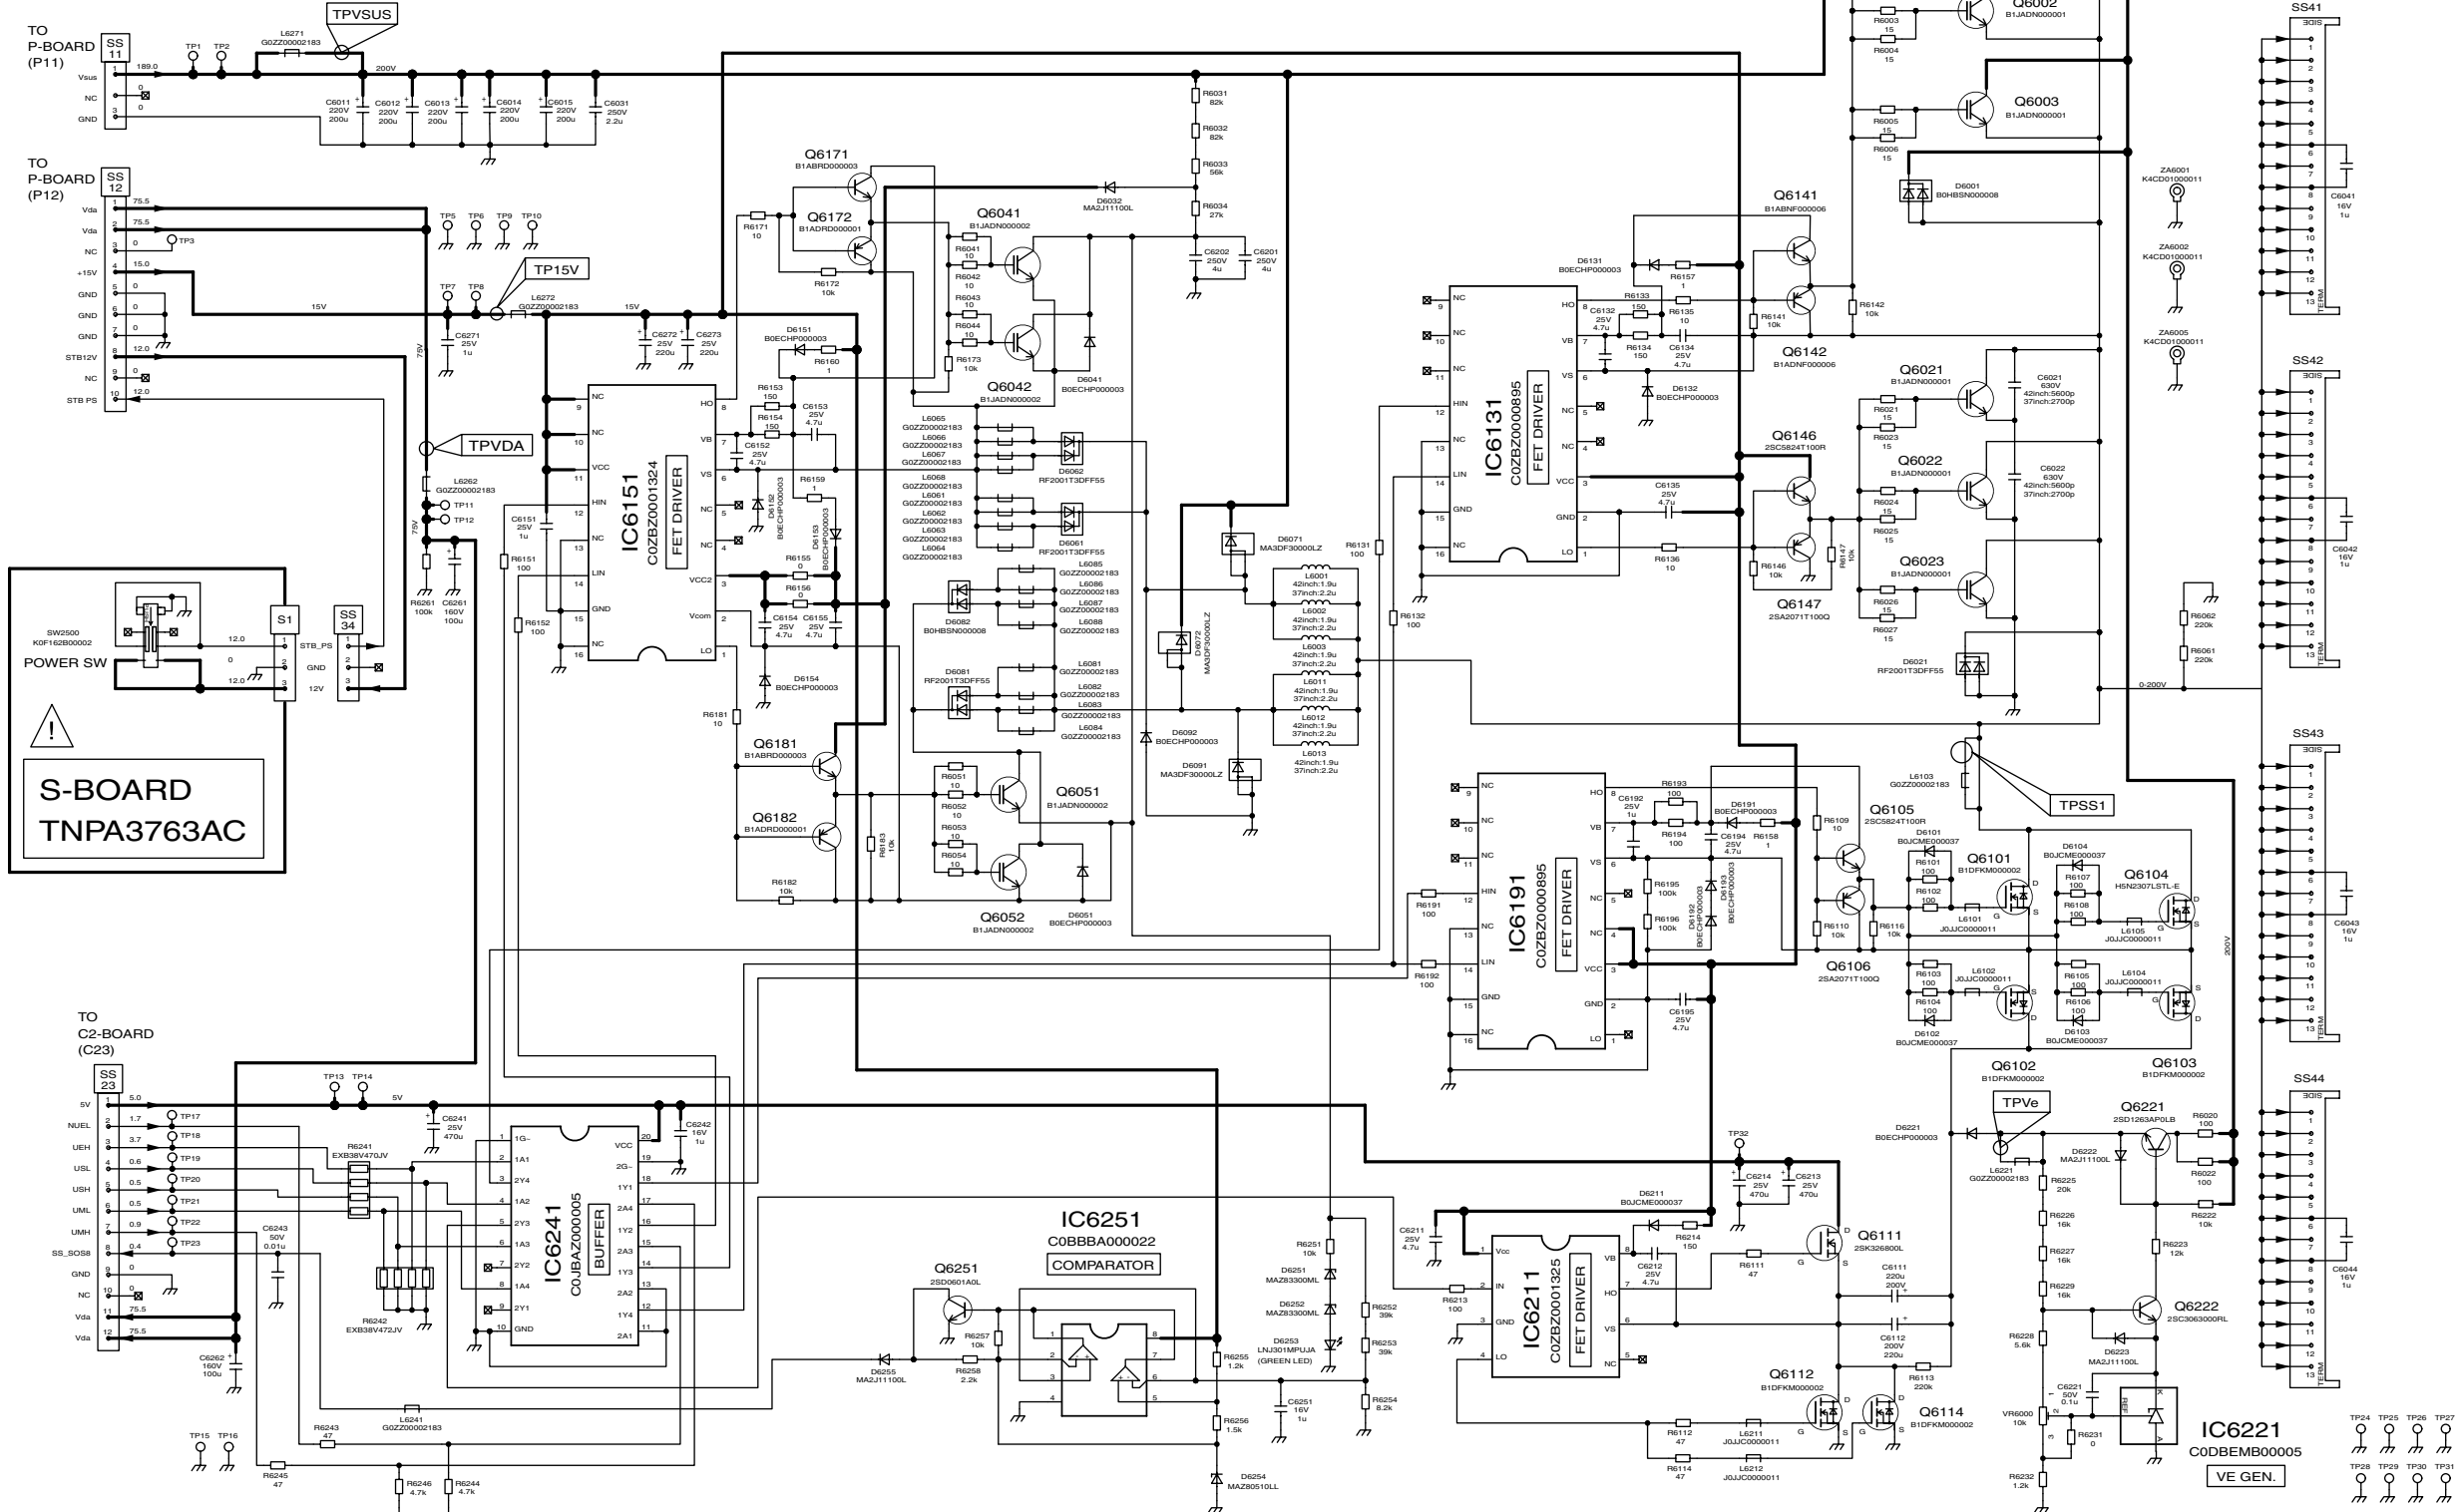

TH-42PV60A/H/M/MT
SS and S-Board Schematic Diagram


TH-42PV60A/H/M/MT
SS and S-Board Schematic Diagram



UP


To 1st 96pins of
SCAN ELECTRODES

To 2nd 96pins of
SCAN ELECTRODES

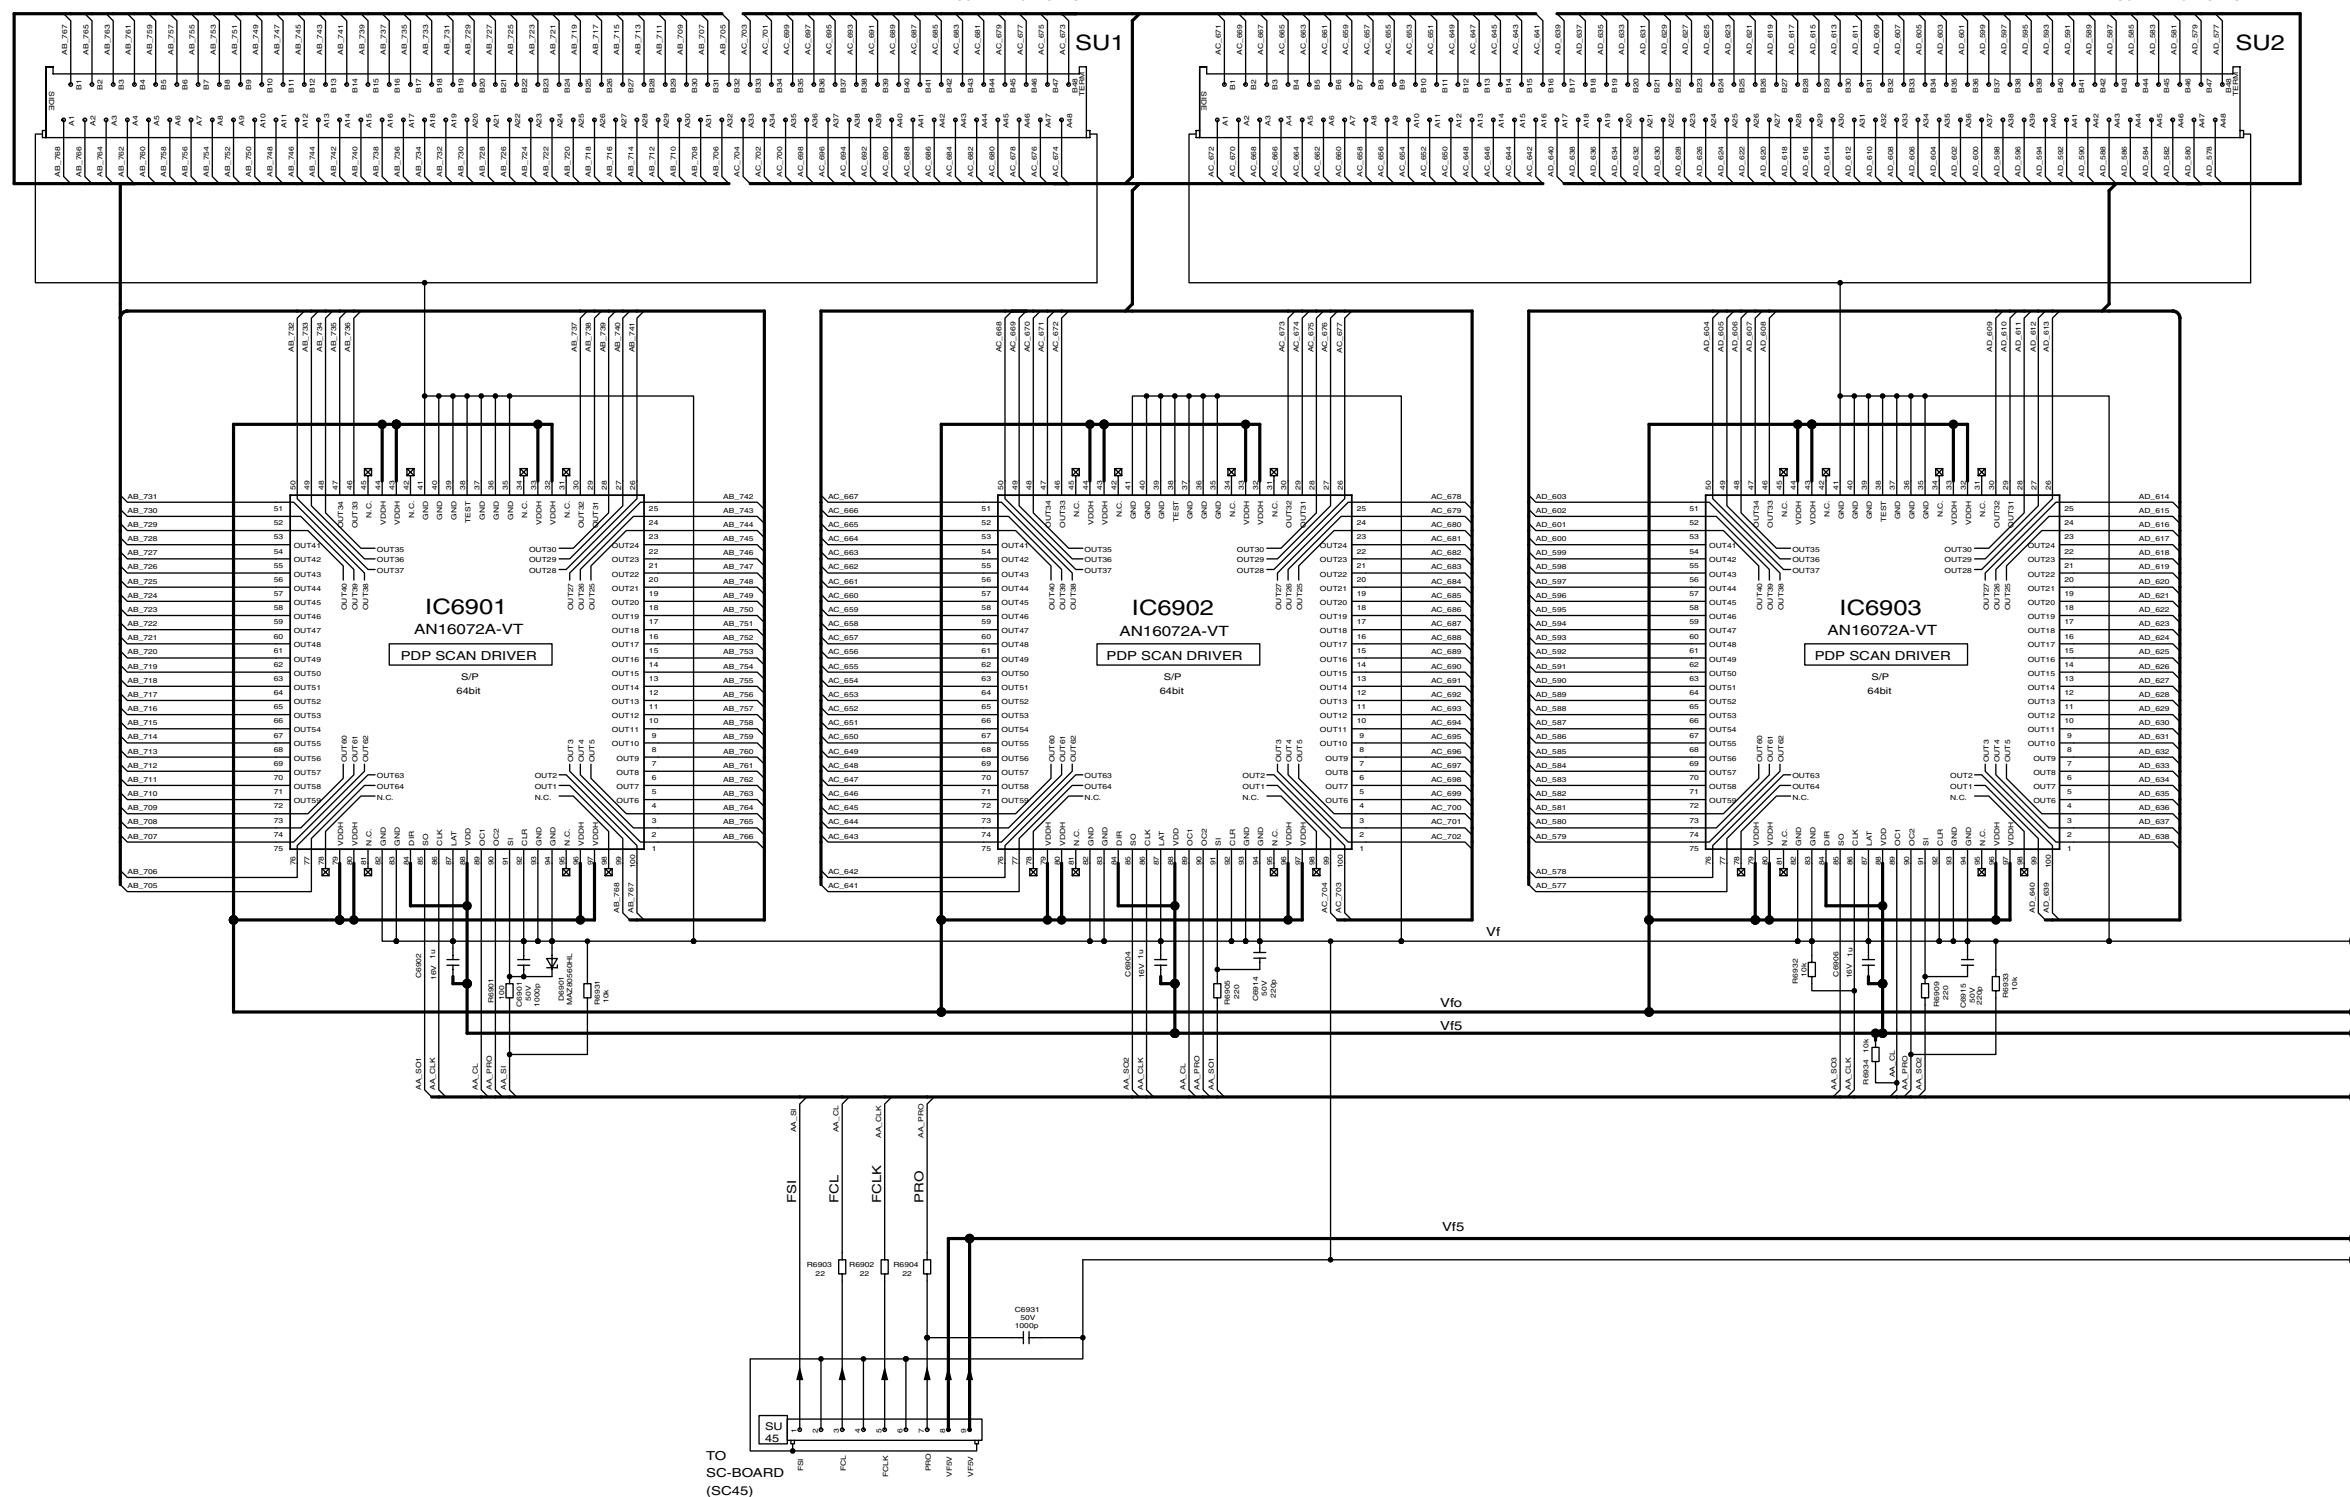

TH-42PV60A/H/M/MT
SU-Board (1 of 2) Schematic Diagram

TH-42PV60A/H/M/MT
SU-Board (1 of 2) Schematic Diagram





14 Schematic and Block Diagram

14.1. Schematic Diagram Notes

Important Safety Notice

Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.

Notes:

1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
3. Coil
Unit of inductance is H, unless otherwise noted.
4. Test Point
 : Test Point position
5. Earth Symbol
 : Chassis Earth (Cold)  : Line Earth (Hot)
6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
7. When arrow mark () is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video  Audio 
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.

All circuits, except the Power Circuit, are cold.


Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

14.2. Main Block Diagram

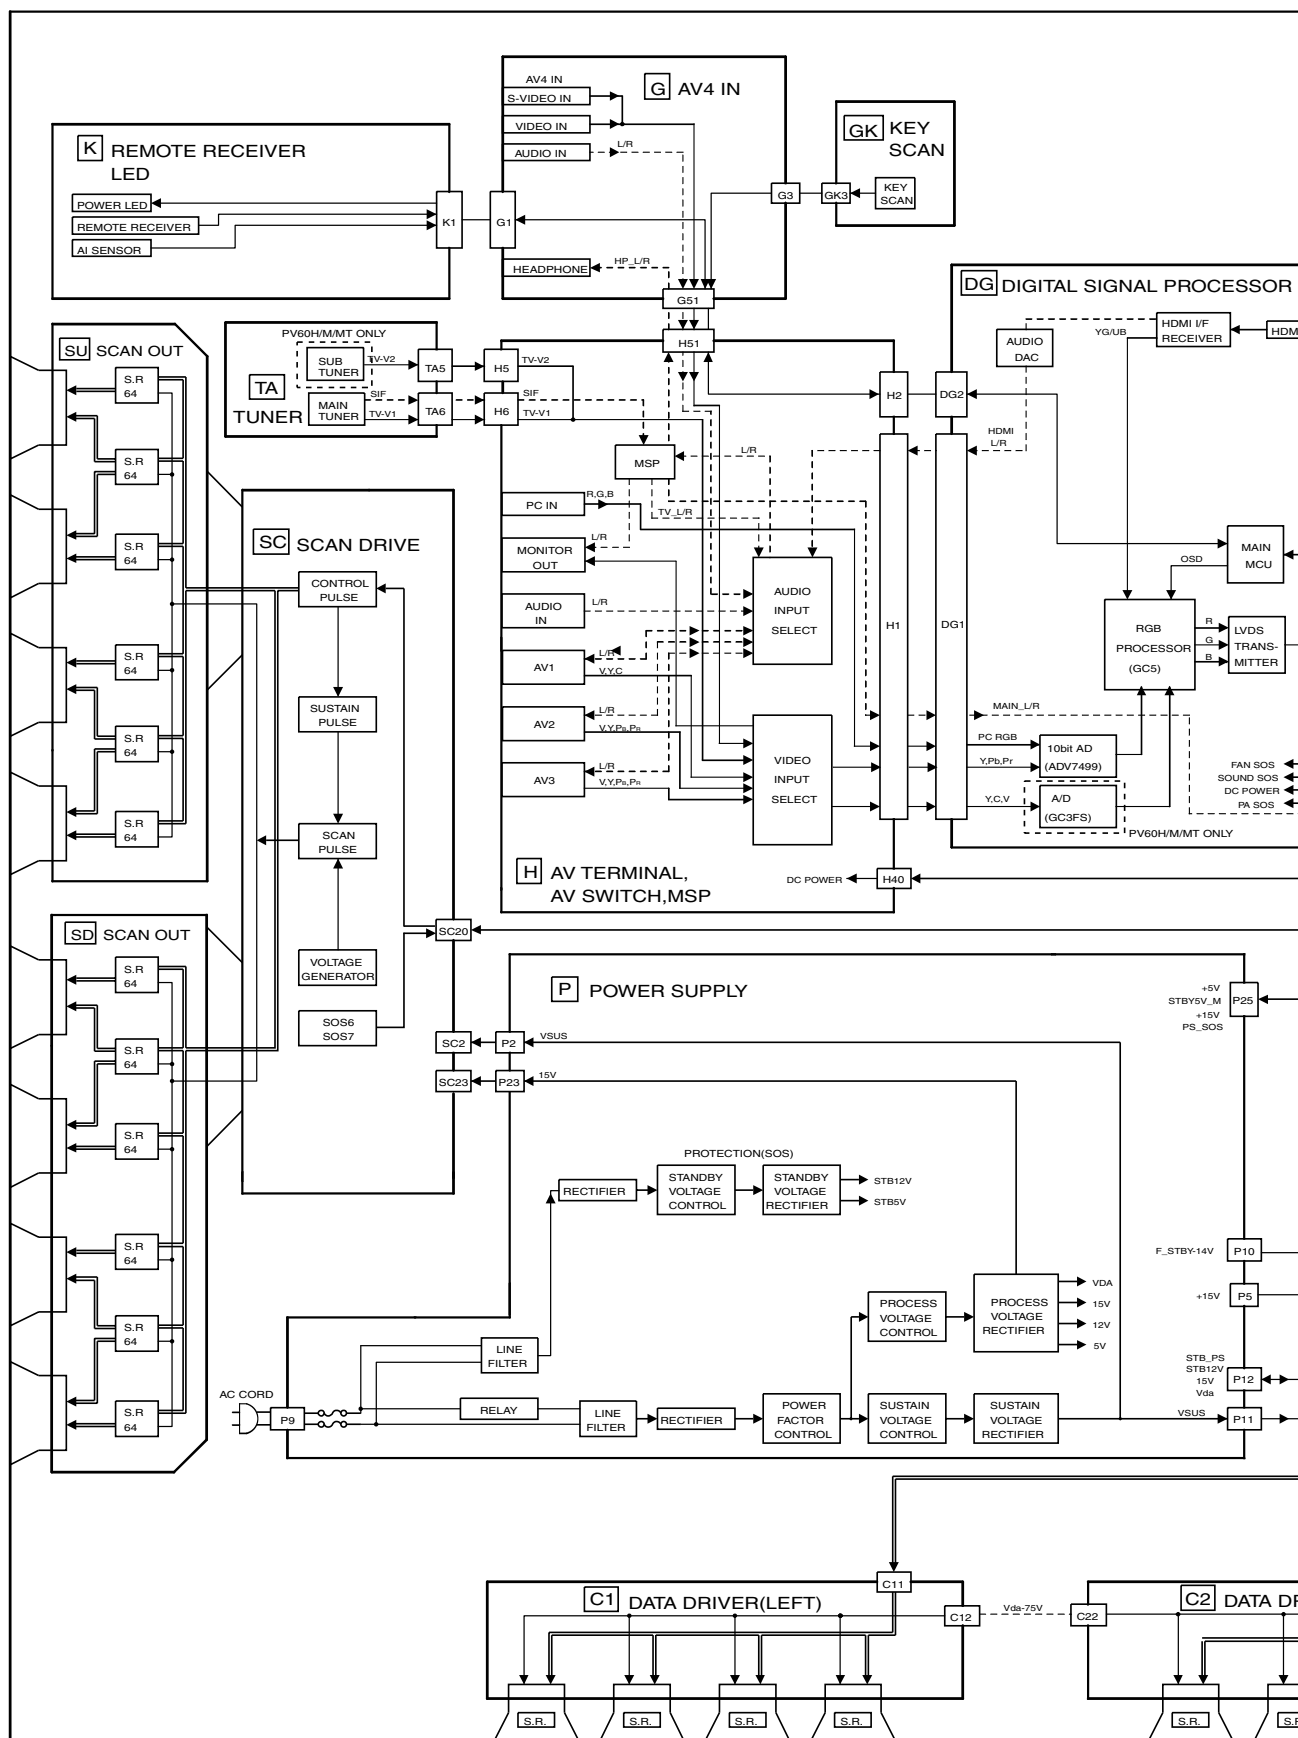

TH-42PV60A/H/M/MT
Main Block Diagram

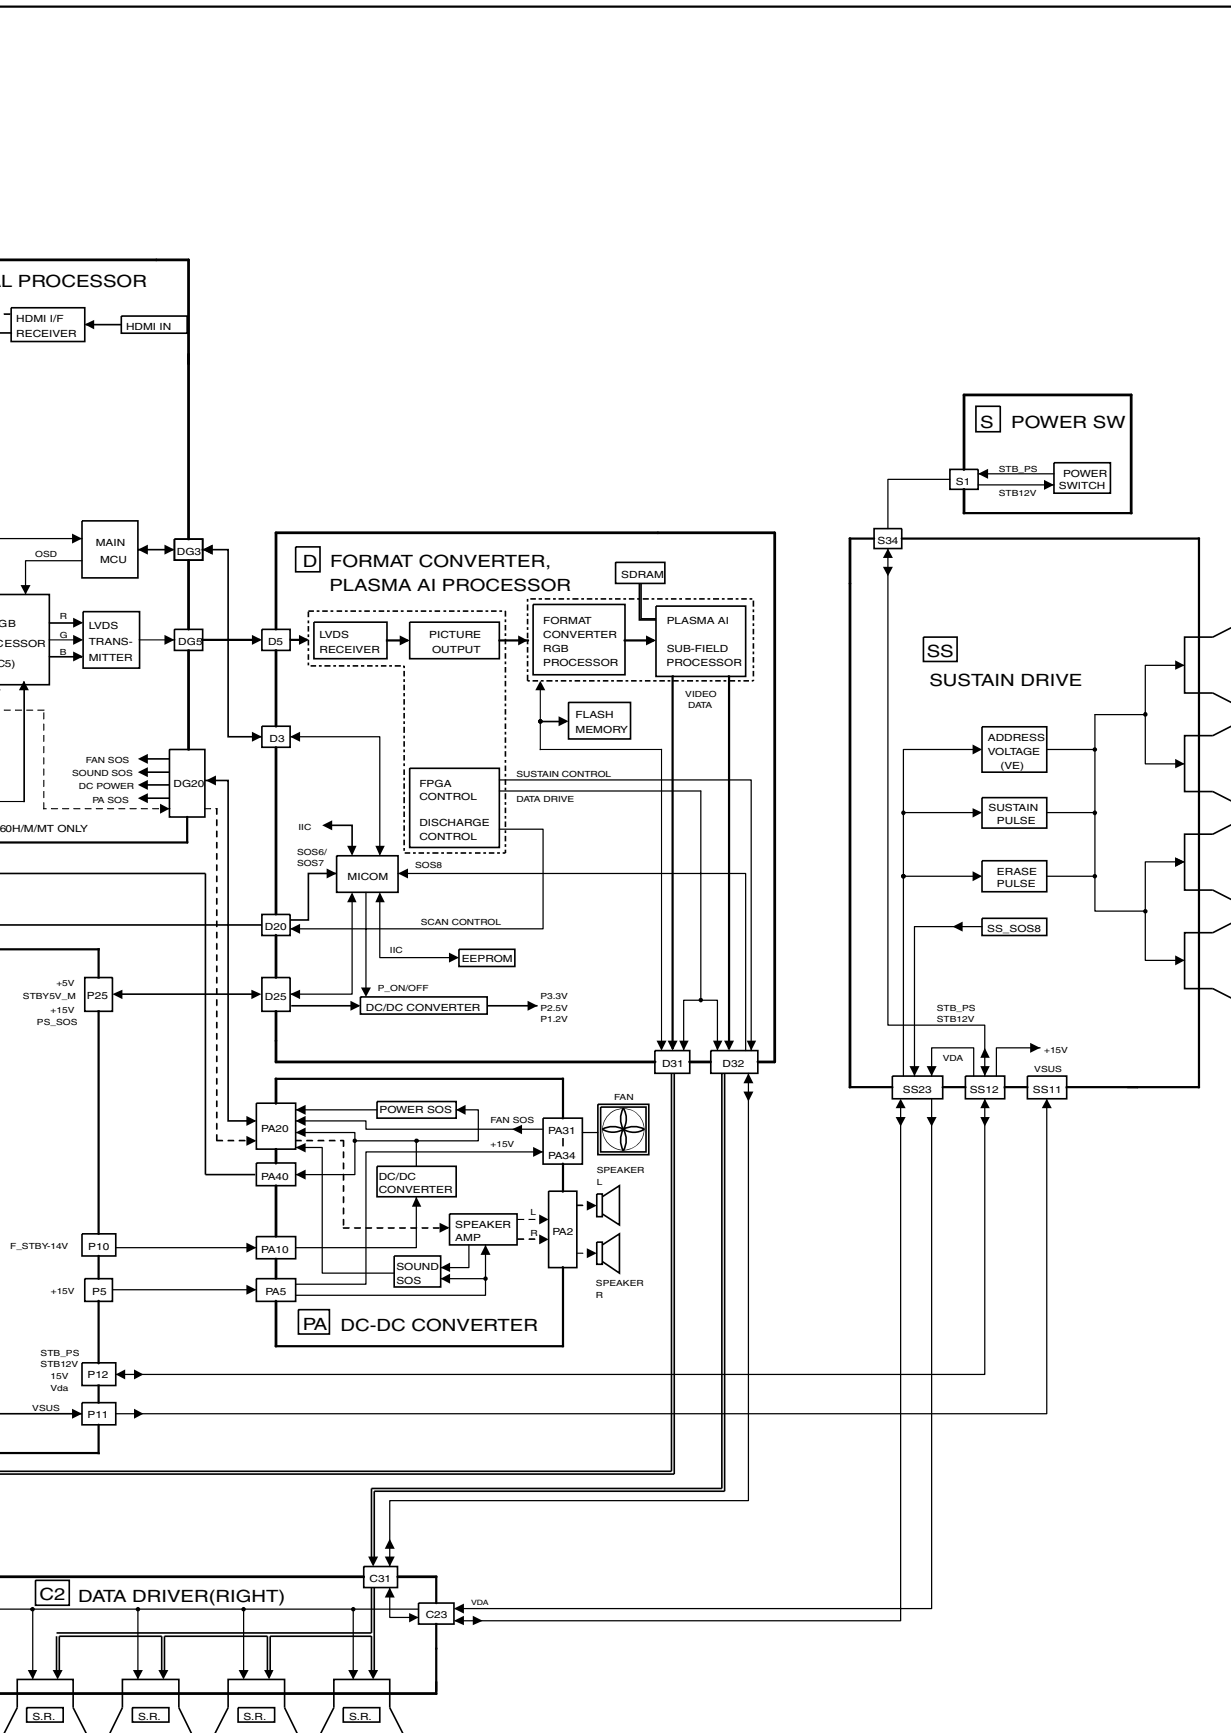



TH-42PV60A/H/M/MT
Main Block Diagram





14.4. P-Board (1 of 6) Schematic Diagram

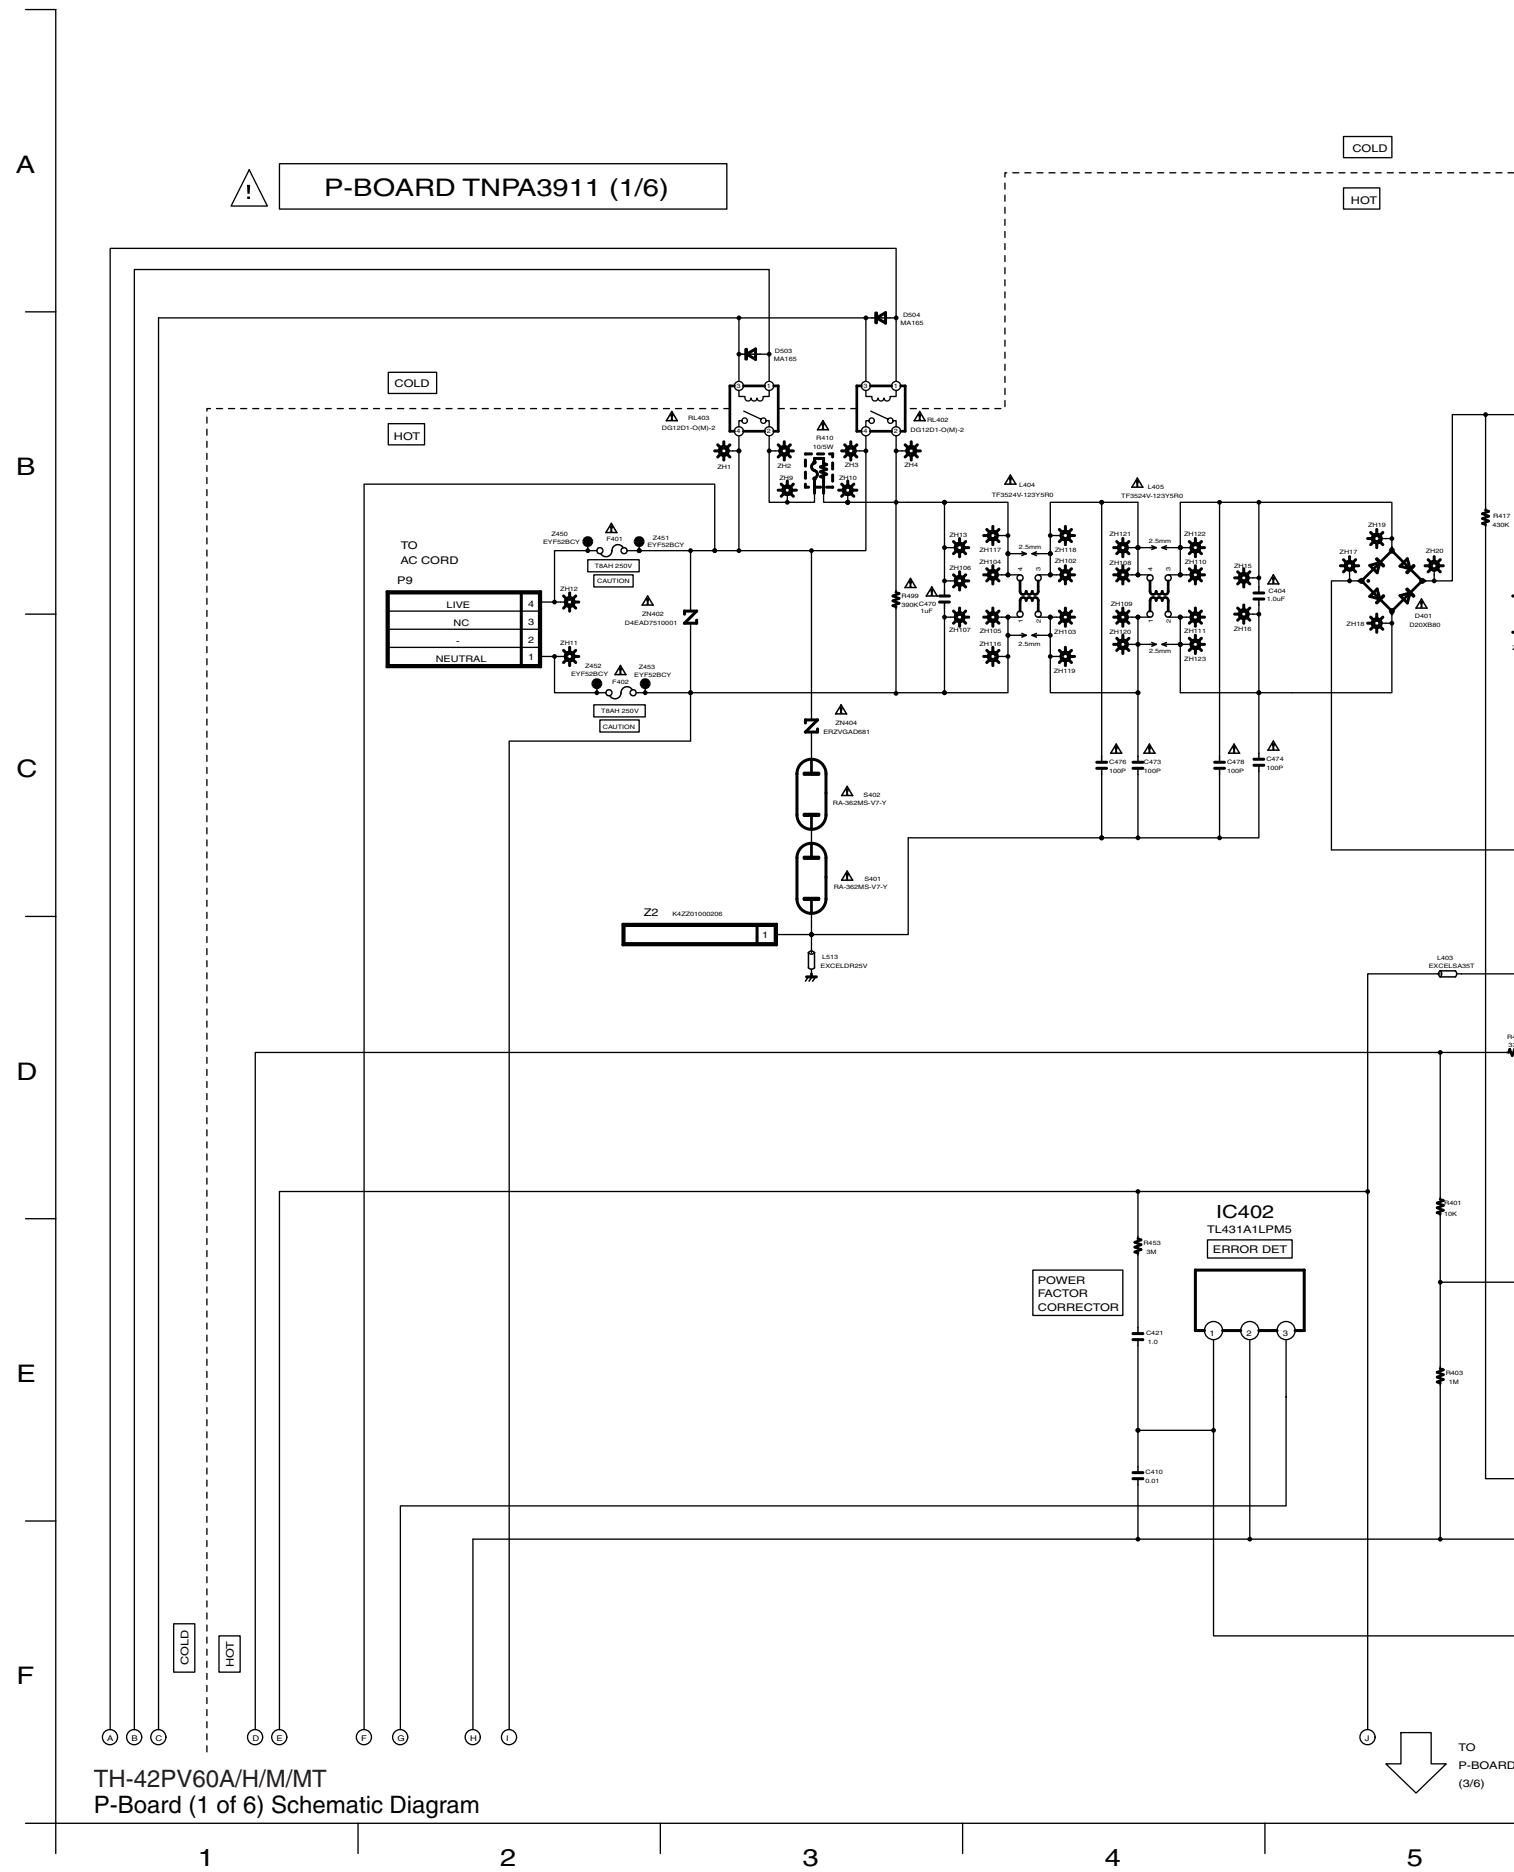

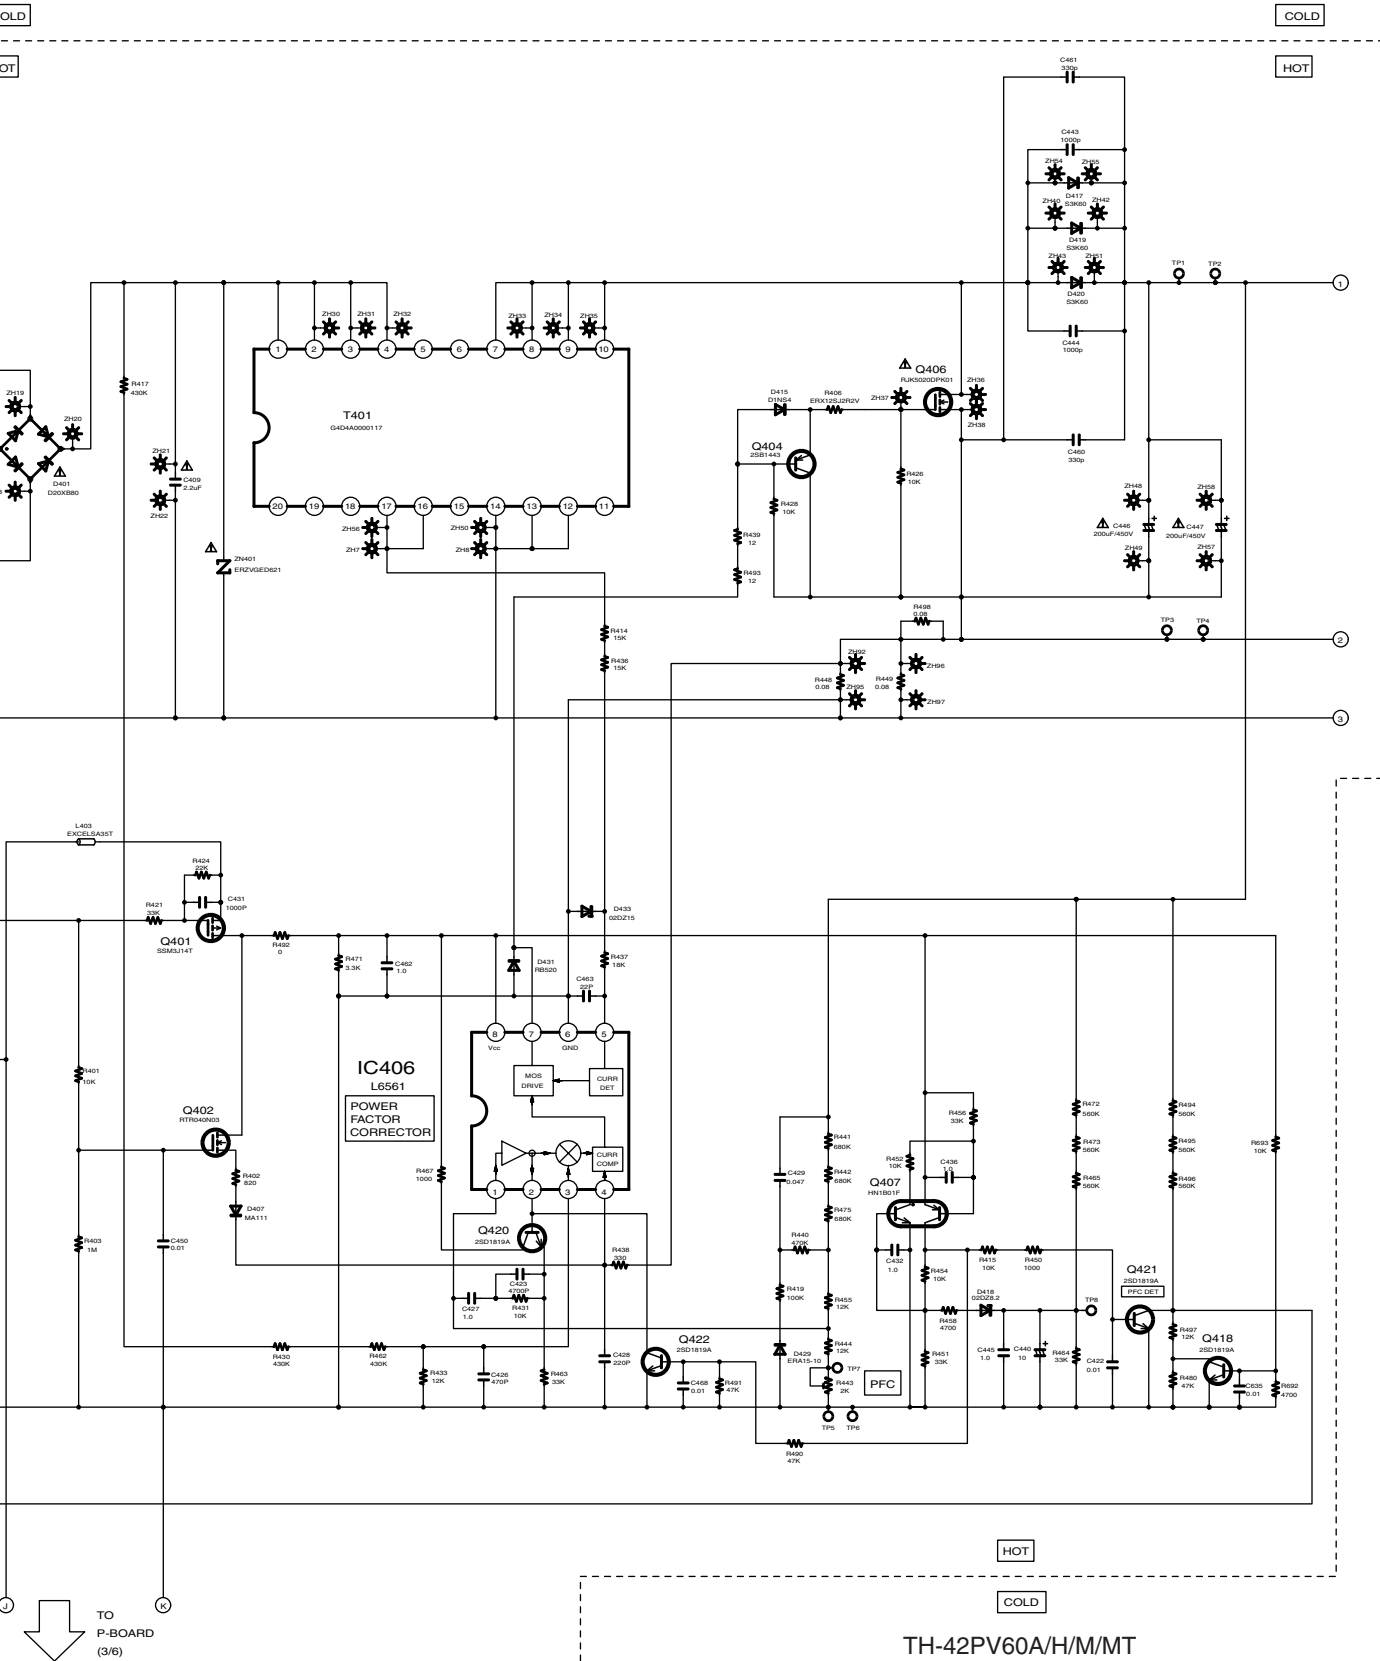


TH-42PV60A/H/M/MT
P-Board (1 of 6) Schematic Diagram




14

TH-42PV60A/H/M/MT
P-Board (2 of 6) Schematic Diagram

14.6. P-Board (3 of 6) Schematic Diagram

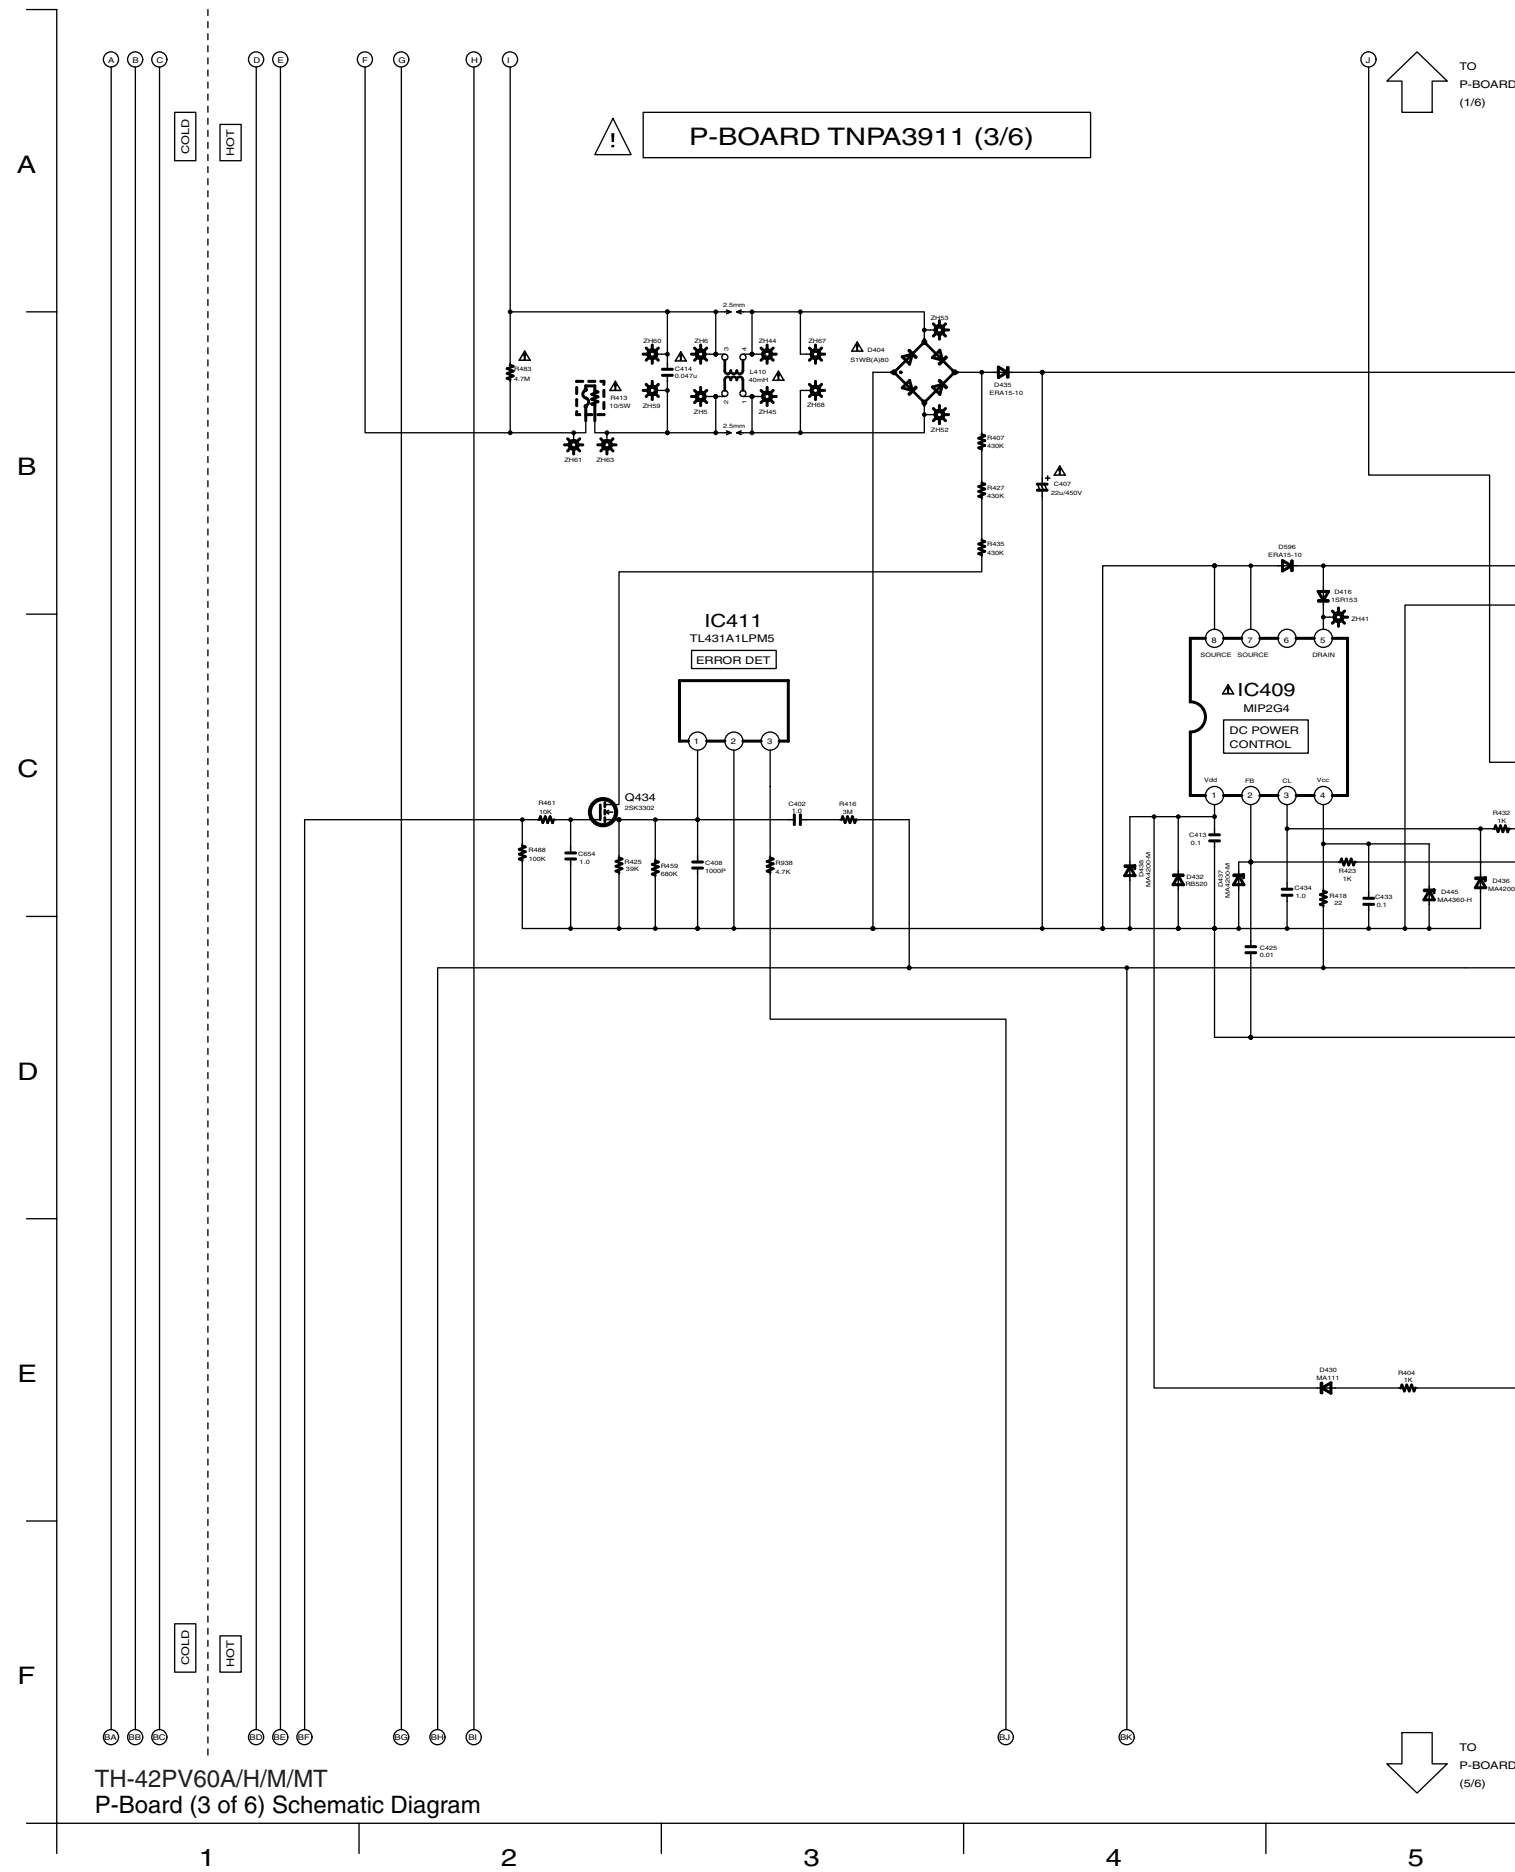


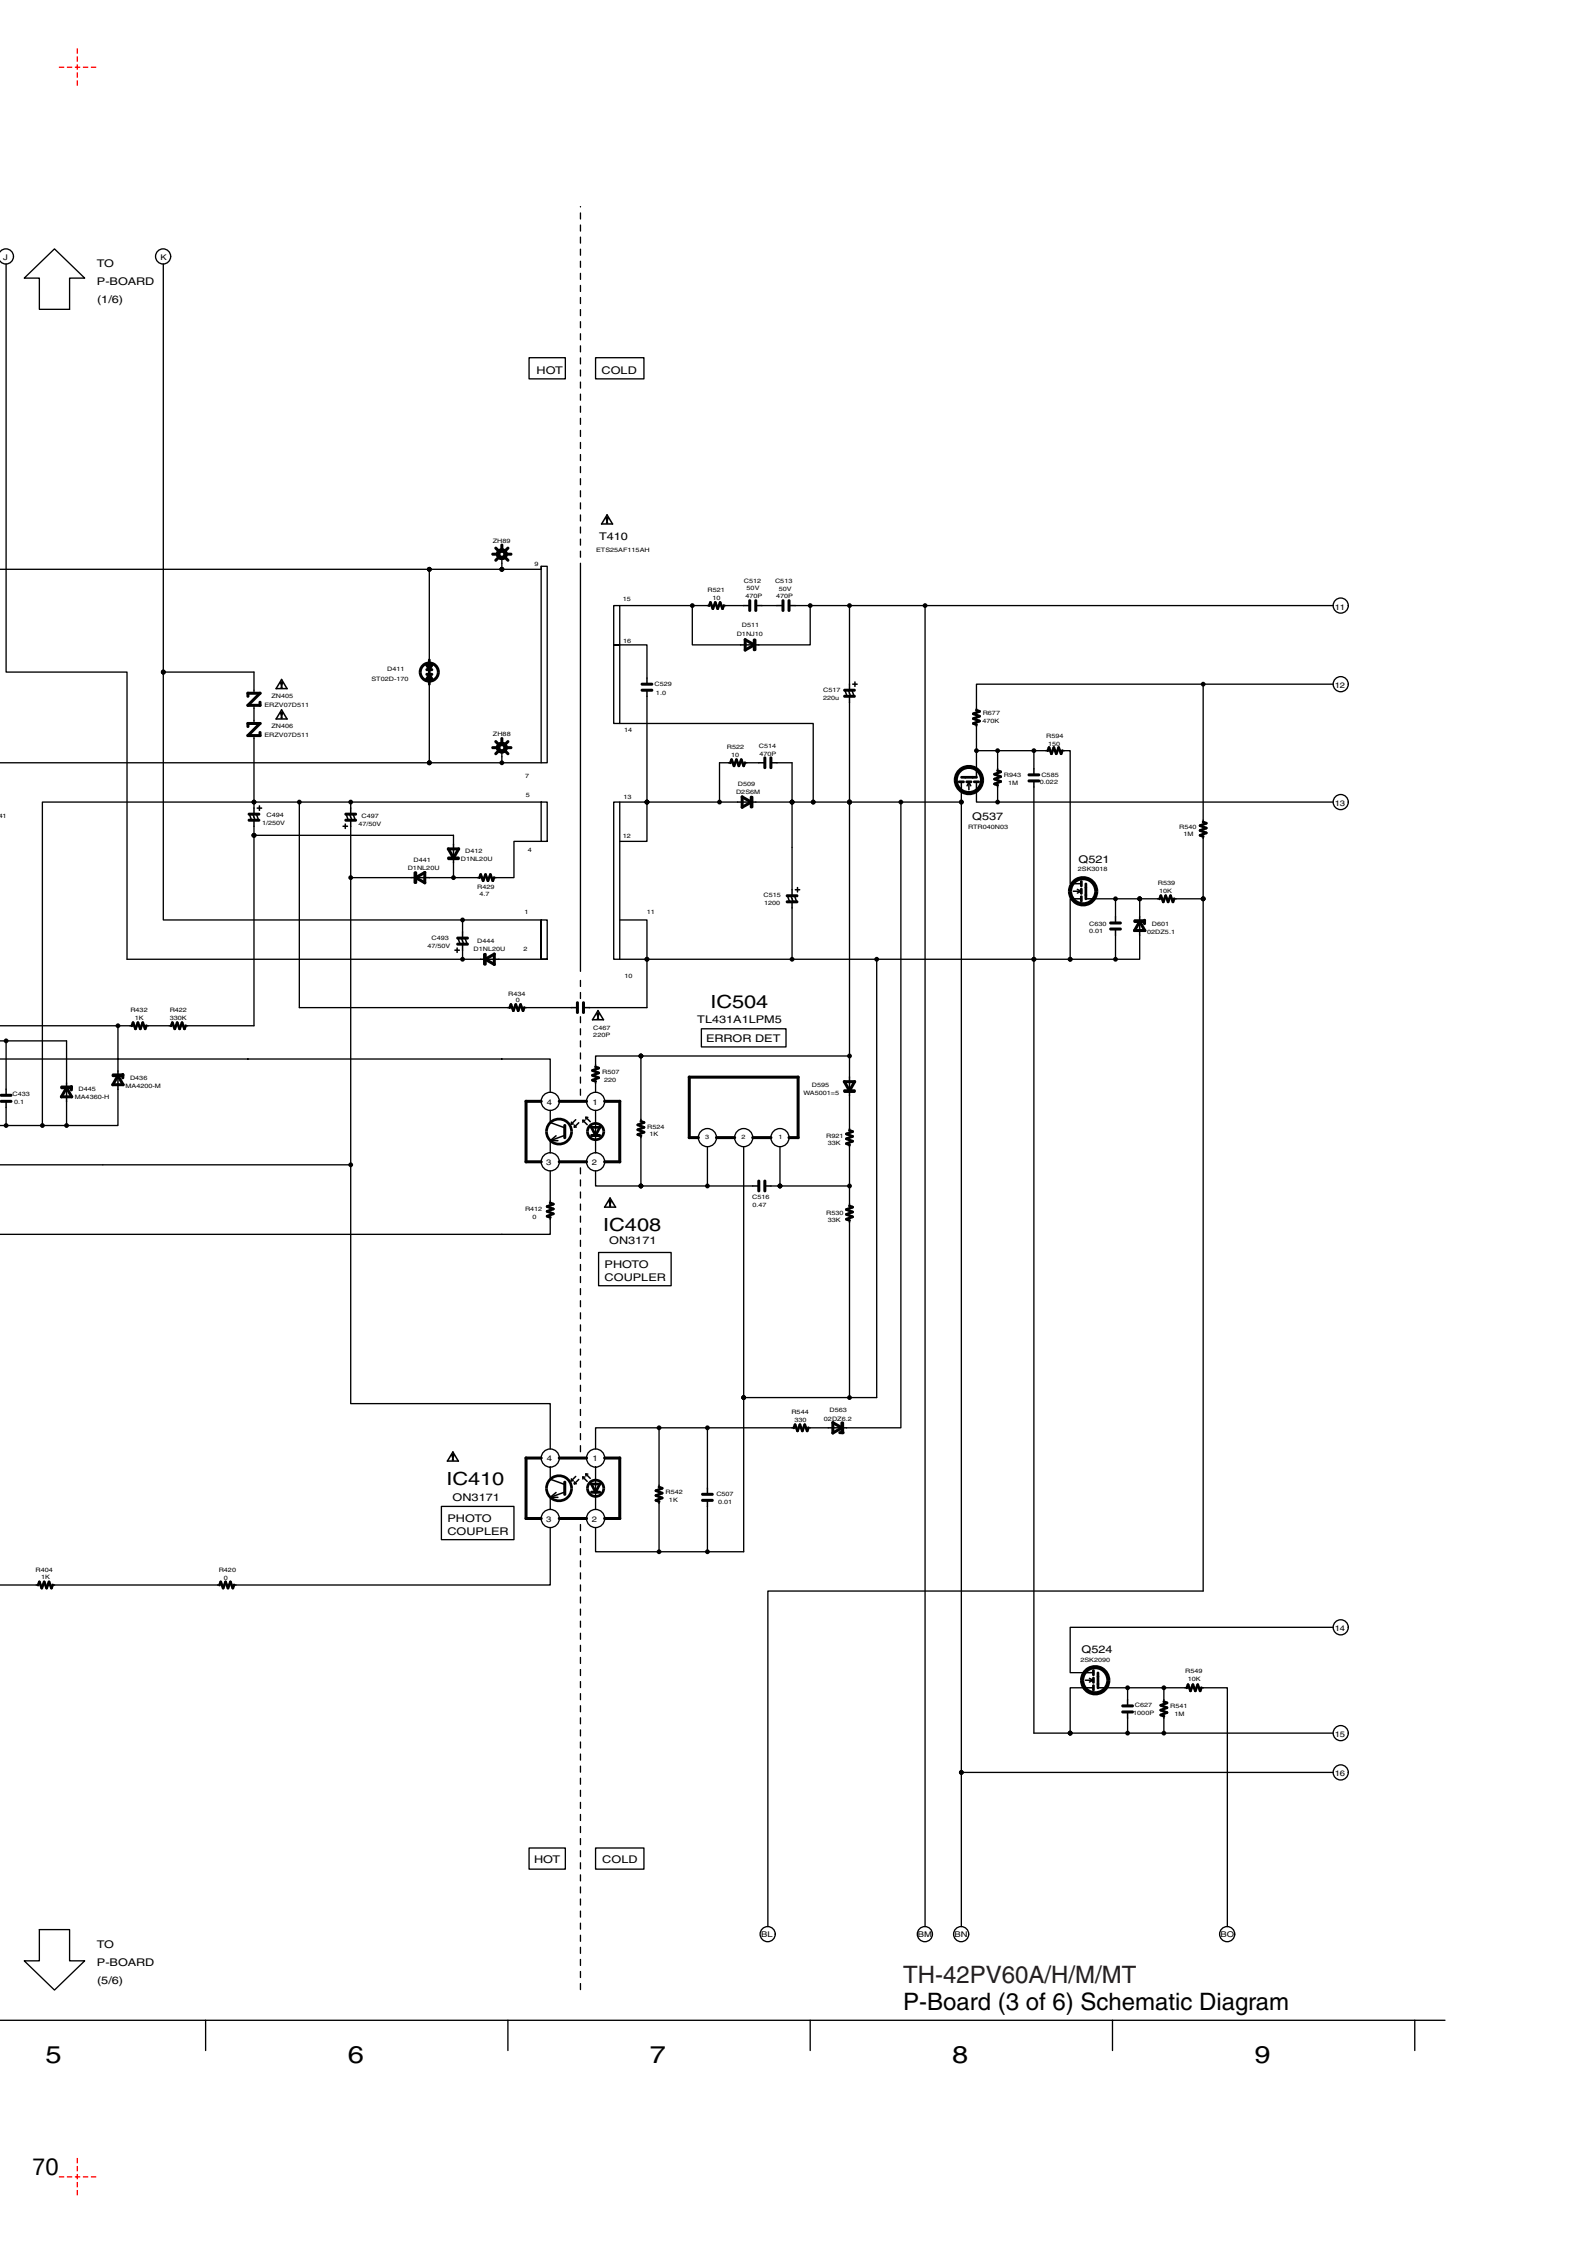





A horizontal timeline for the 2024-2025 Academic Year. The timeline is a horizontal line with vertical tick marks. Below the line, the years 10, 11, 12, 13, and 14 are labeled, corresponding to the five segments of the timeline.

14.8. P-Board (5 of 6) Schematic Diagram

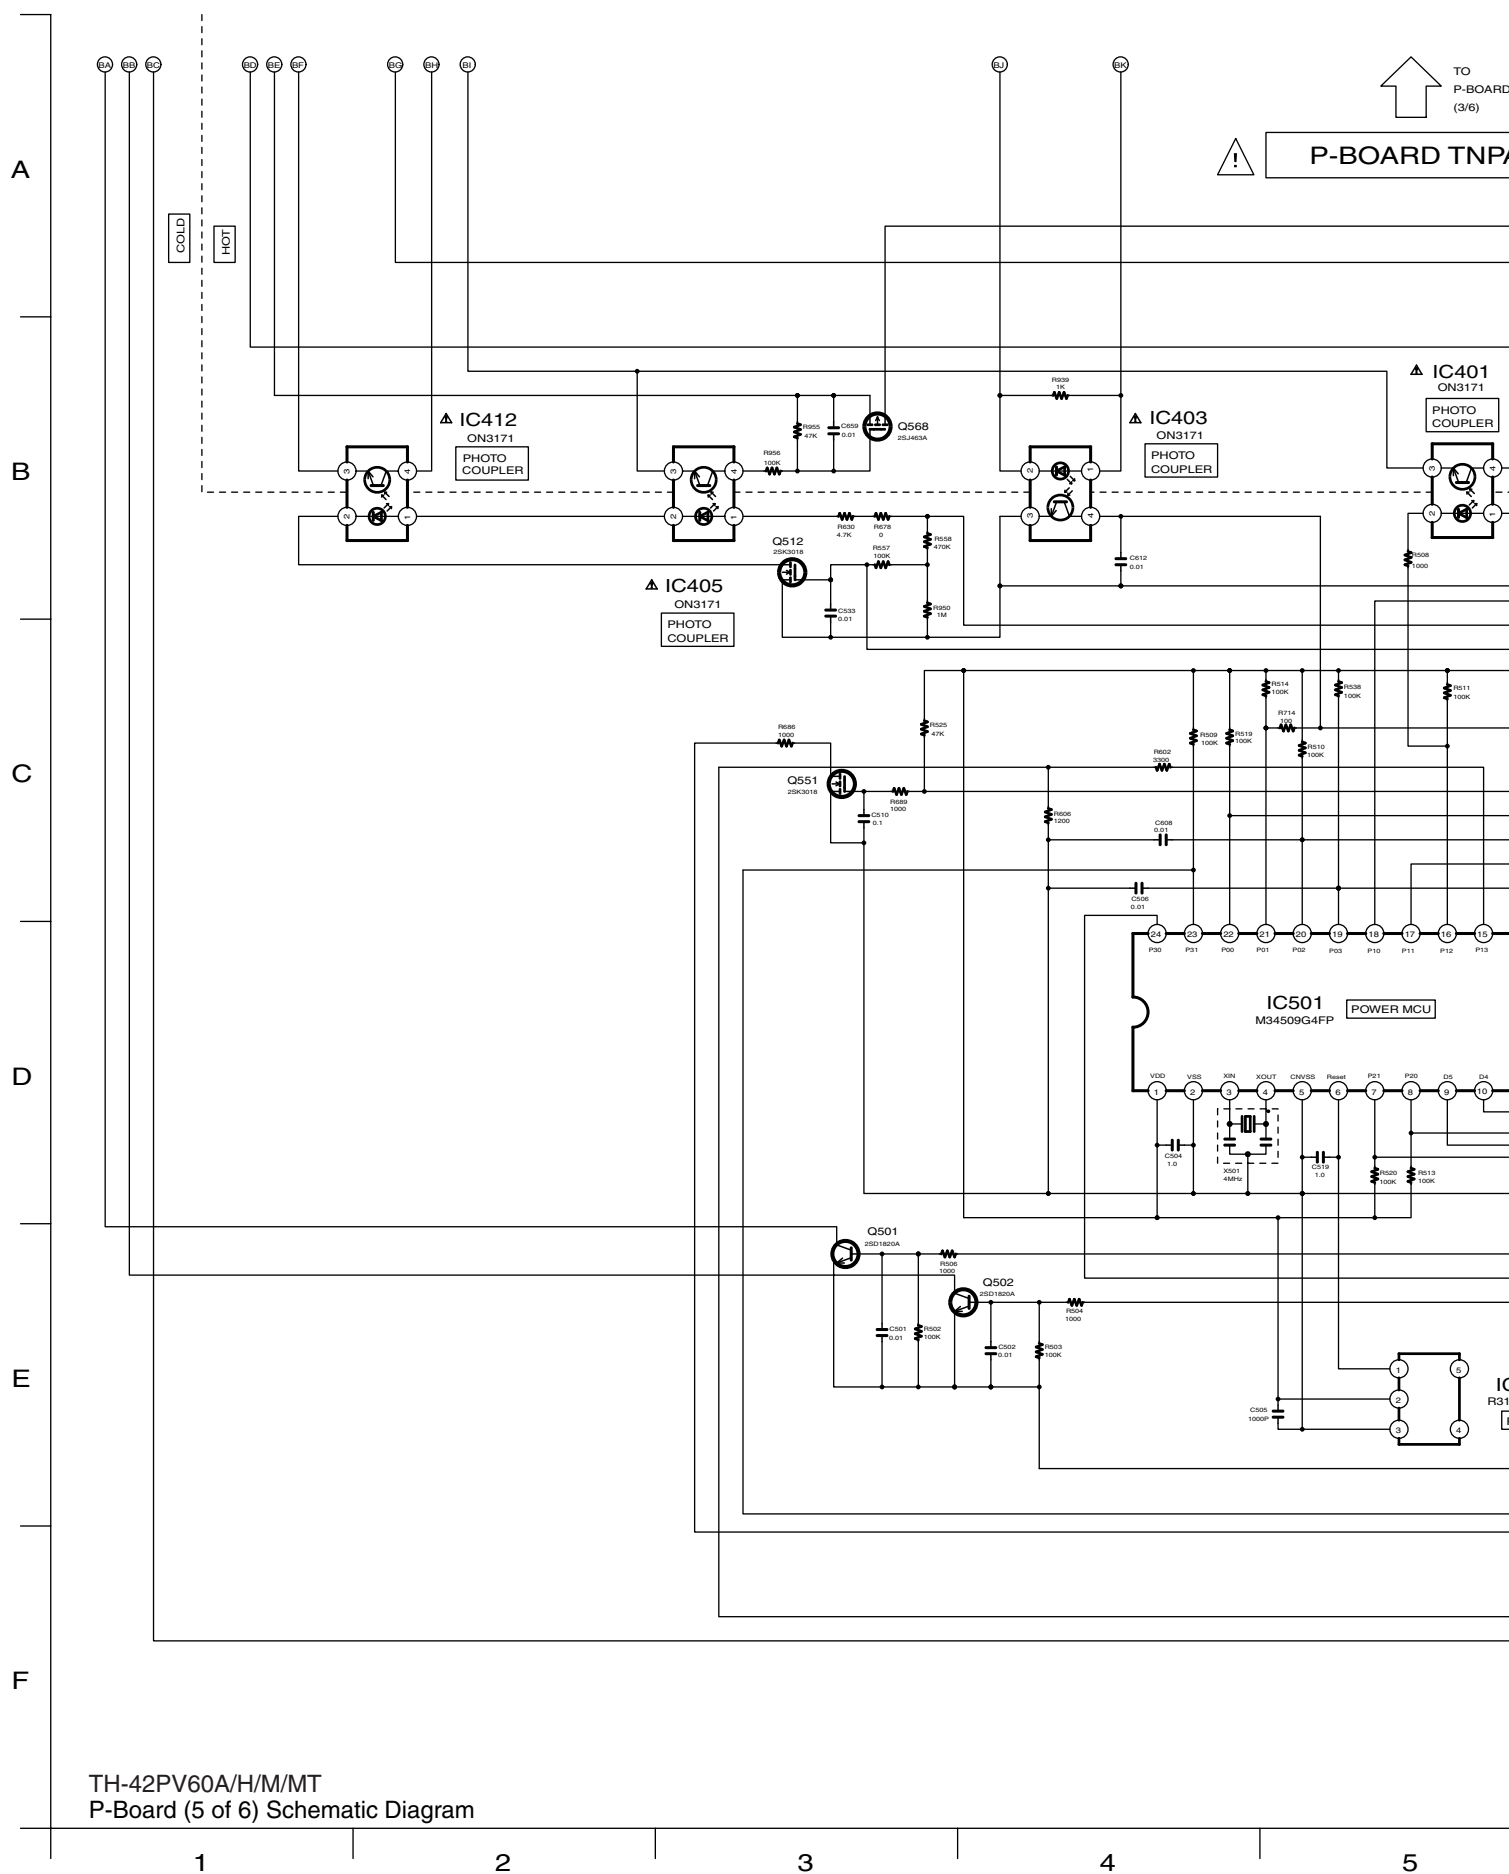



HOT | **COLD**

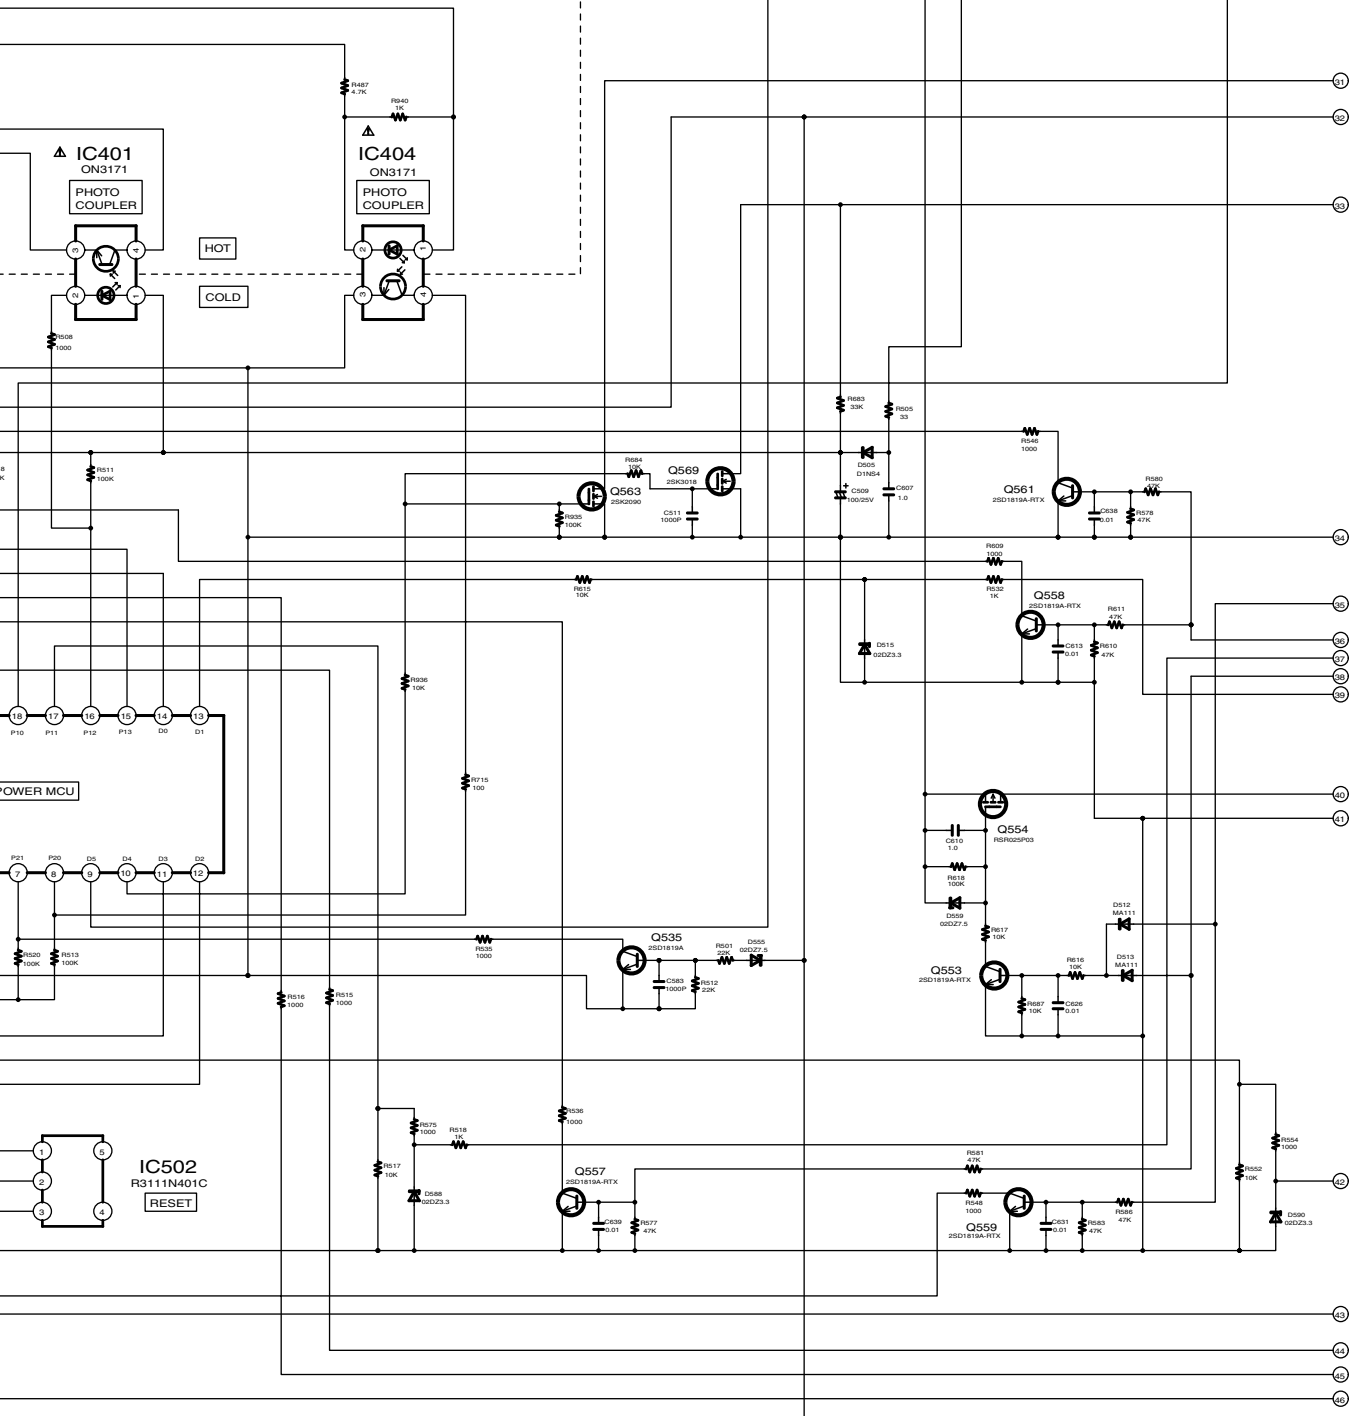

TH-42PV60A/H/M/MT
P-Board (5 of 6) Schematic Diagram



The timeline shows the progression of the 2012-2013 season from October to April. Key events include the start of the season in October, the peak in November, and the end of the season in April. The timeline is marked with months and years: 10, 11, 12, 13, 14.



↑
TO
P-BOARD
(4/6)


IC510
BD9703FP
SWITCHING
REGULATOR

R0559
20K
R0559
8.2K


TH-42PV60A/H/M/MT
P-Board (6 of 6) Schematic Diagram

14 15 16 17 18

14.10. PA-Board Block Diagram

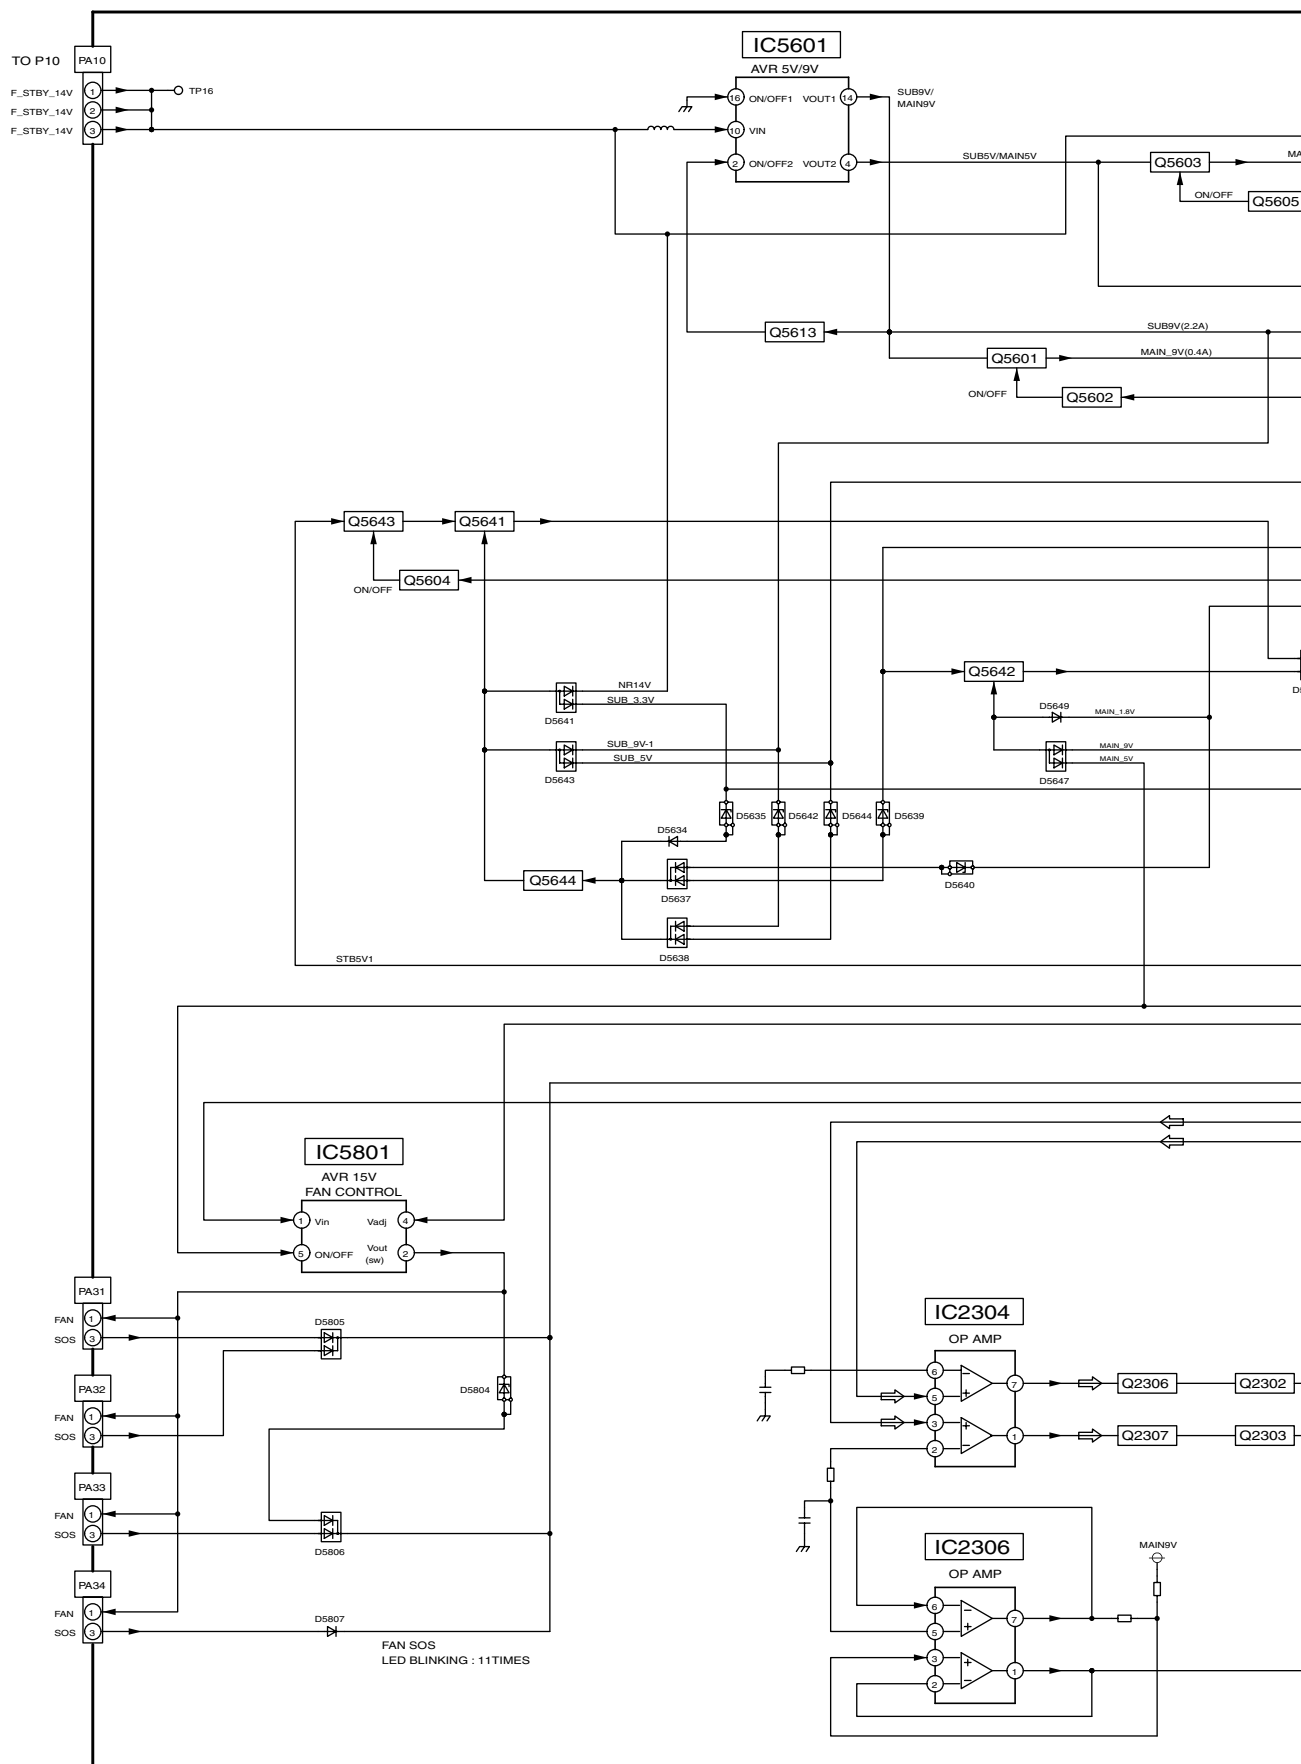


TH-42PV60A/H/M/MT
PA-Board Block Diagram

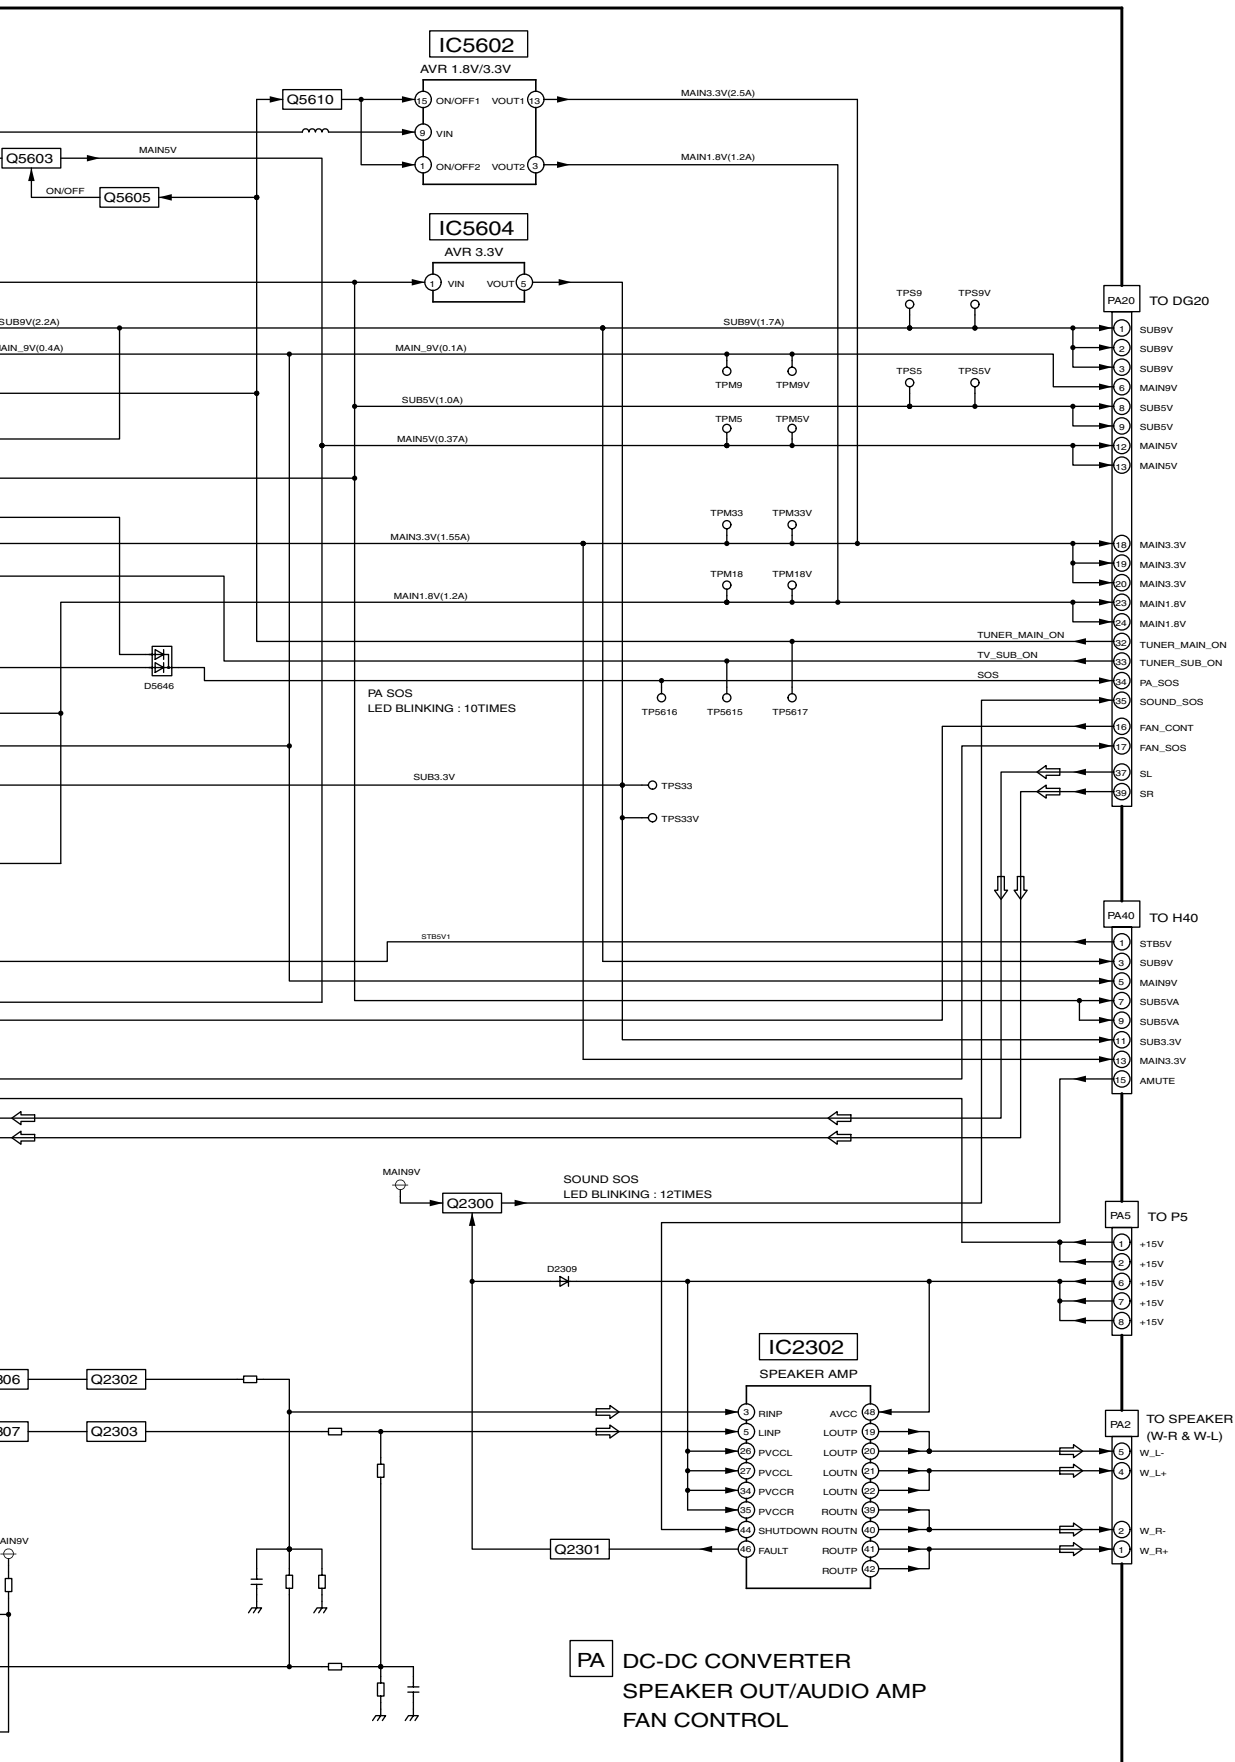

TH-42PV60A/H/M/MT
PA-Board Block Diagram



TO
P-BOARD
(P10)

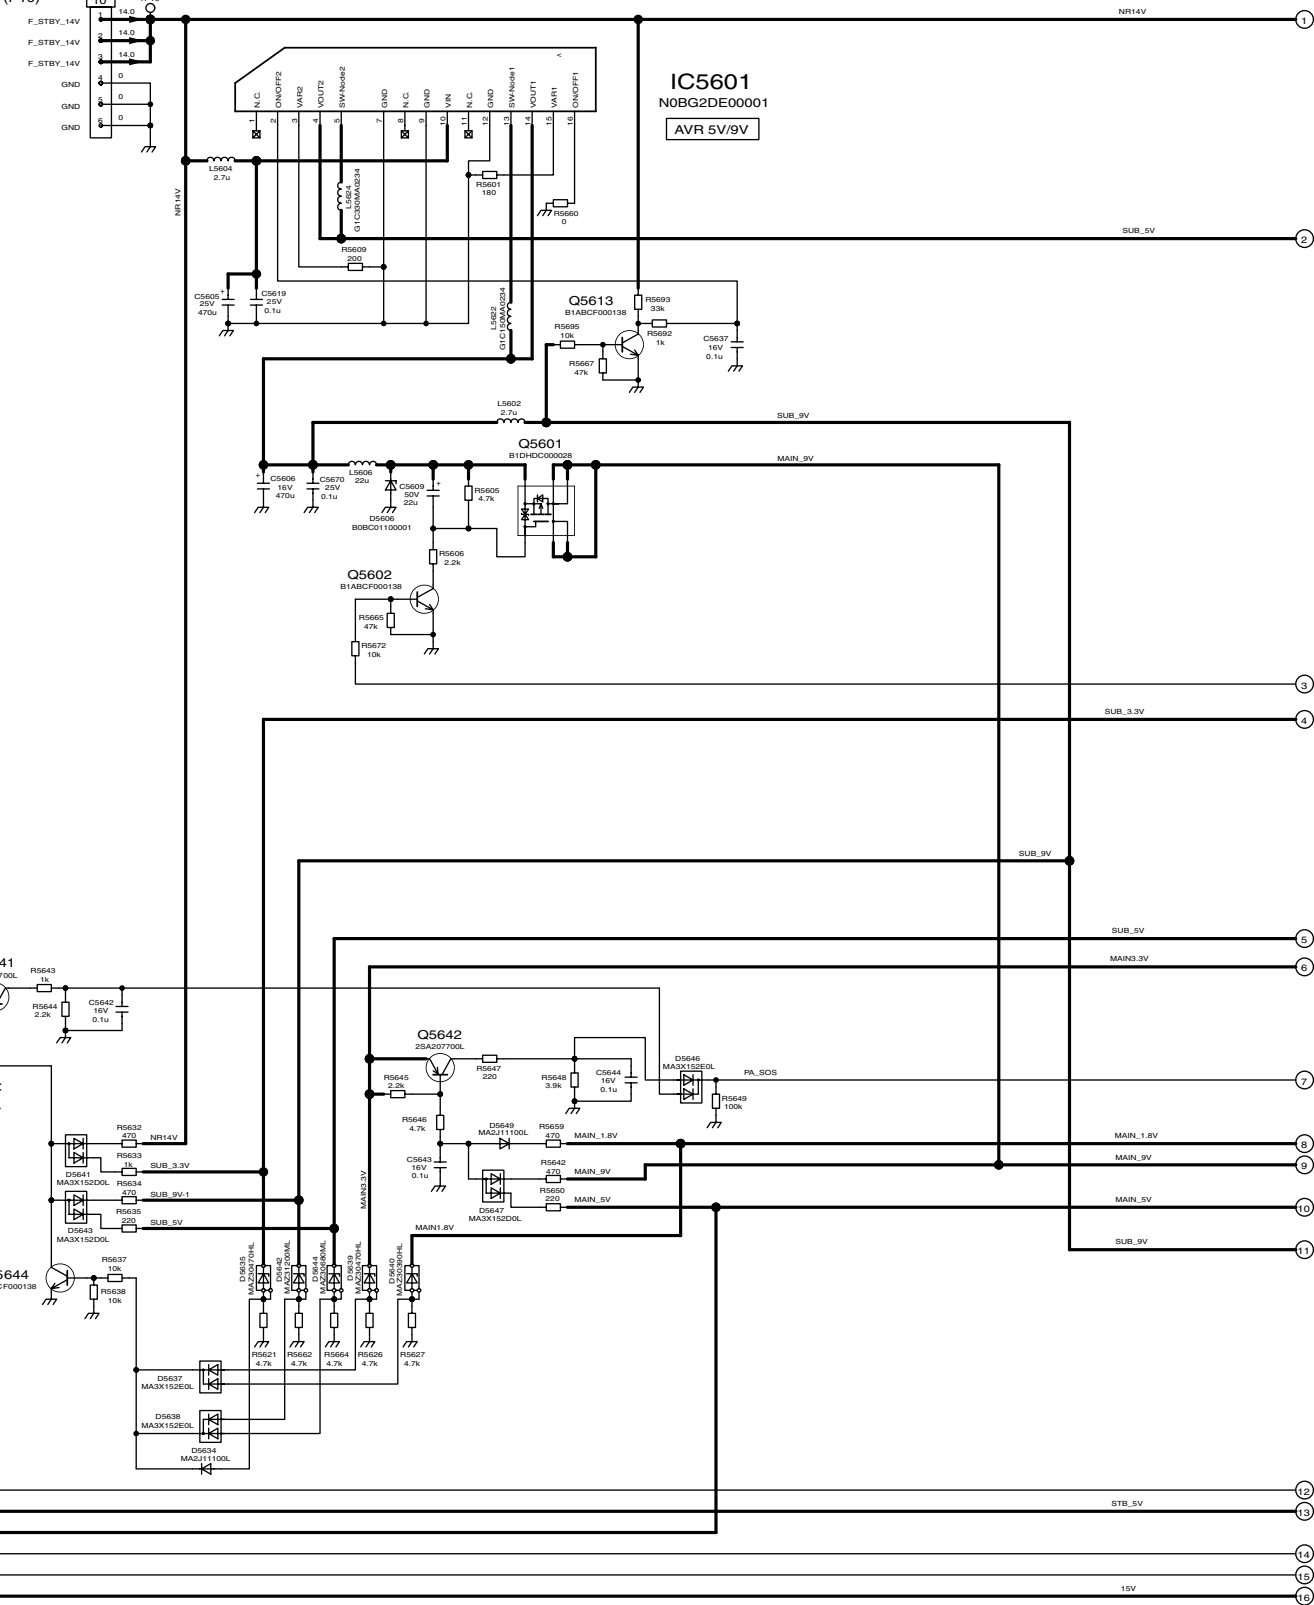

TH-42PV60A/H/M/MT
PA-Board (1 of 3) Schematic Diagram

4

5

6


7

8




12

PA-BOARD TNPA3761AC (2/3)




IC5604
C0DBZGC00067

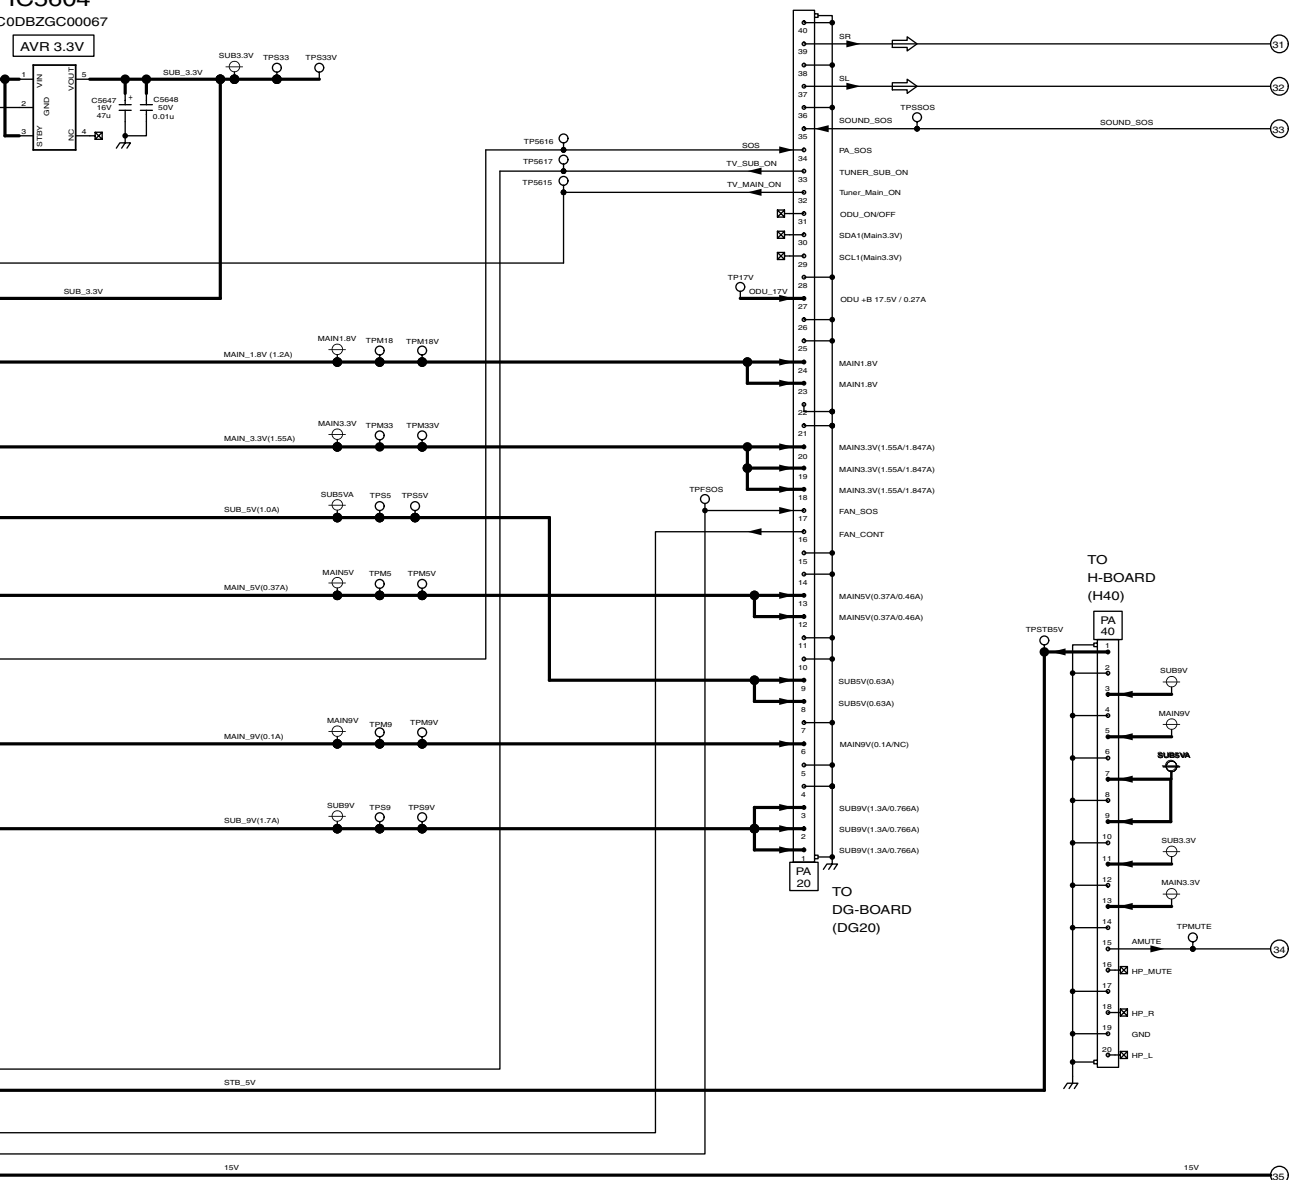

TH-42PV60A/H/M/MT
PA-Board (2 of 3) Schematic Diagram

14.13. PA-Board (3 of 3) Schematic Diagram

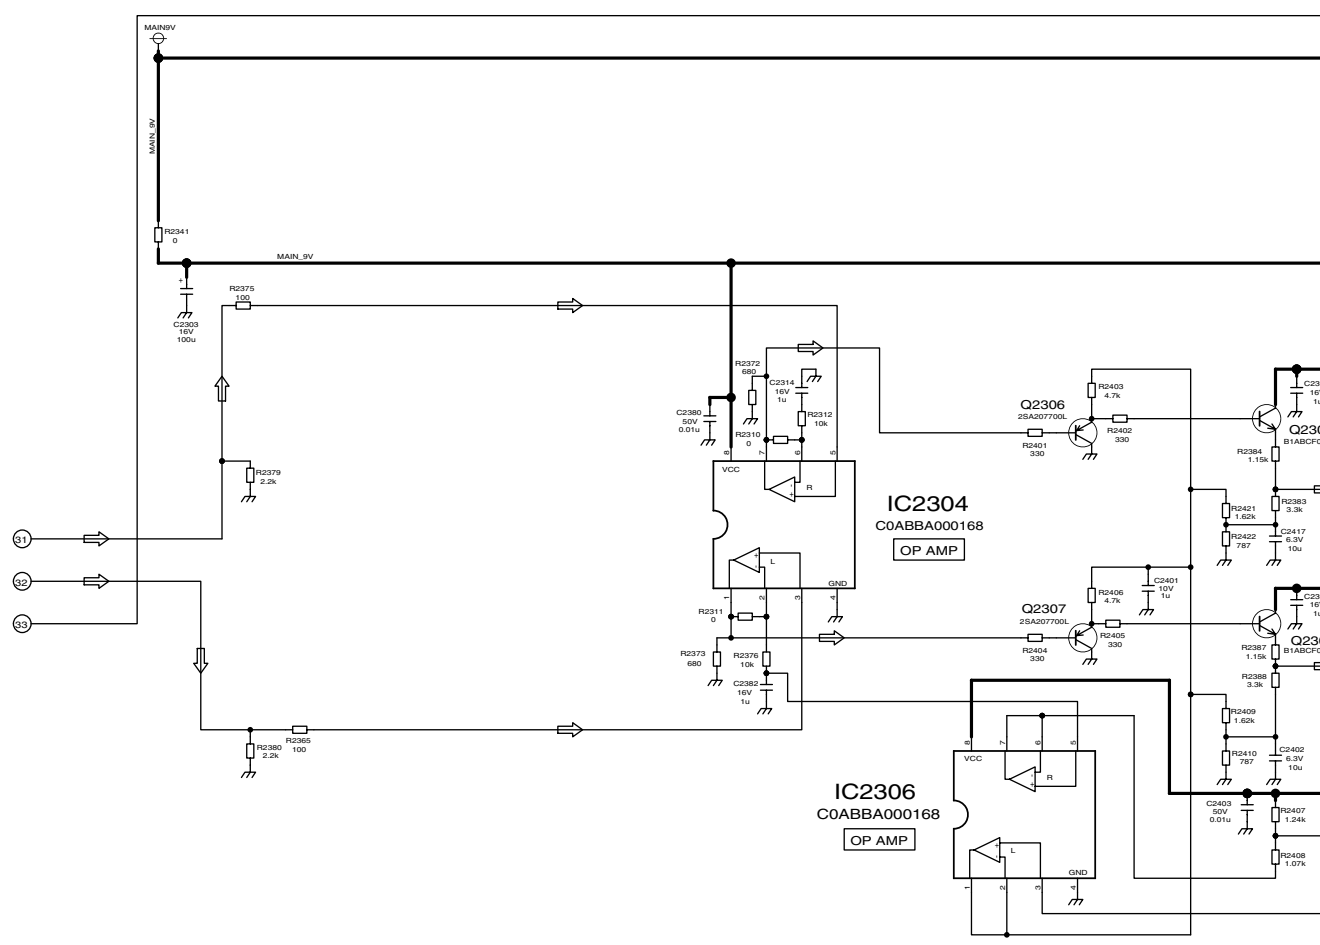

PA-BOARD TNPA3761AC (3/3)

34

35


TH-42PV60A/H/M/MT
PA-Board (3 of 3) Schematic Diagram

16

17

18


19

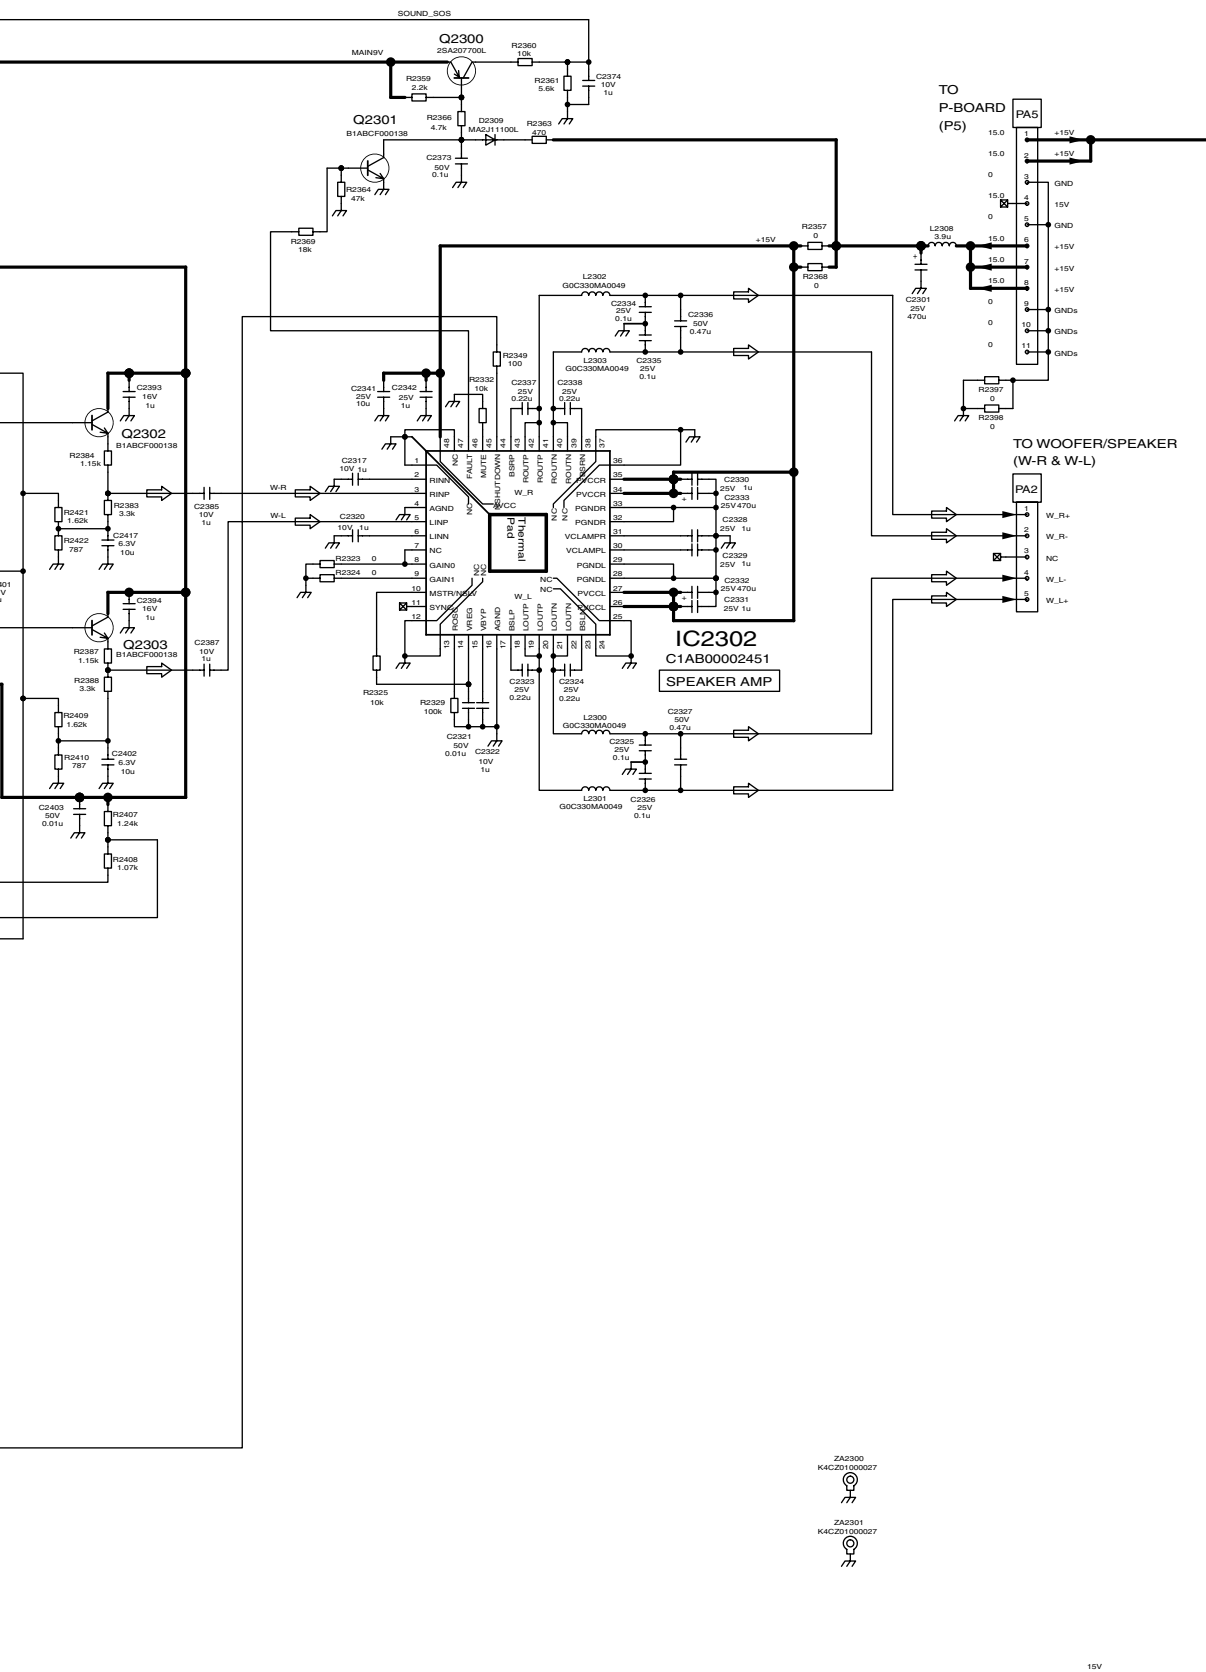

TH-42PV60A/H/M/MT
PA-Board (3 of 3) Schematic Diagram




TH-42PV60A/H/M/MT H and TA-Board Block Diagram

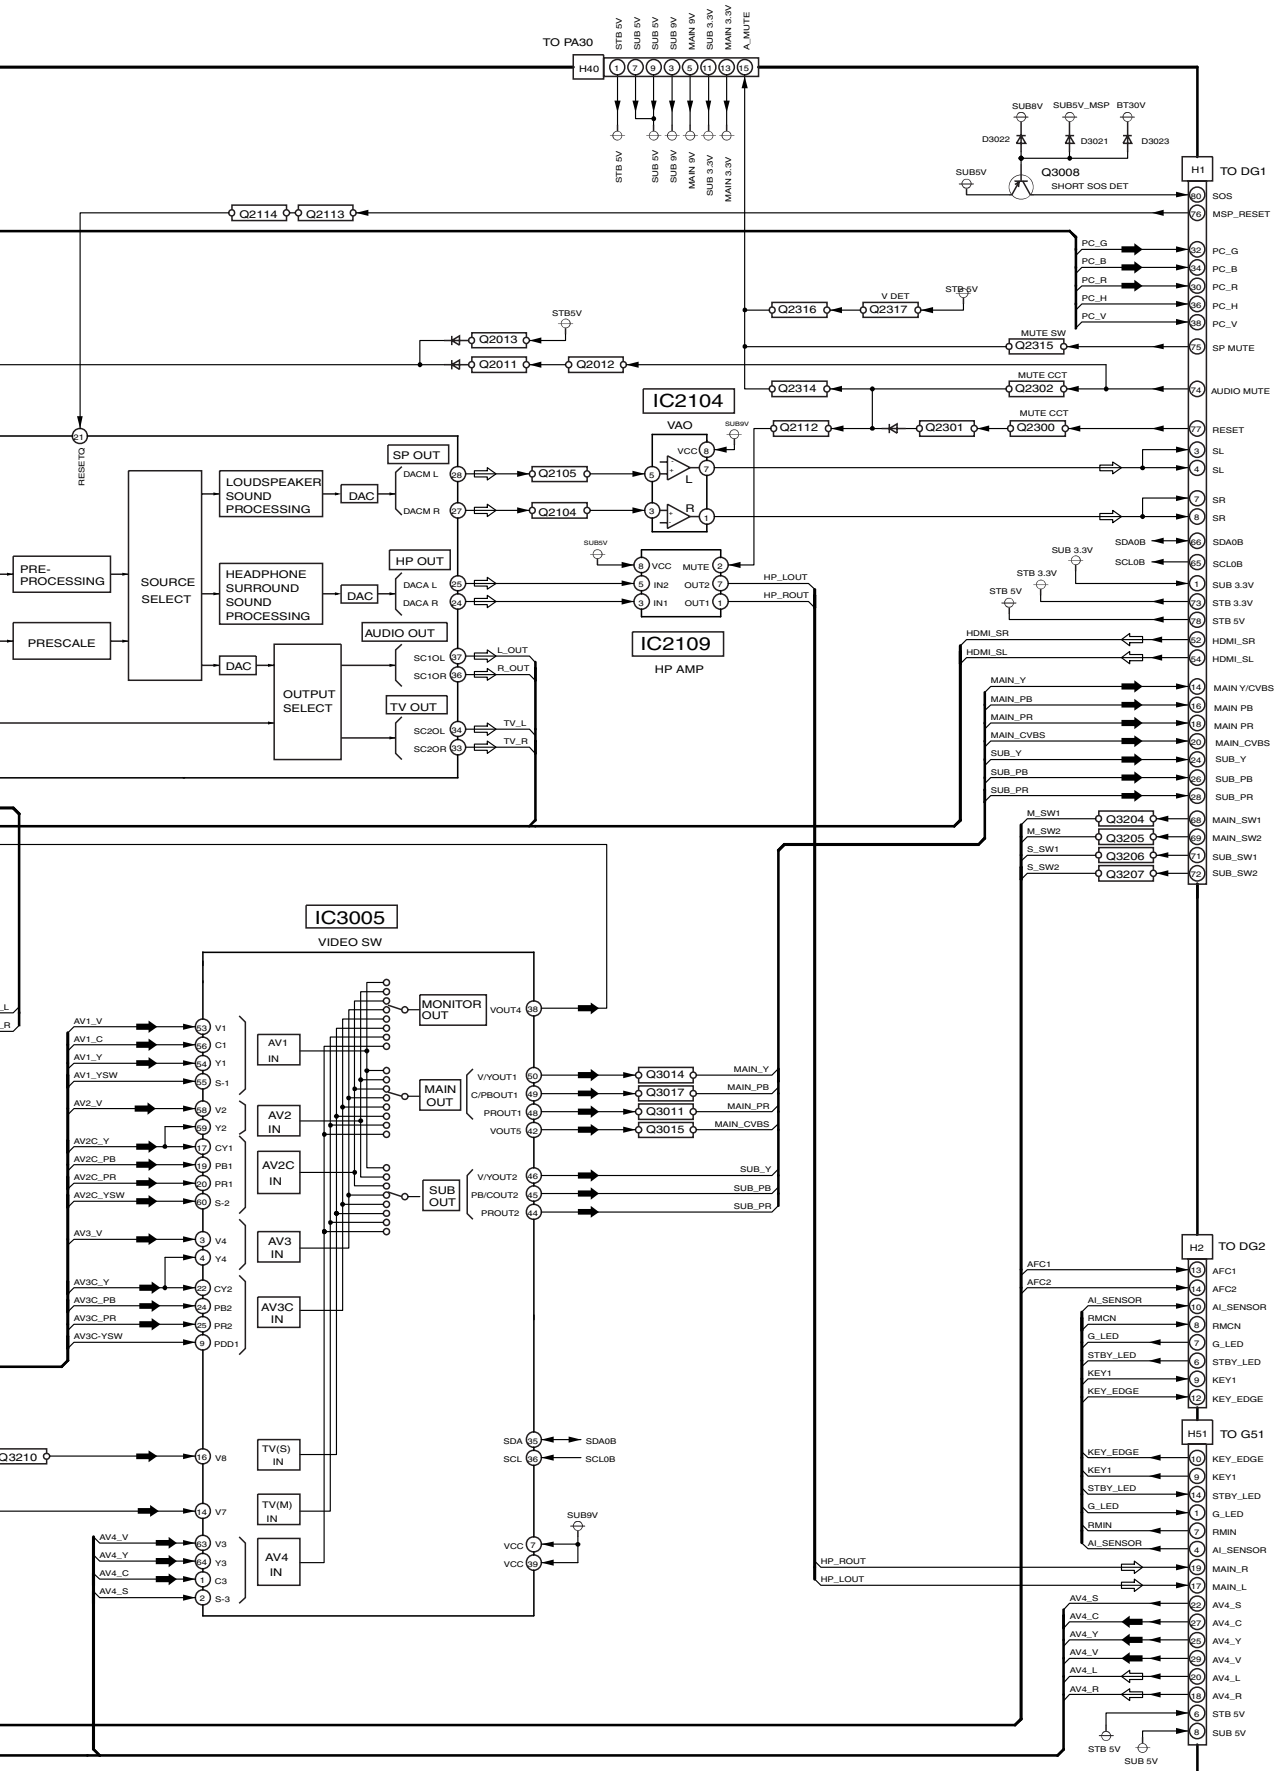


TH-42PV60A/H/M/MT H and TA-Board Block Diagram

14.15. G, GK, HC and K-Board Block Diagram


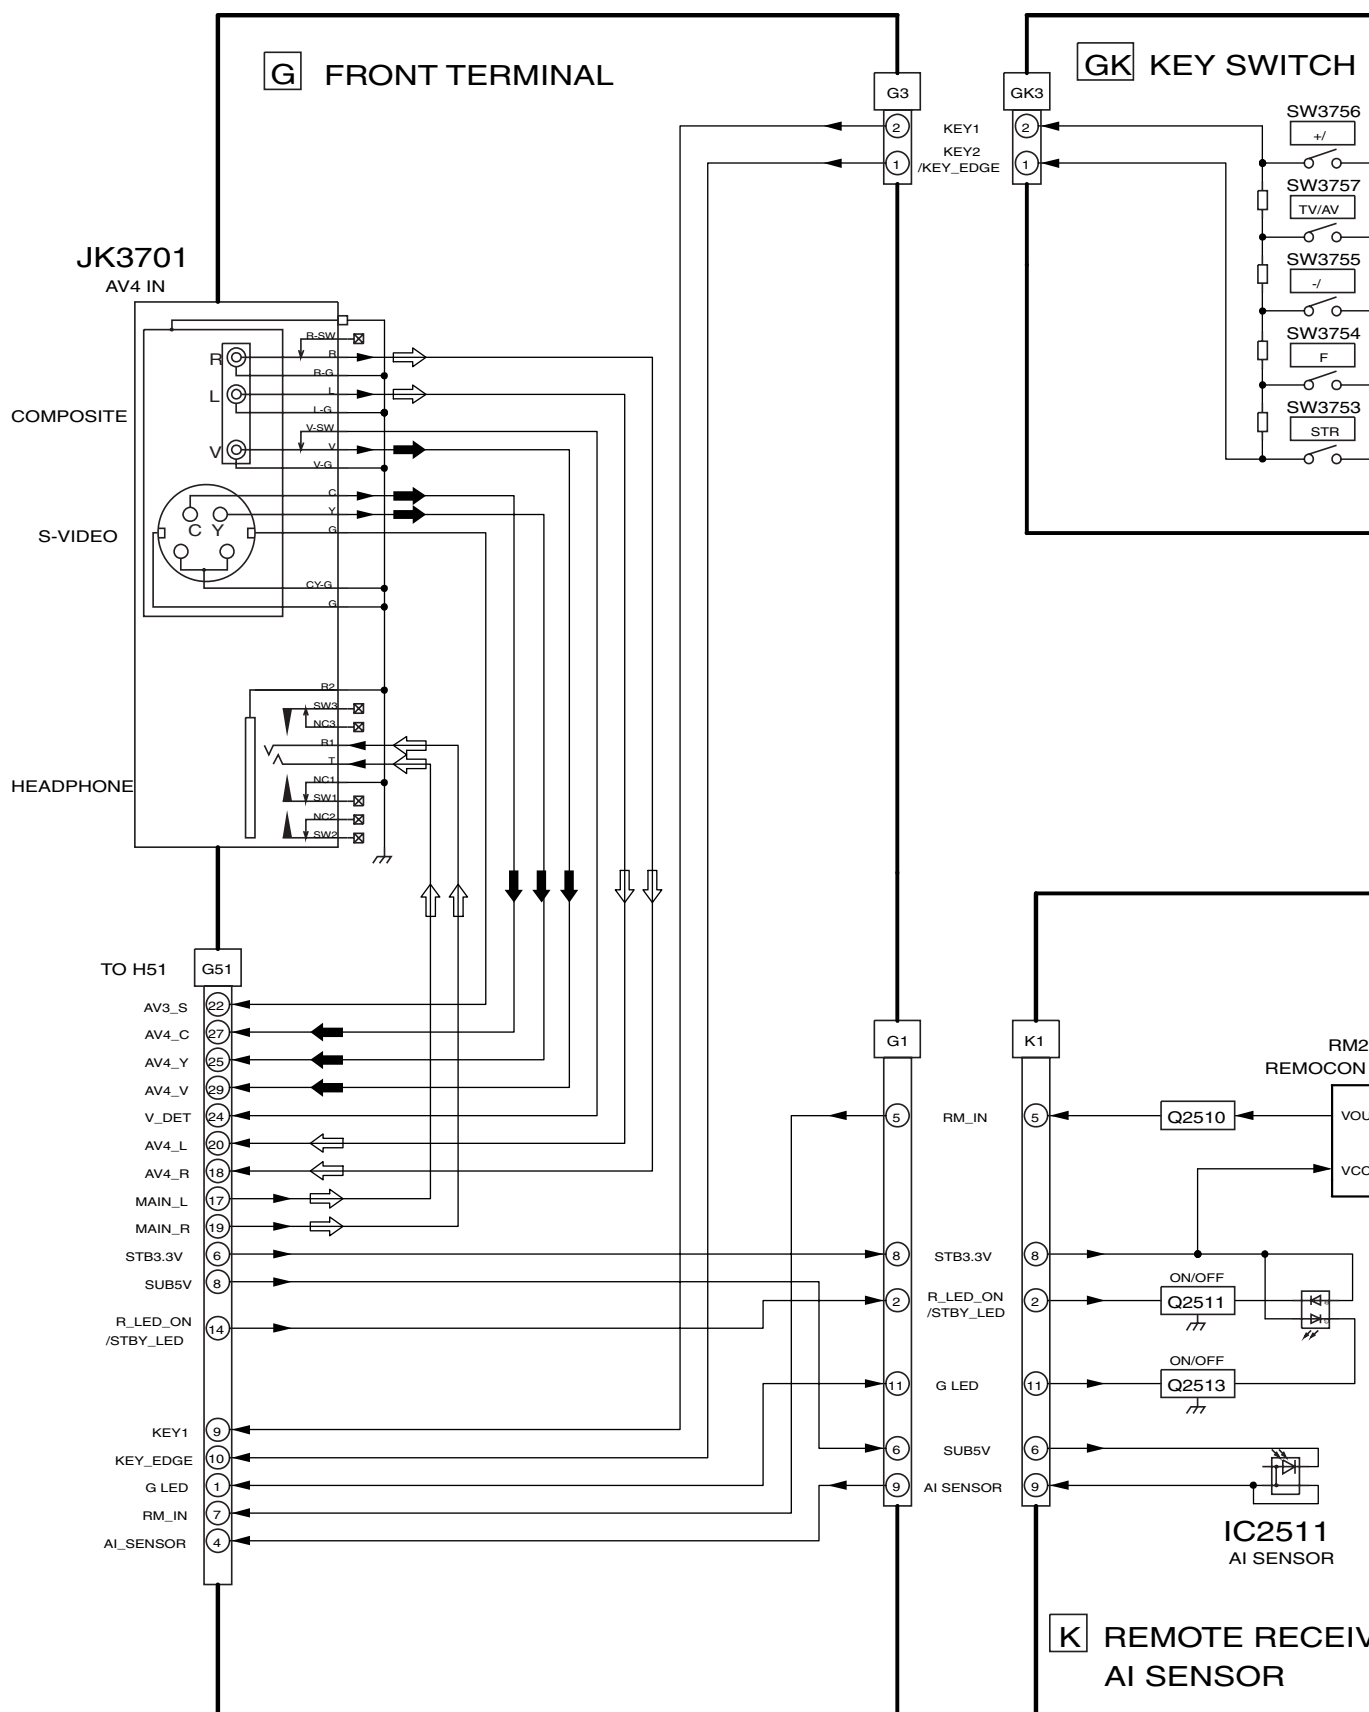


TH-42PV60A/H/M/MT
 G, GK, K, nad HC-Board Block Diagram

SWITCH

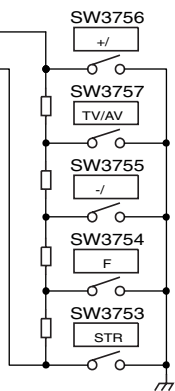


RM2501 REMOCON RECEIVER




IC2511 AI SENSOR

TE RECEIVER/LED SENSOR

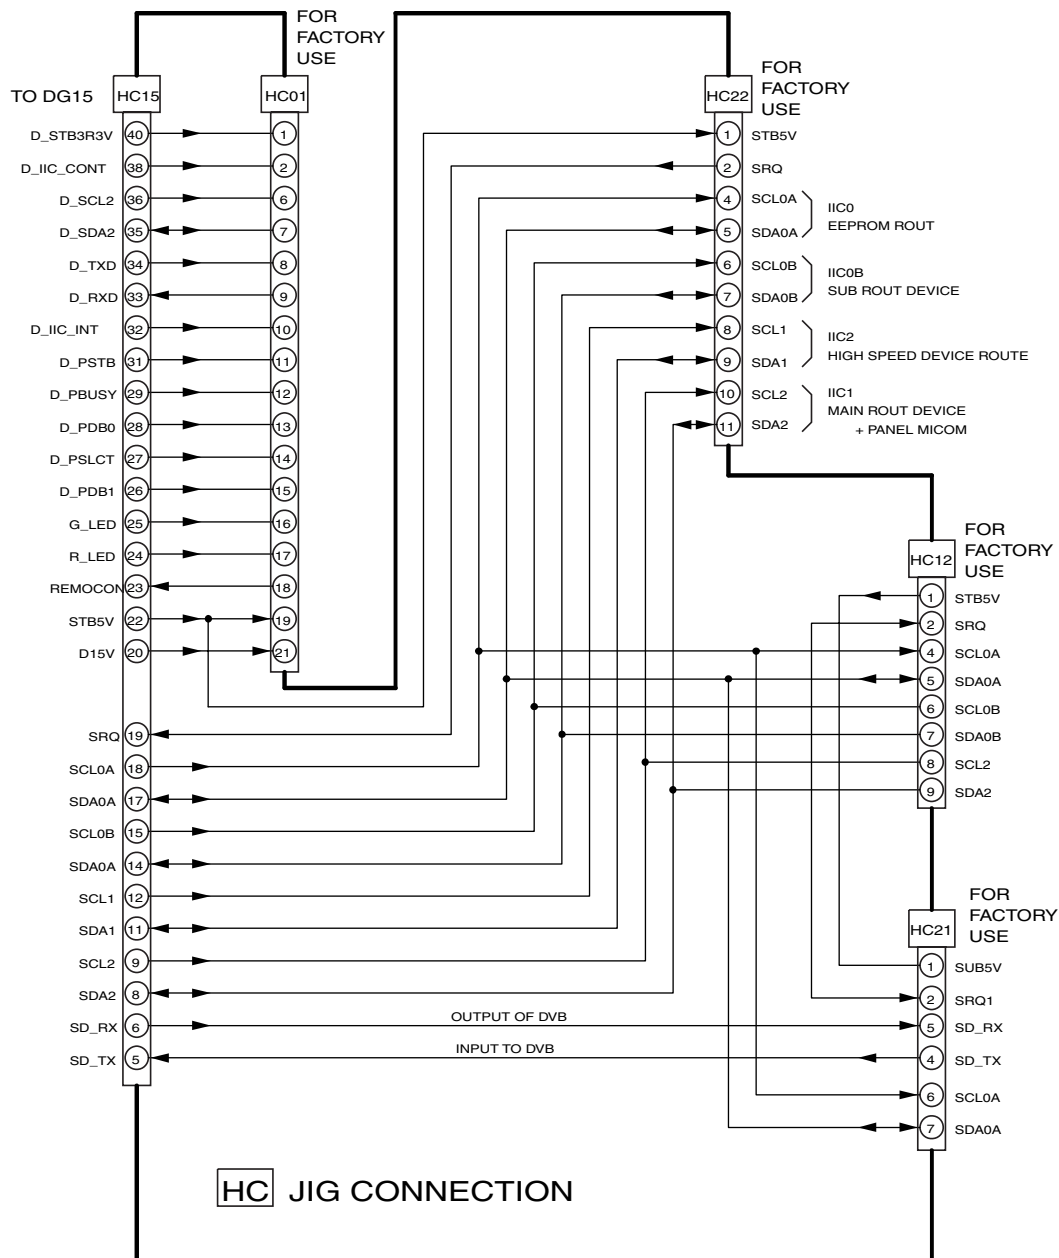

TH-42PV60A/H/M/MT
G, GK, K, and HC-Board Block Diagram









3
4
5
6






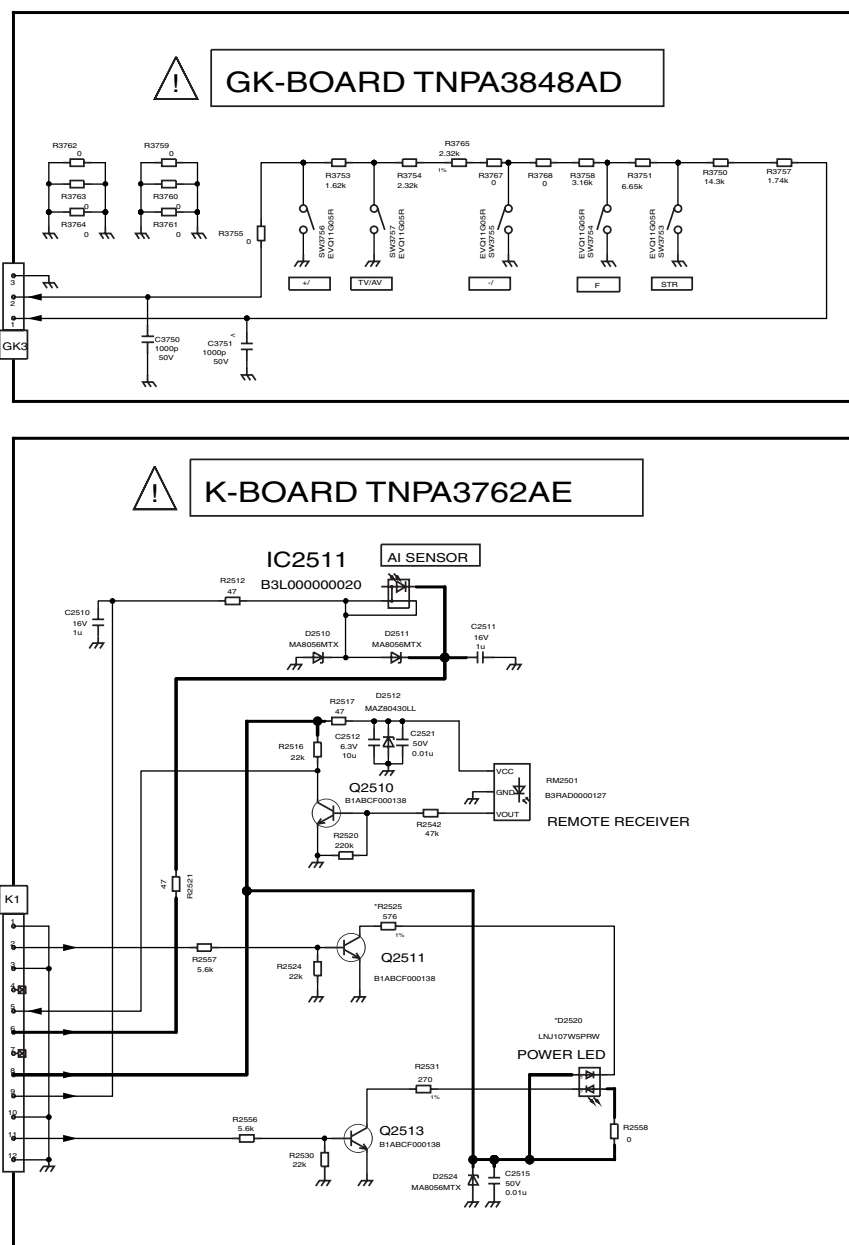




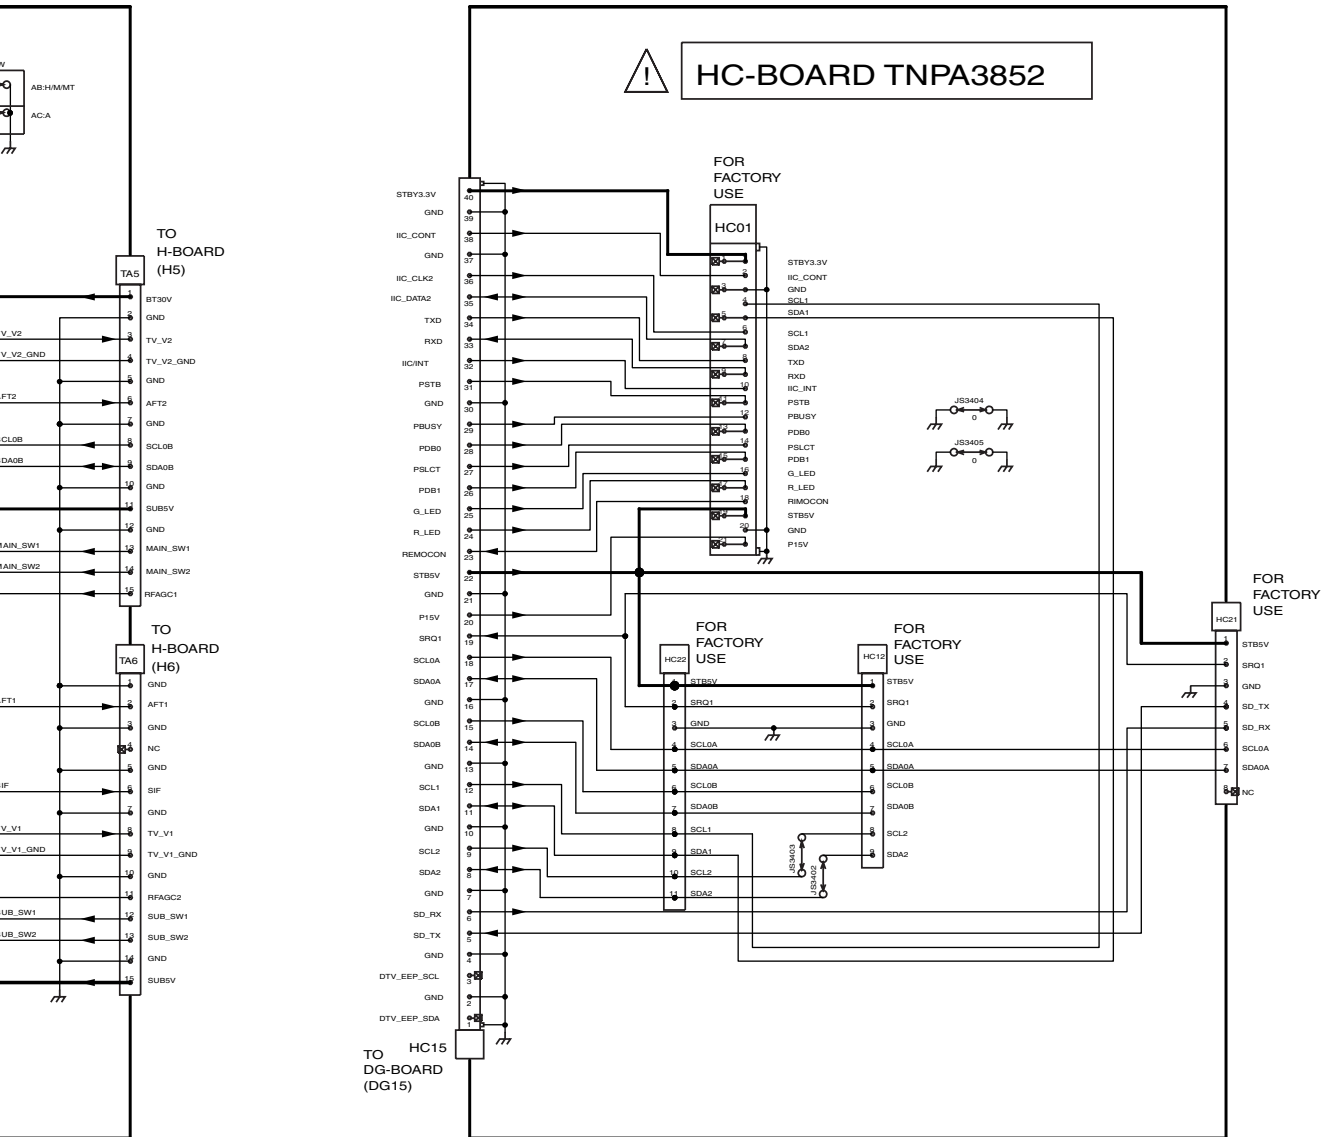




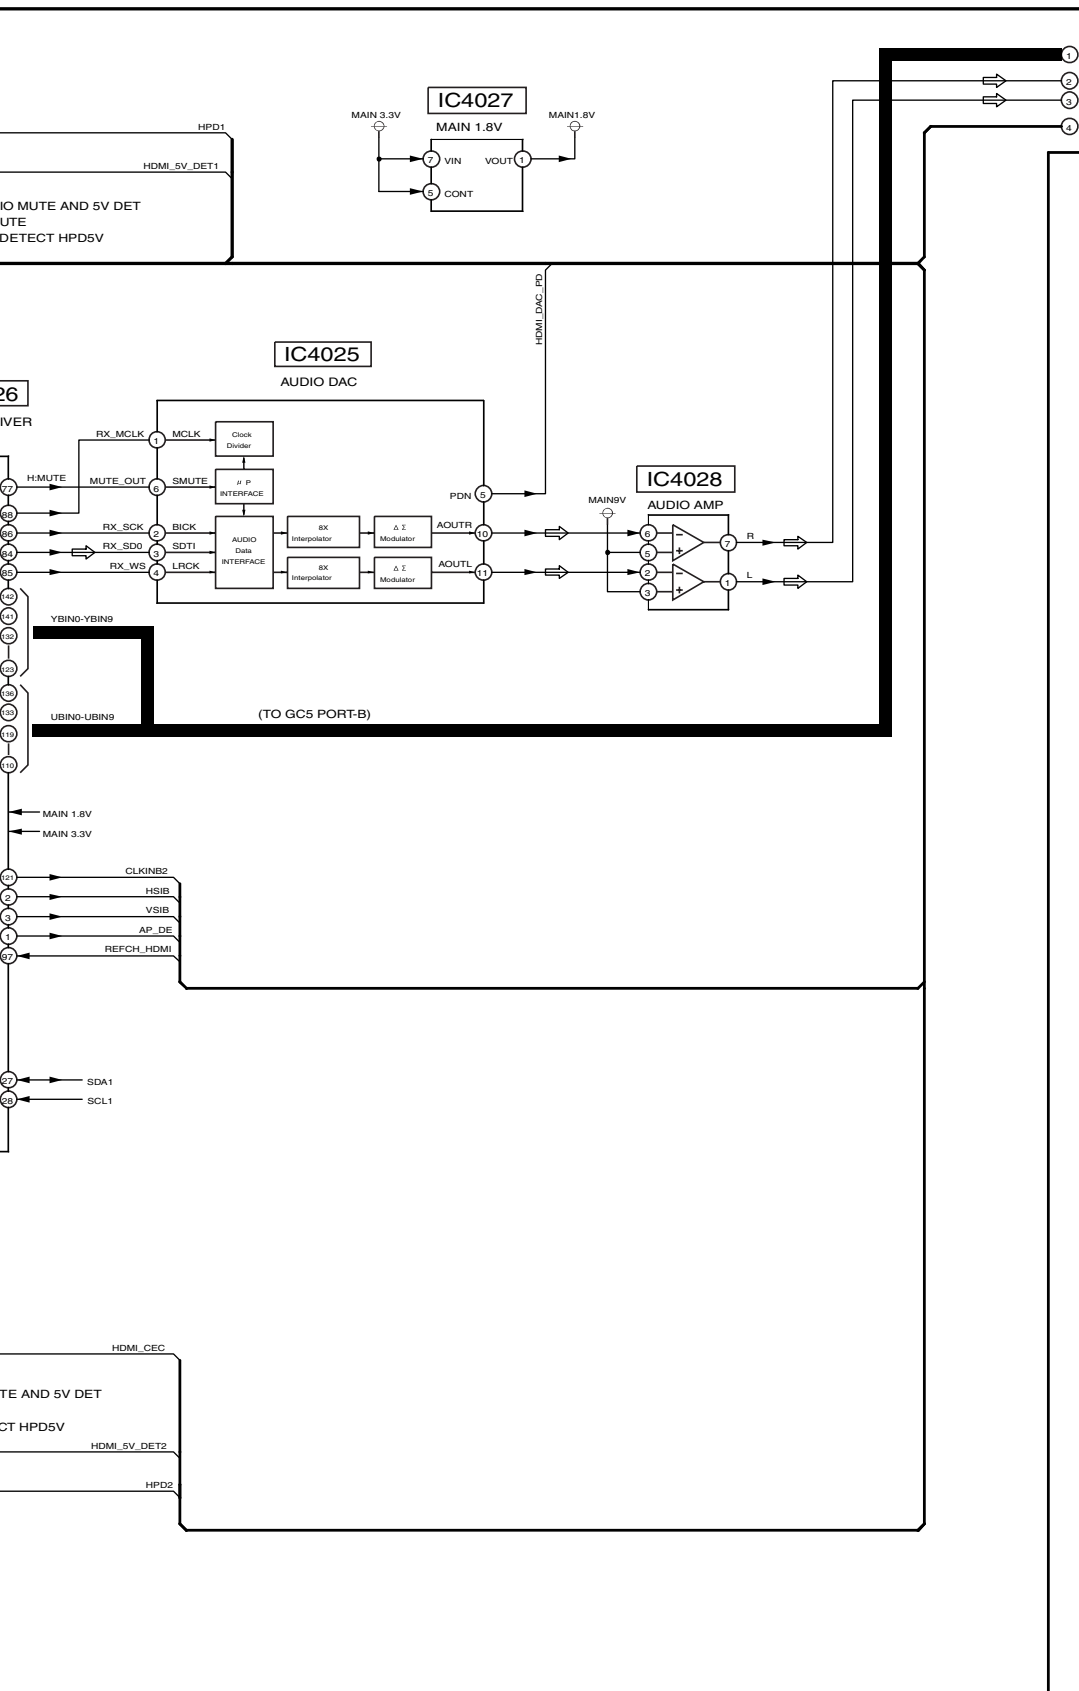

TH-42PV60A/H/M/MT
DG-Board (1 of 3) Block Diagram




86

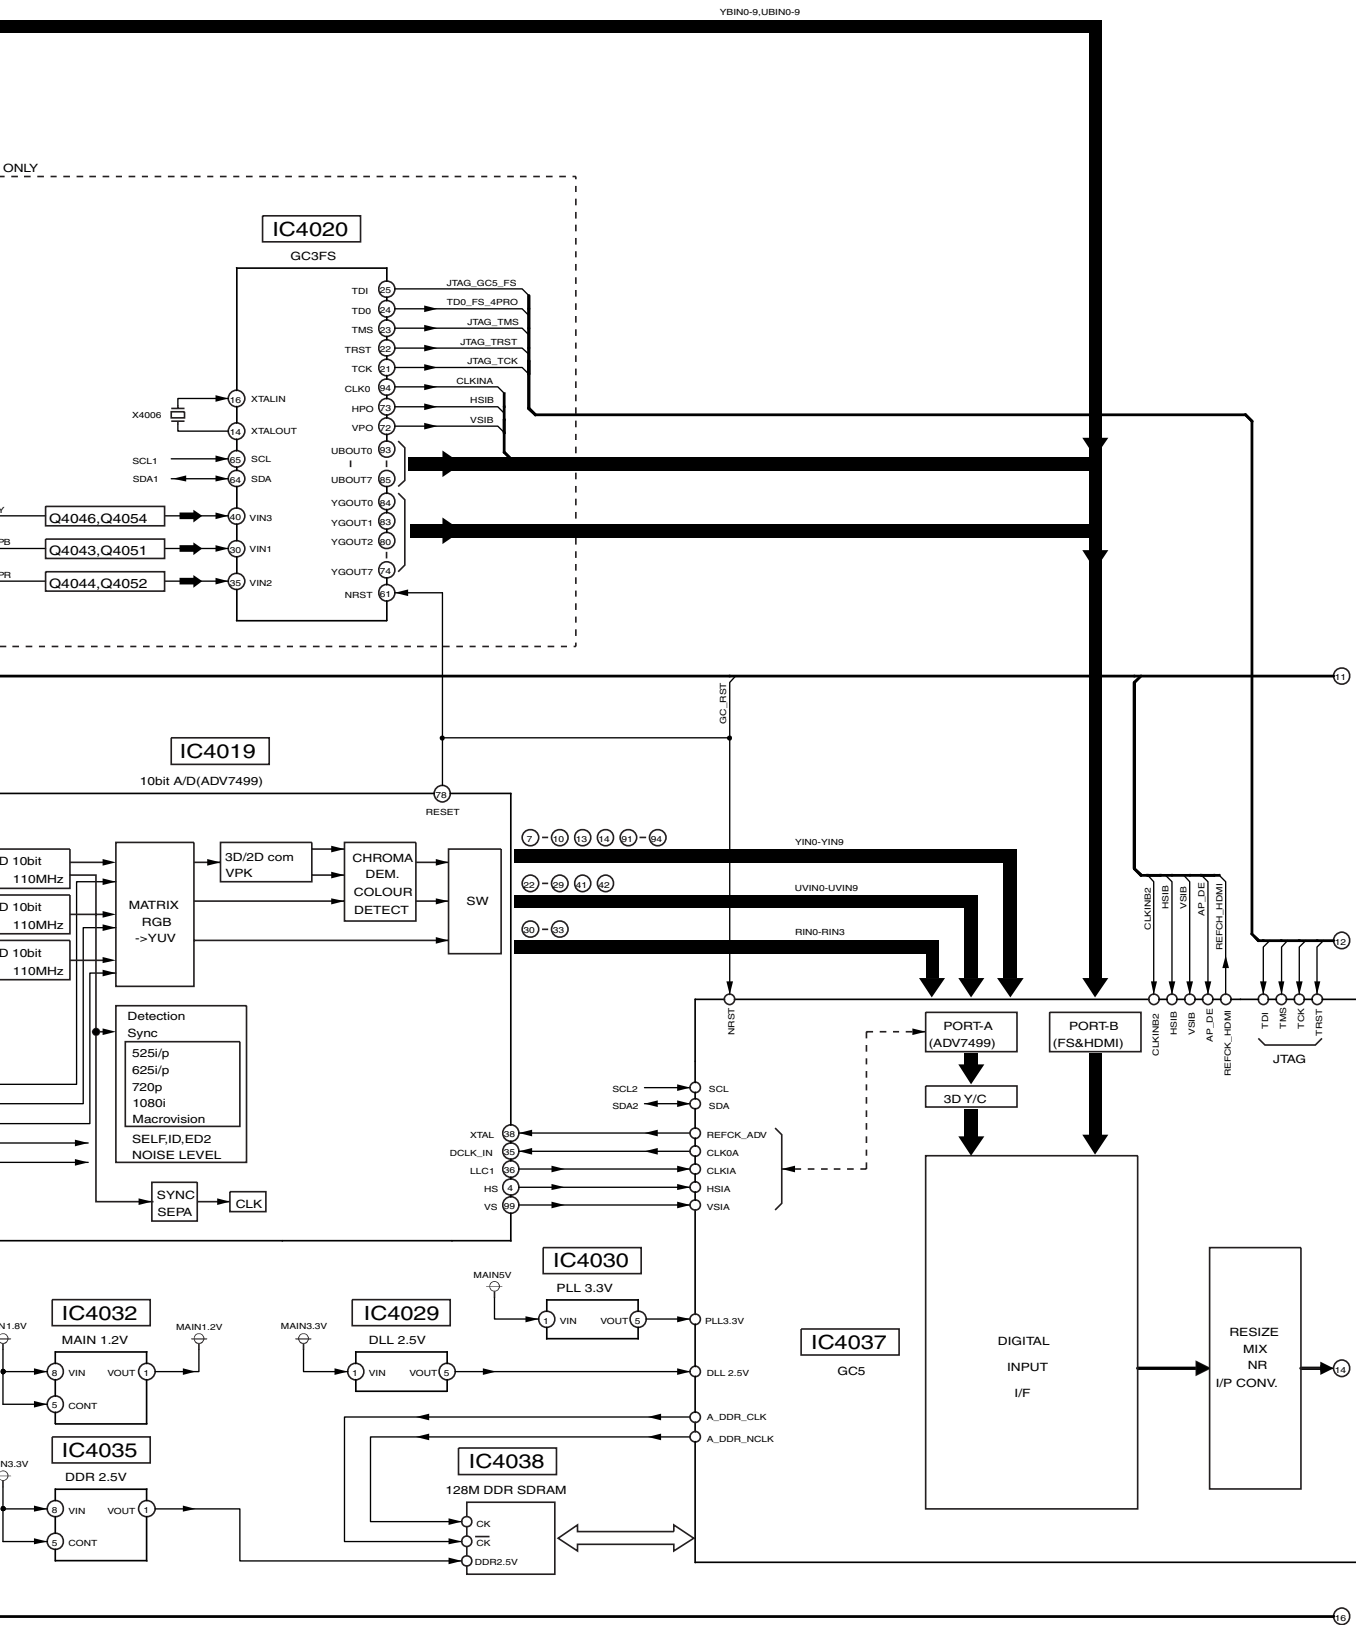


TH-42PV60A/H/M/MT
DG-Board (2 of 3) Block Diagram




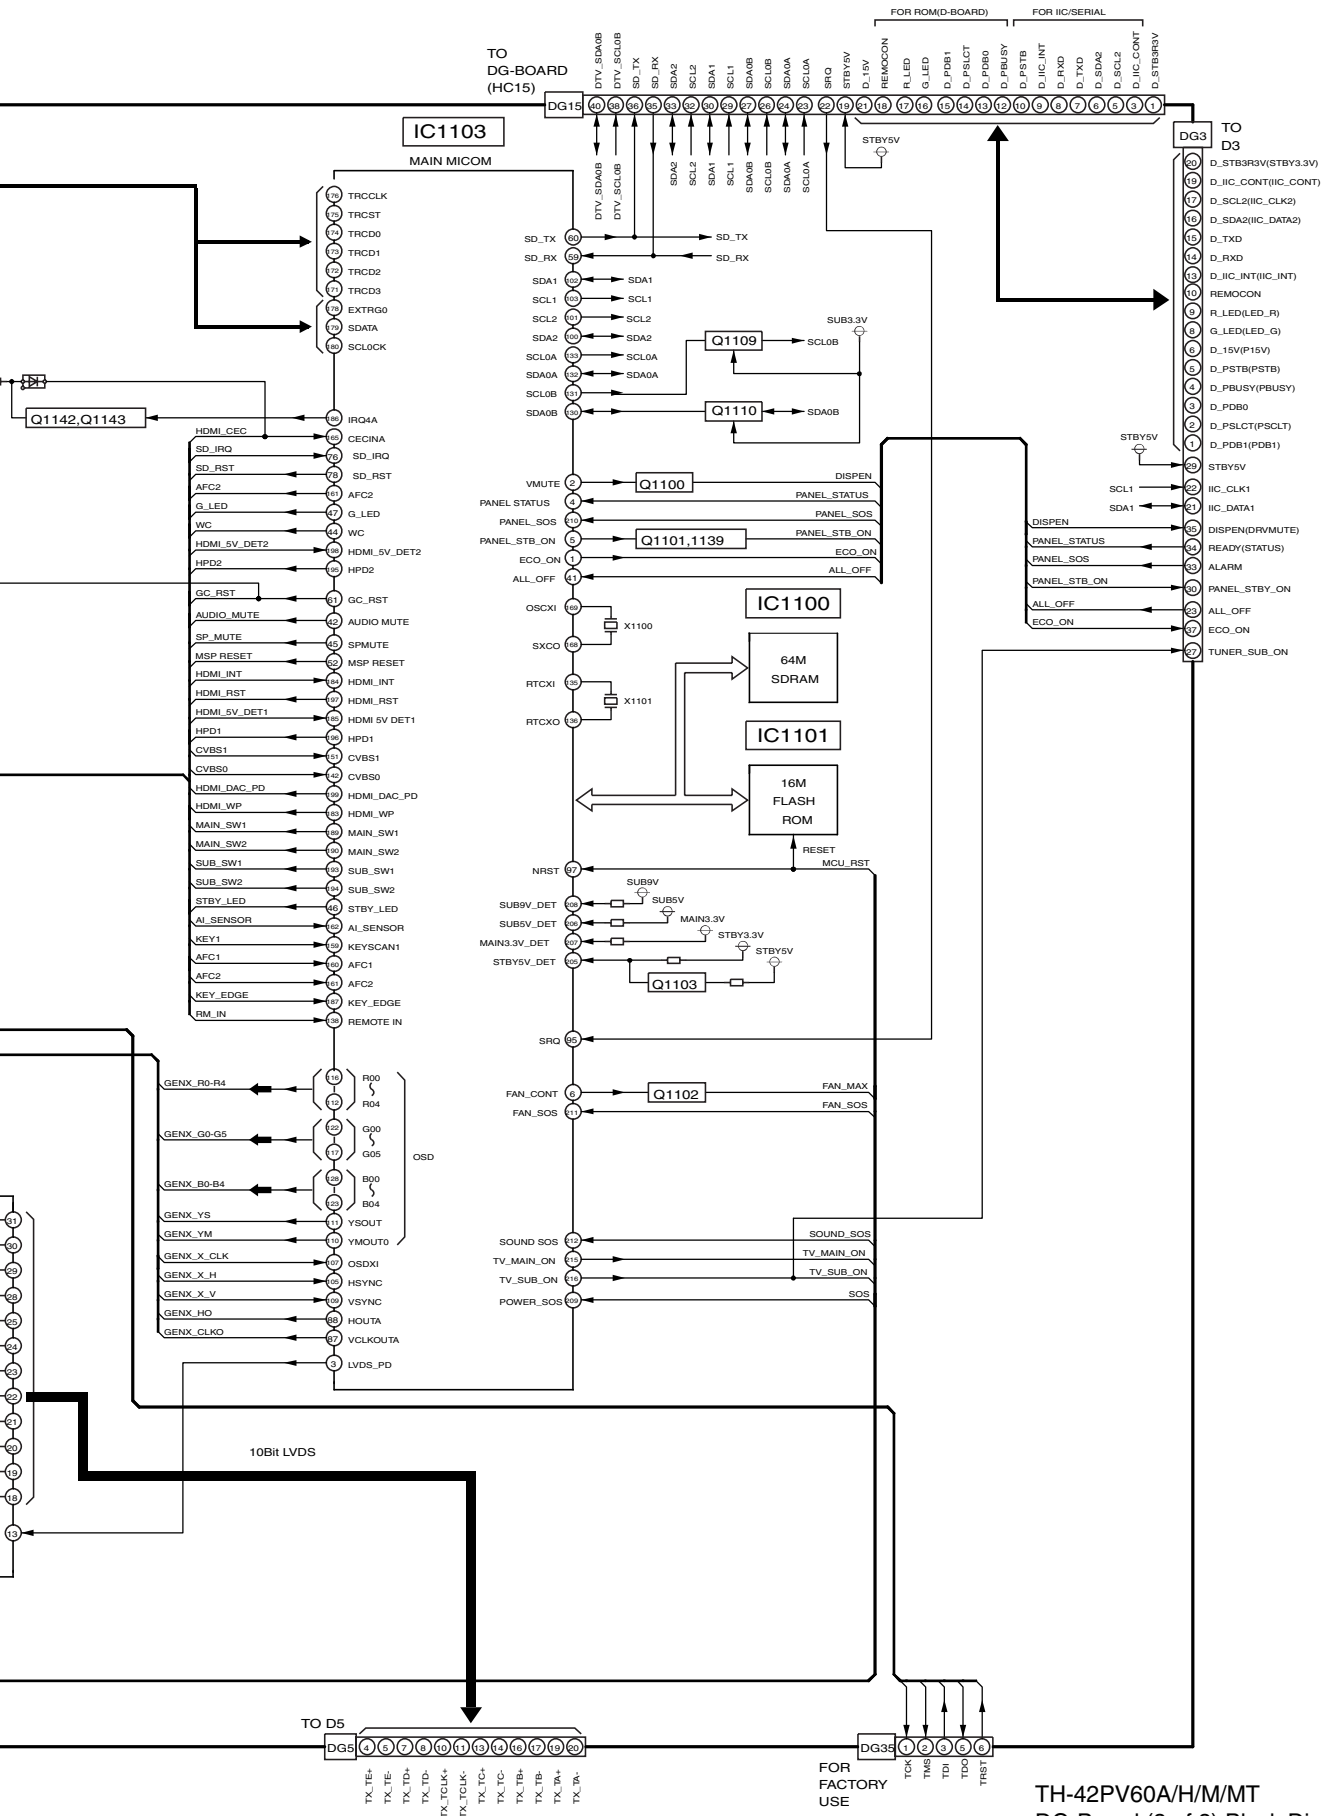

14.24. DG-Board (1 of 8) Schematic Diagram

! DG-BOARD (1/8)
TNPA3756CP (TH-42PV60A)
TNPA3756CS (TH-42PV60H/M/MT)

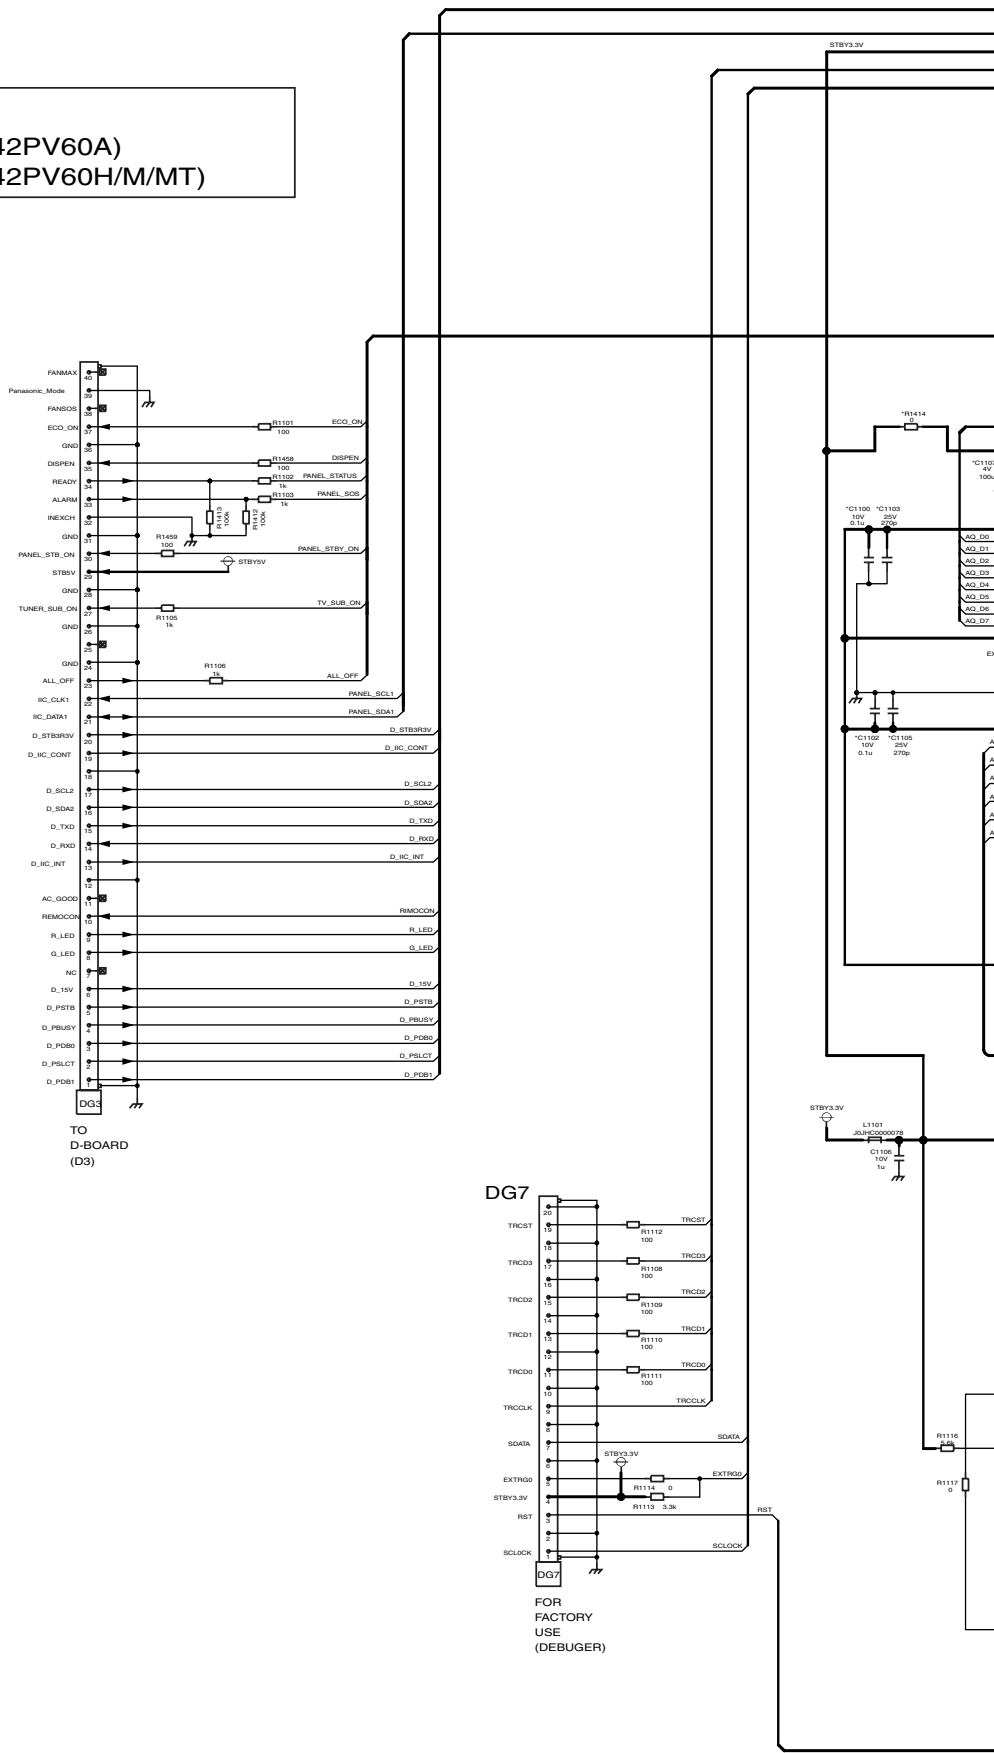

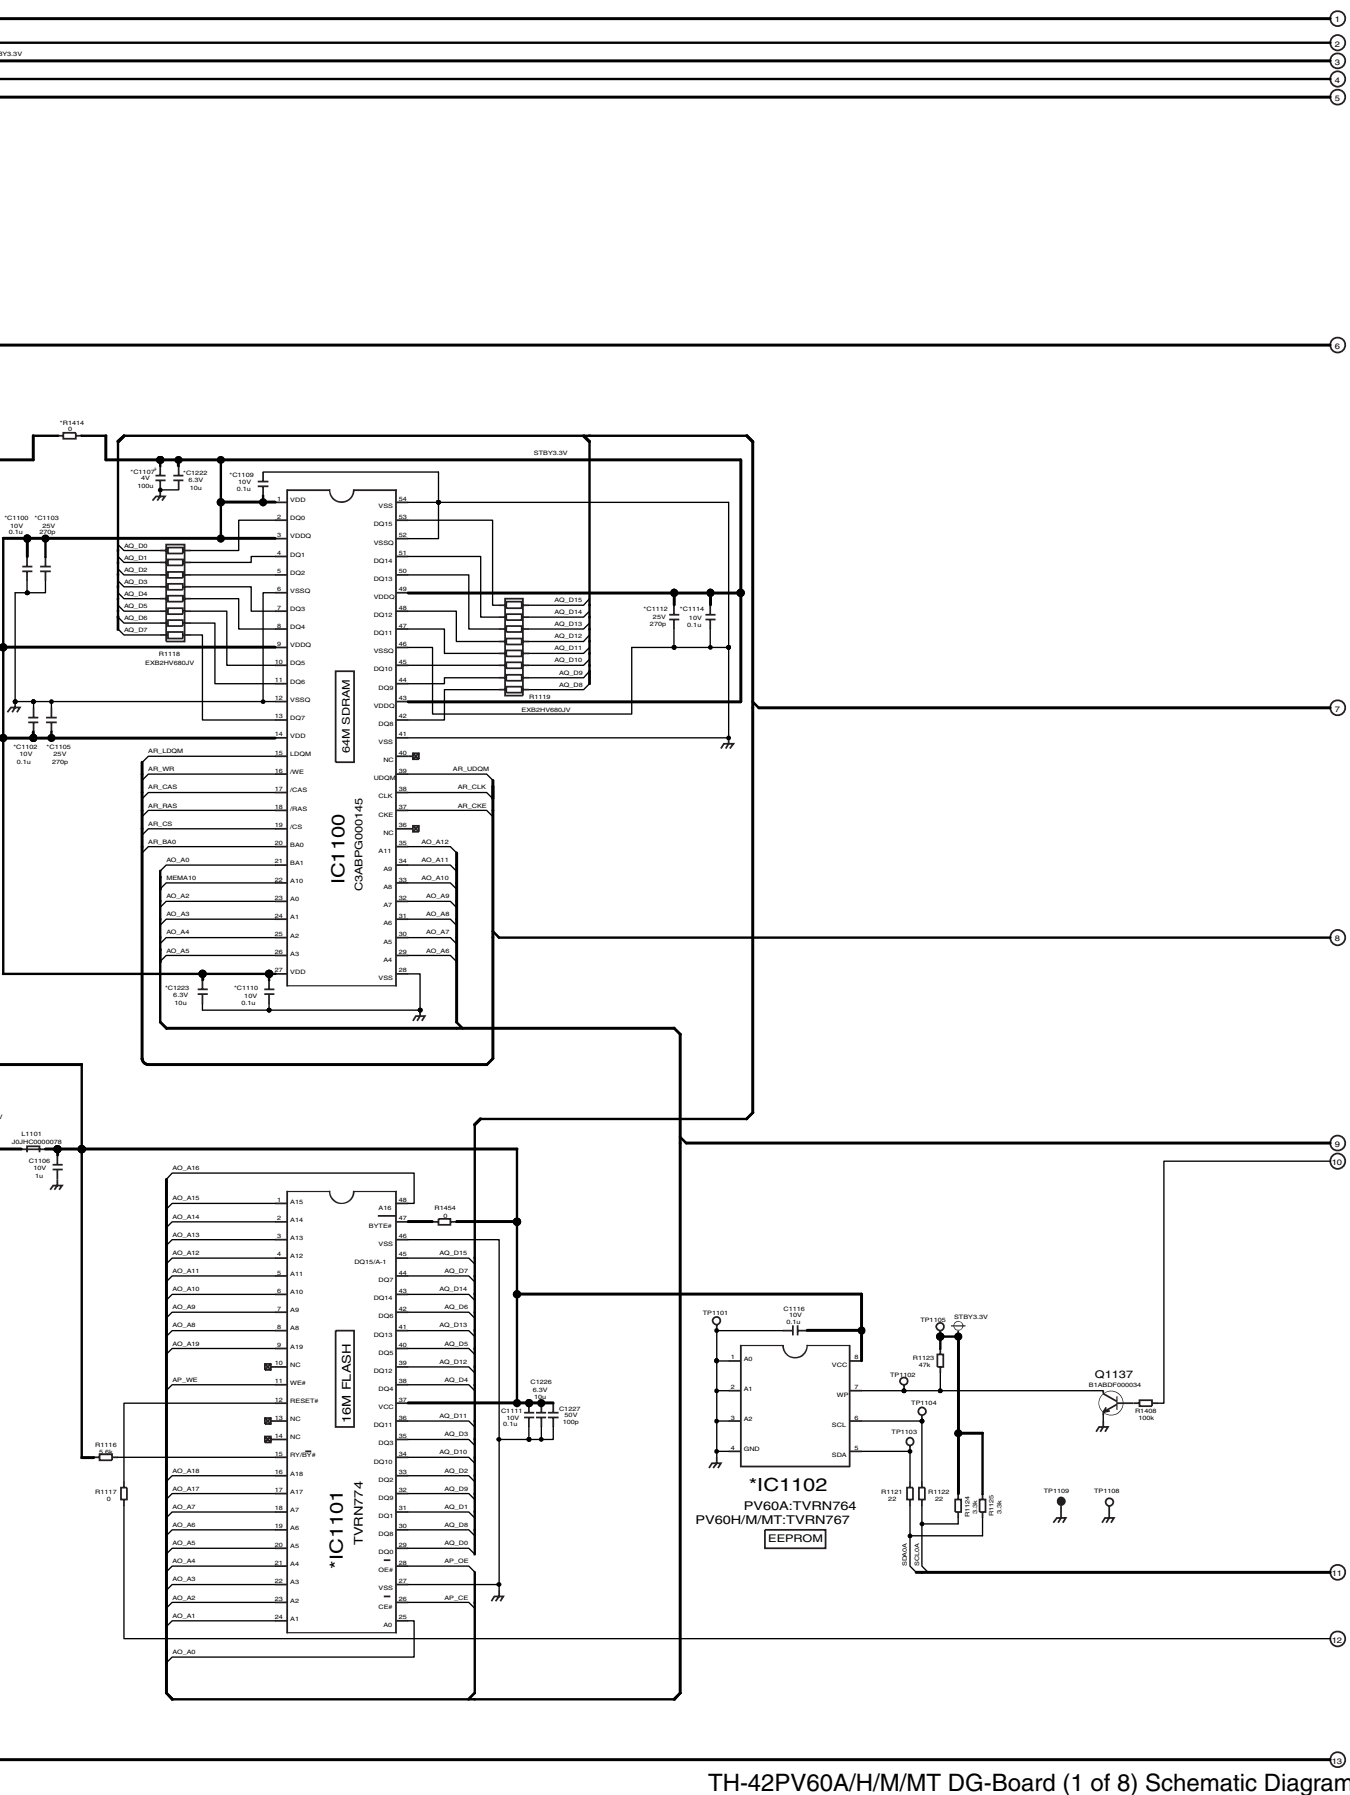





14



23






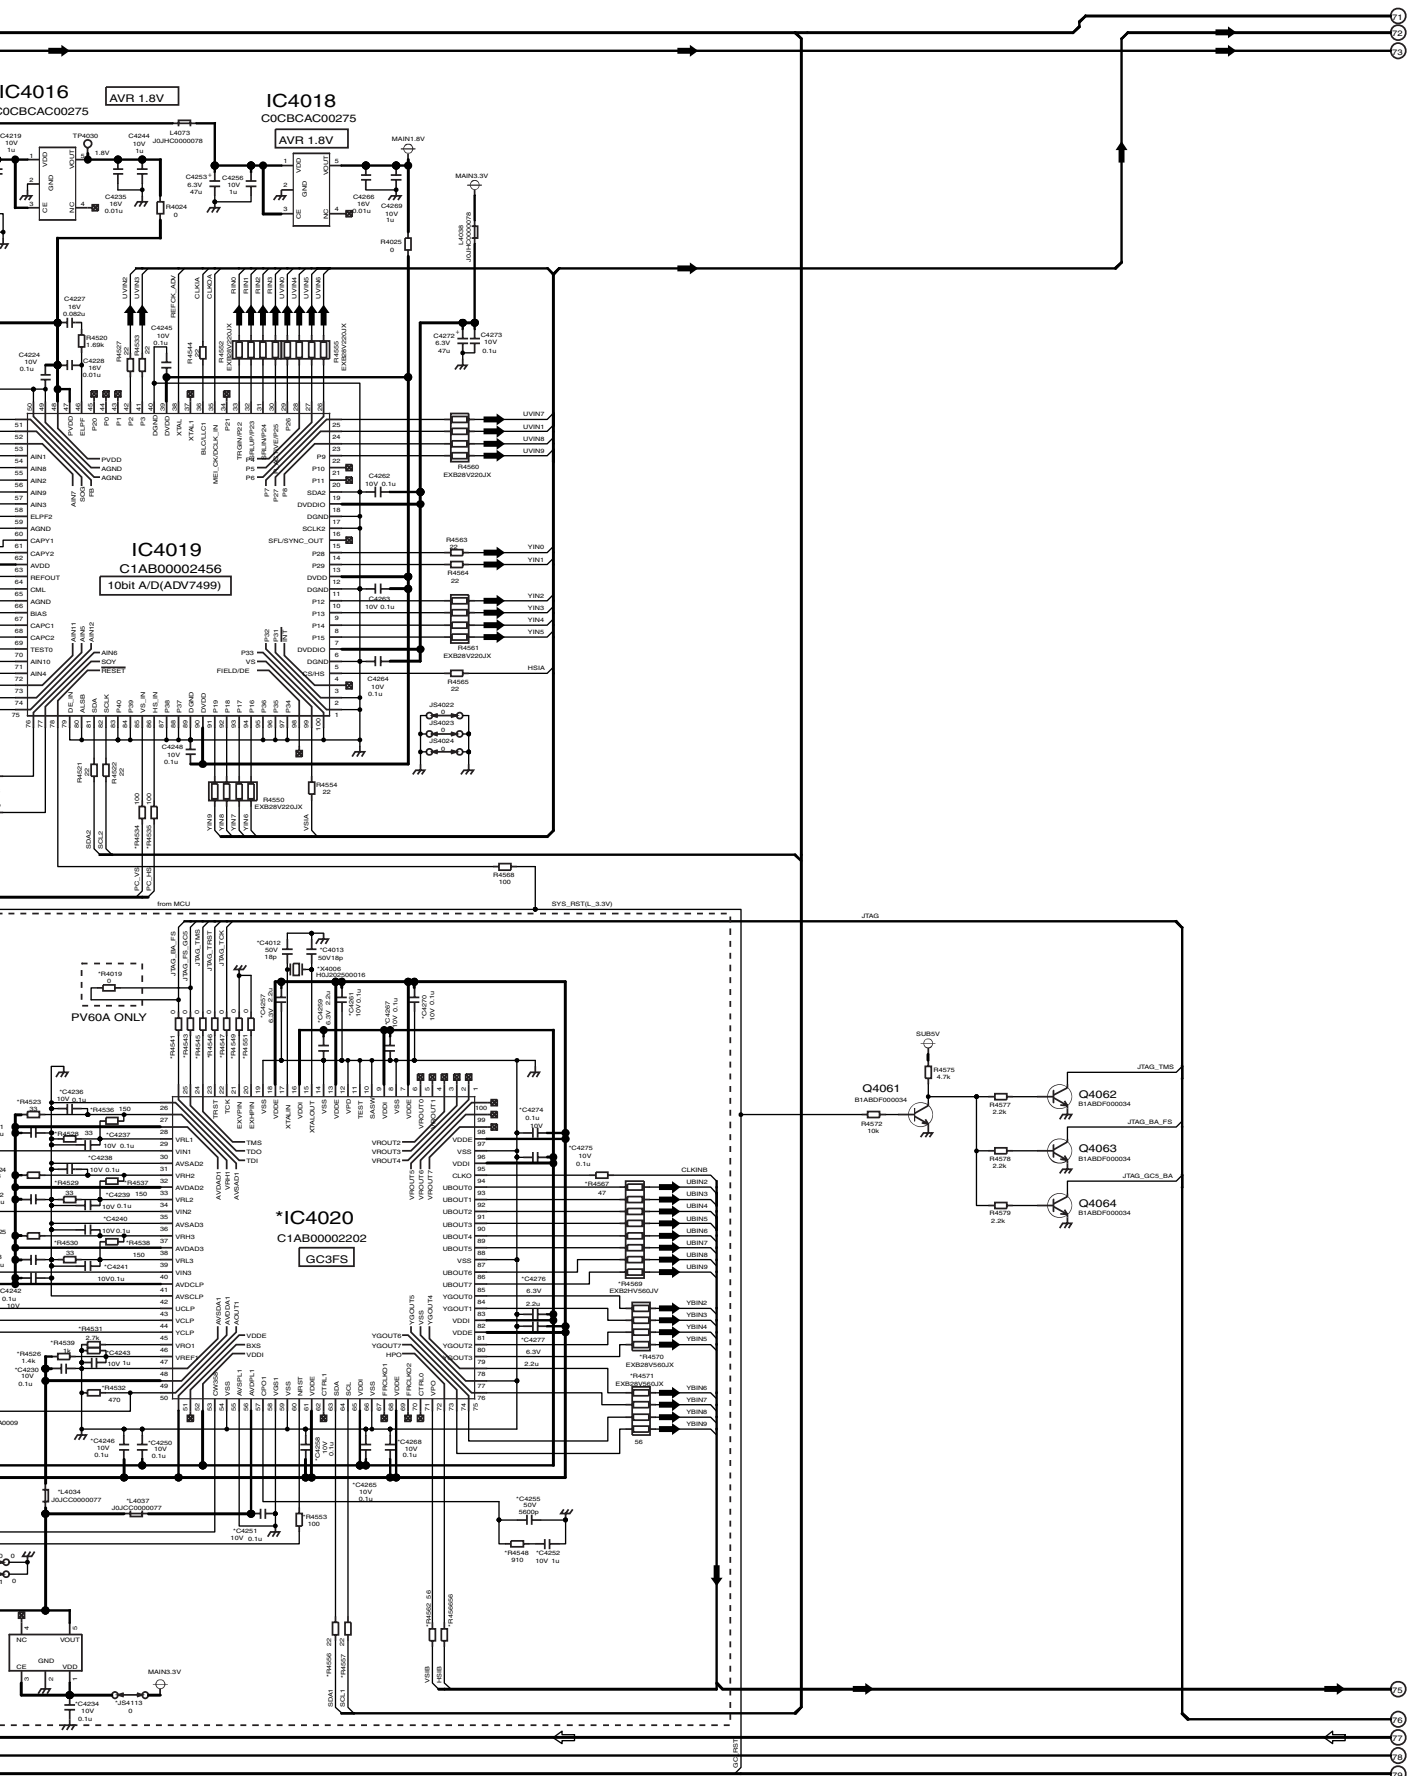


TH-42PV60A/H/M/MT DG-Board (4 of 8) Schematic Diagram








14.30. DG-Board (7 of 8) Schematic Diagram




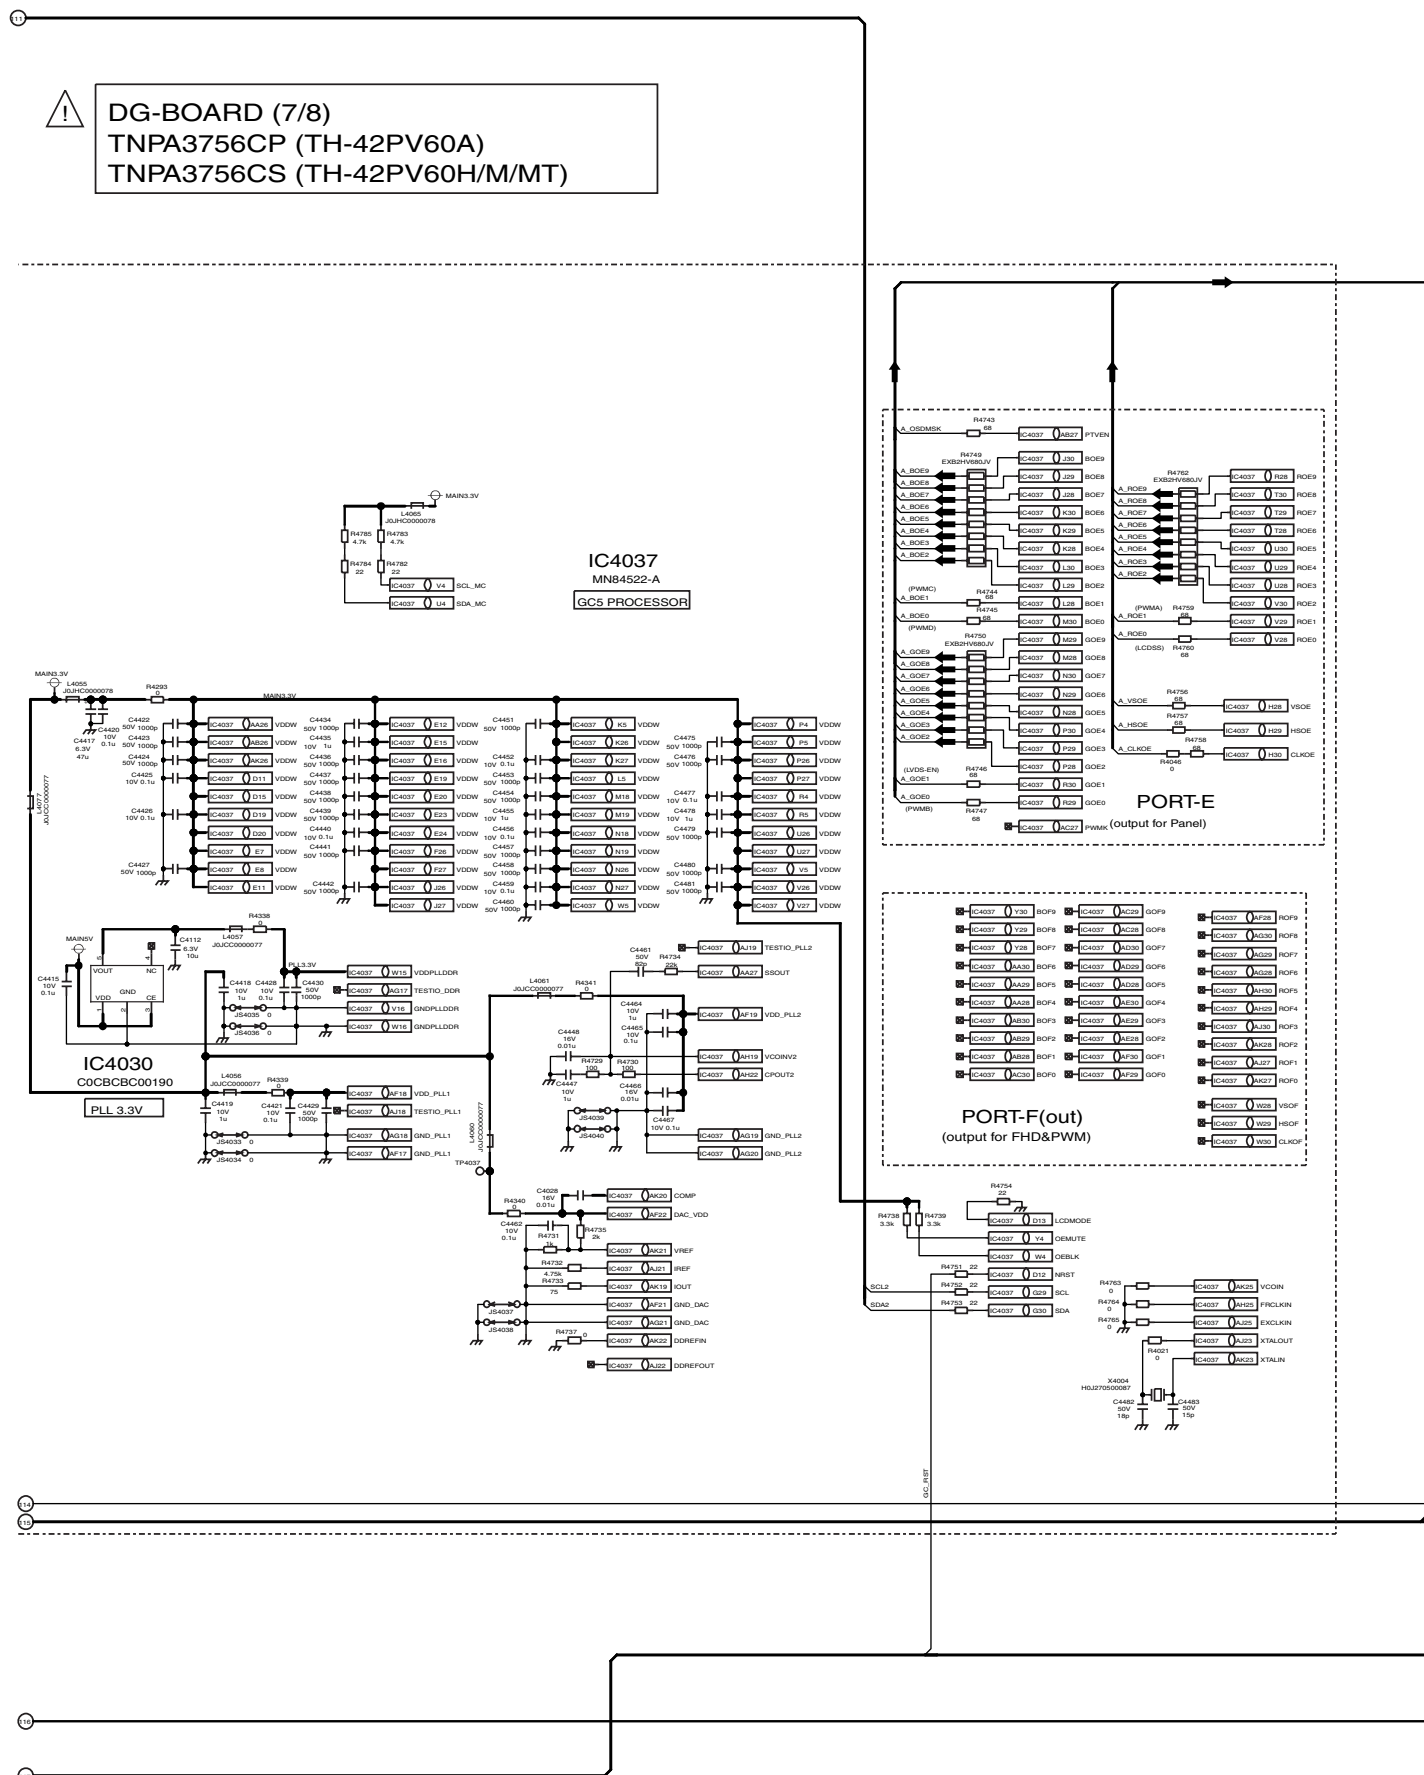


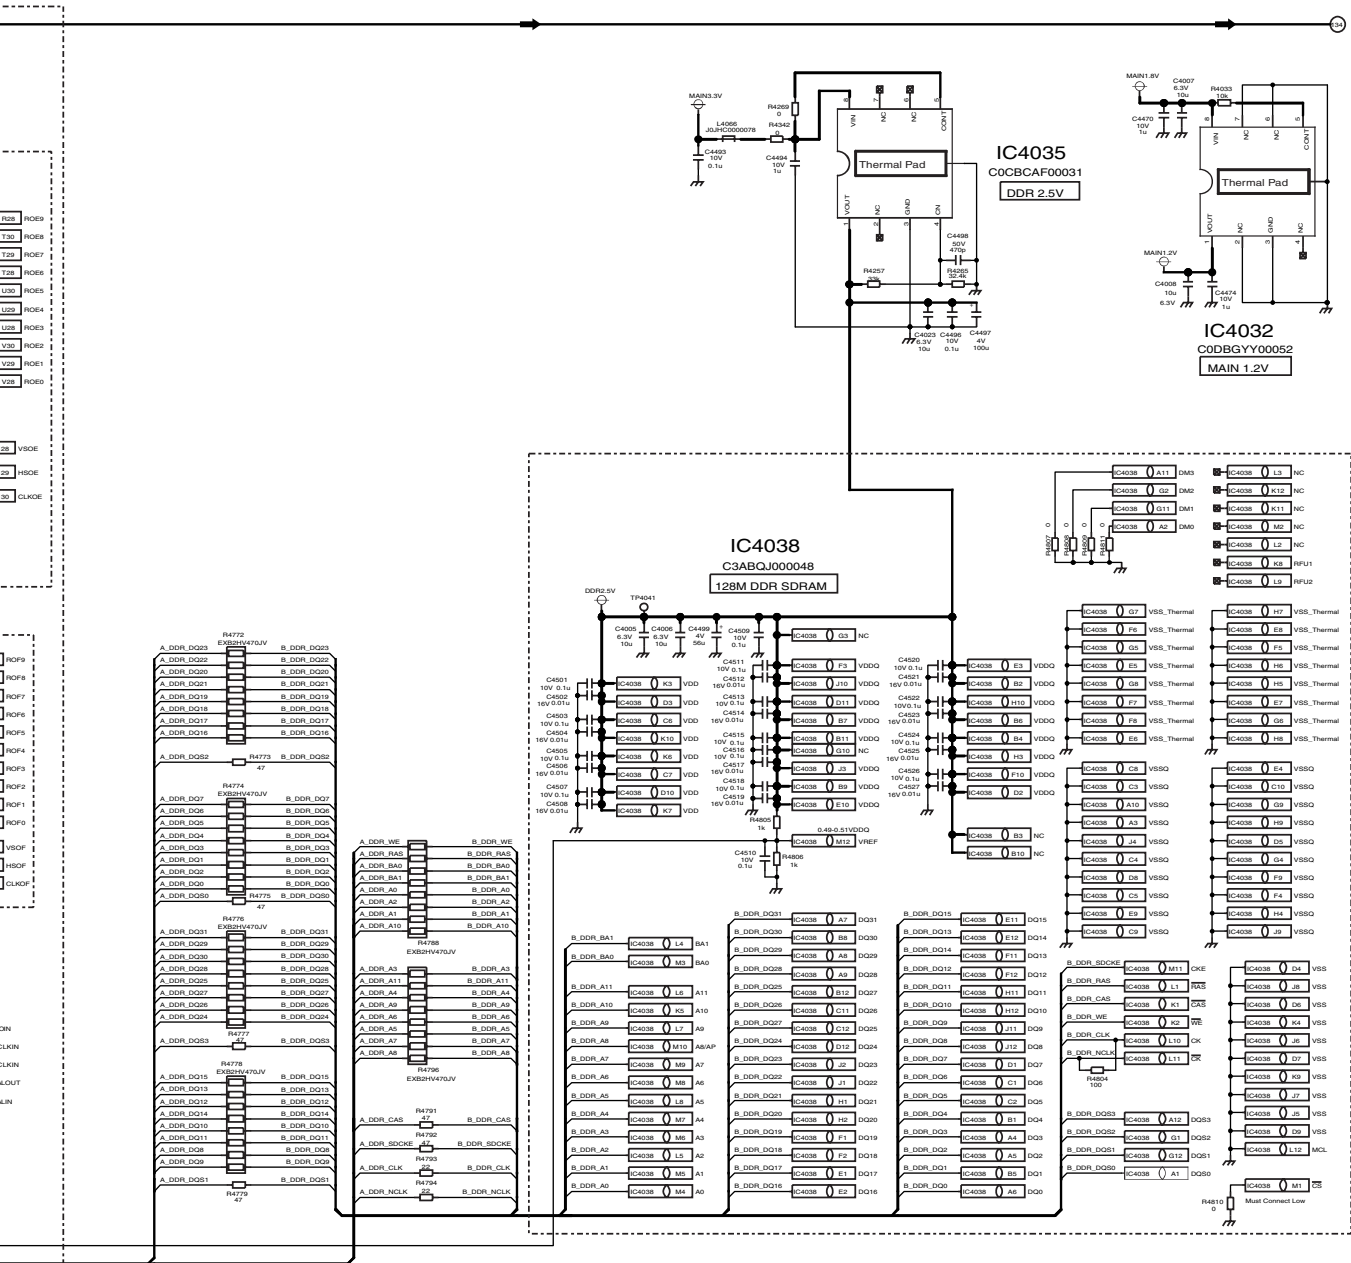

TH-42PV60A/H/M/MT DG-Board (7 of 8) Schematic Diagram




138

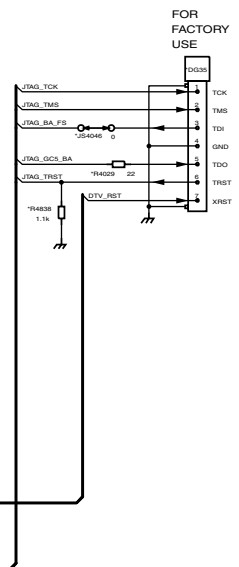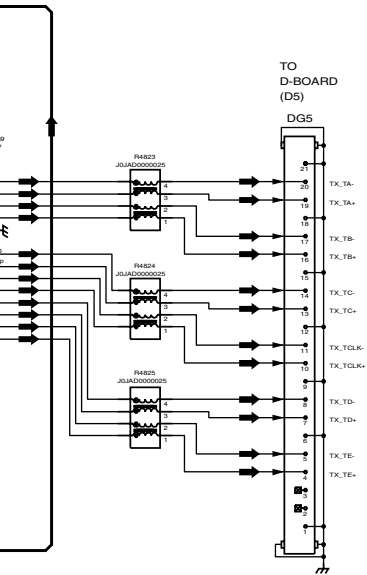


TH-42PV60A/H/M/MT DG-Board (8 of 8) Schematic Diagram



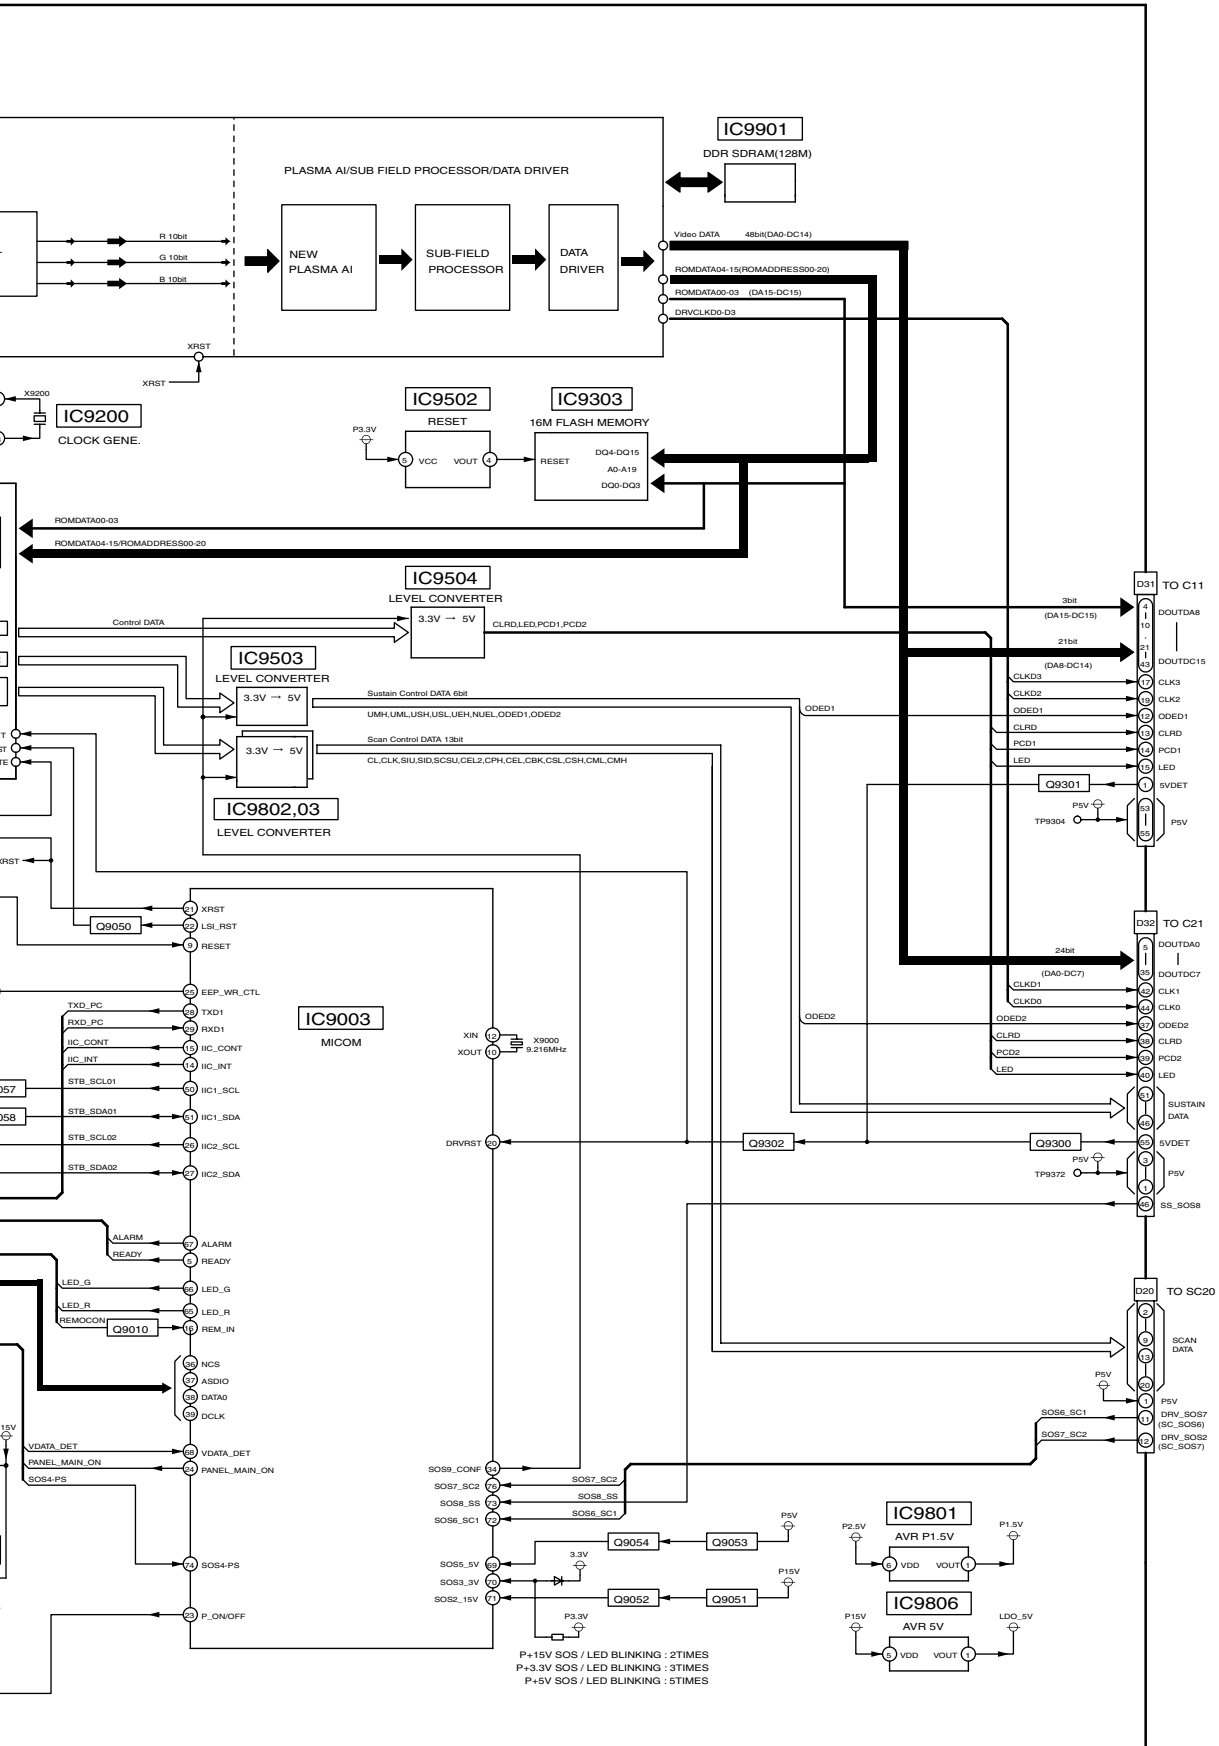

TH-42PV60A/H/M/MT
D-Board Block Diagram









14

14.35. D-Board (3 of 6) Schematic Diagram

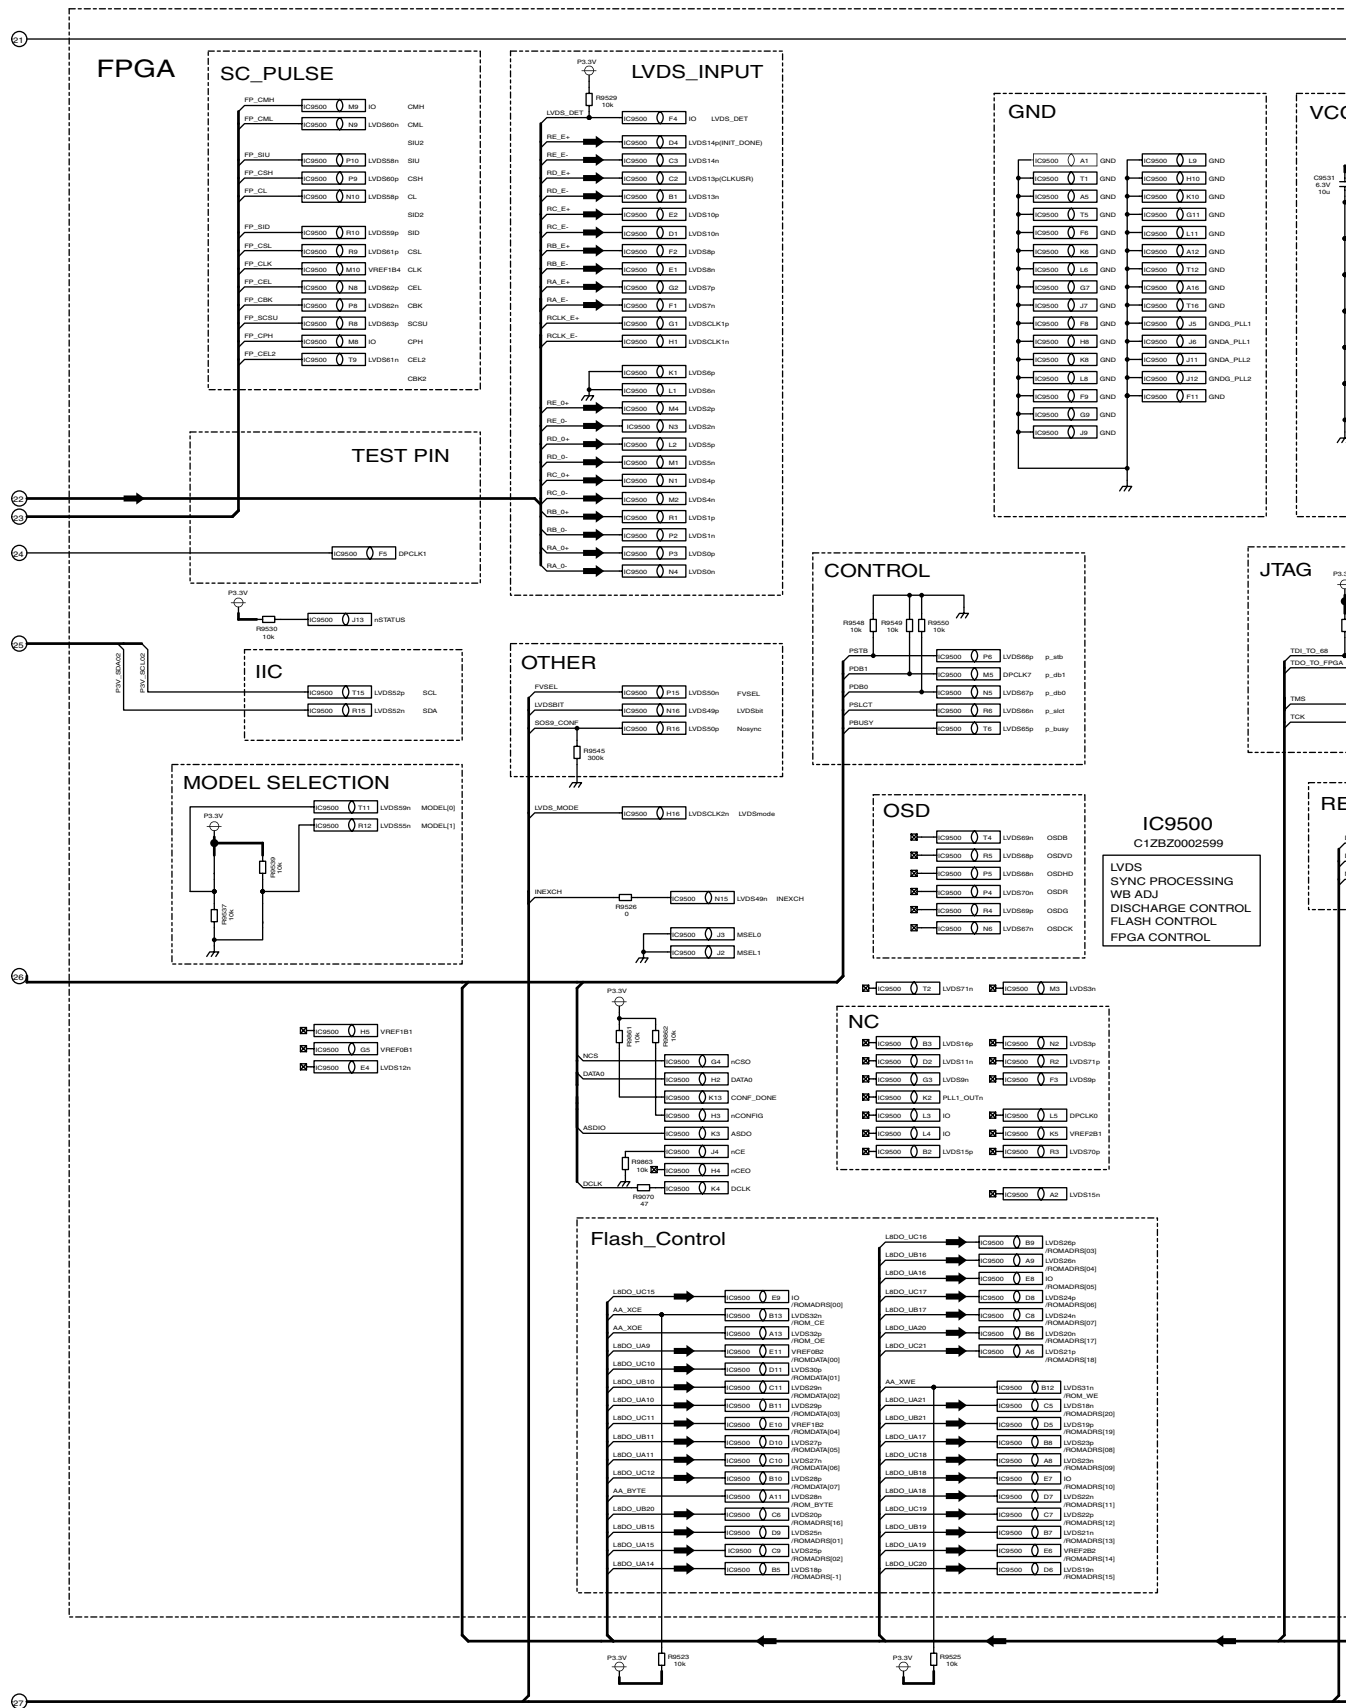


TH-42PV60A/H/M/MT
D-Board (3 of 6) Schematic Diagram

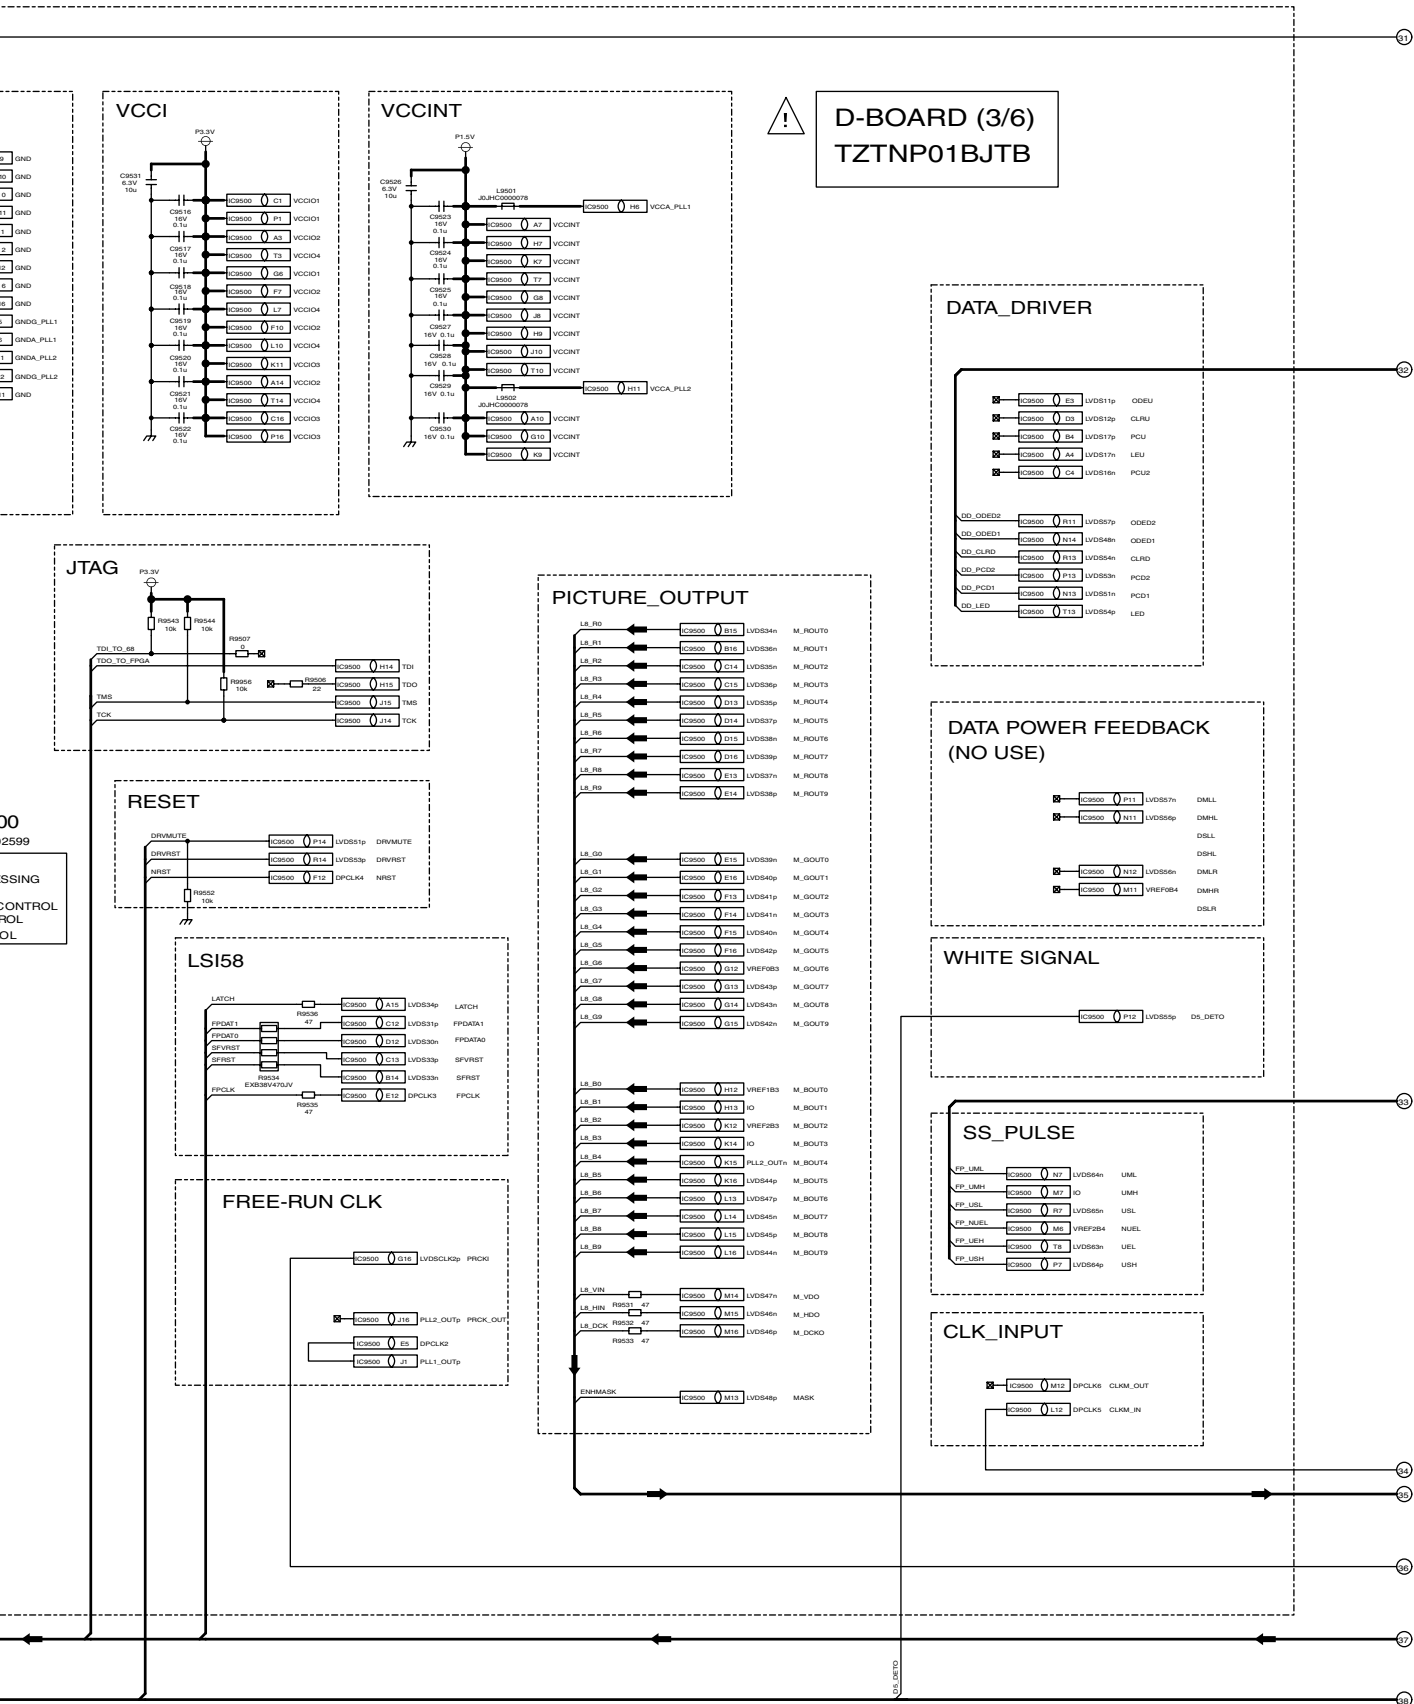





38

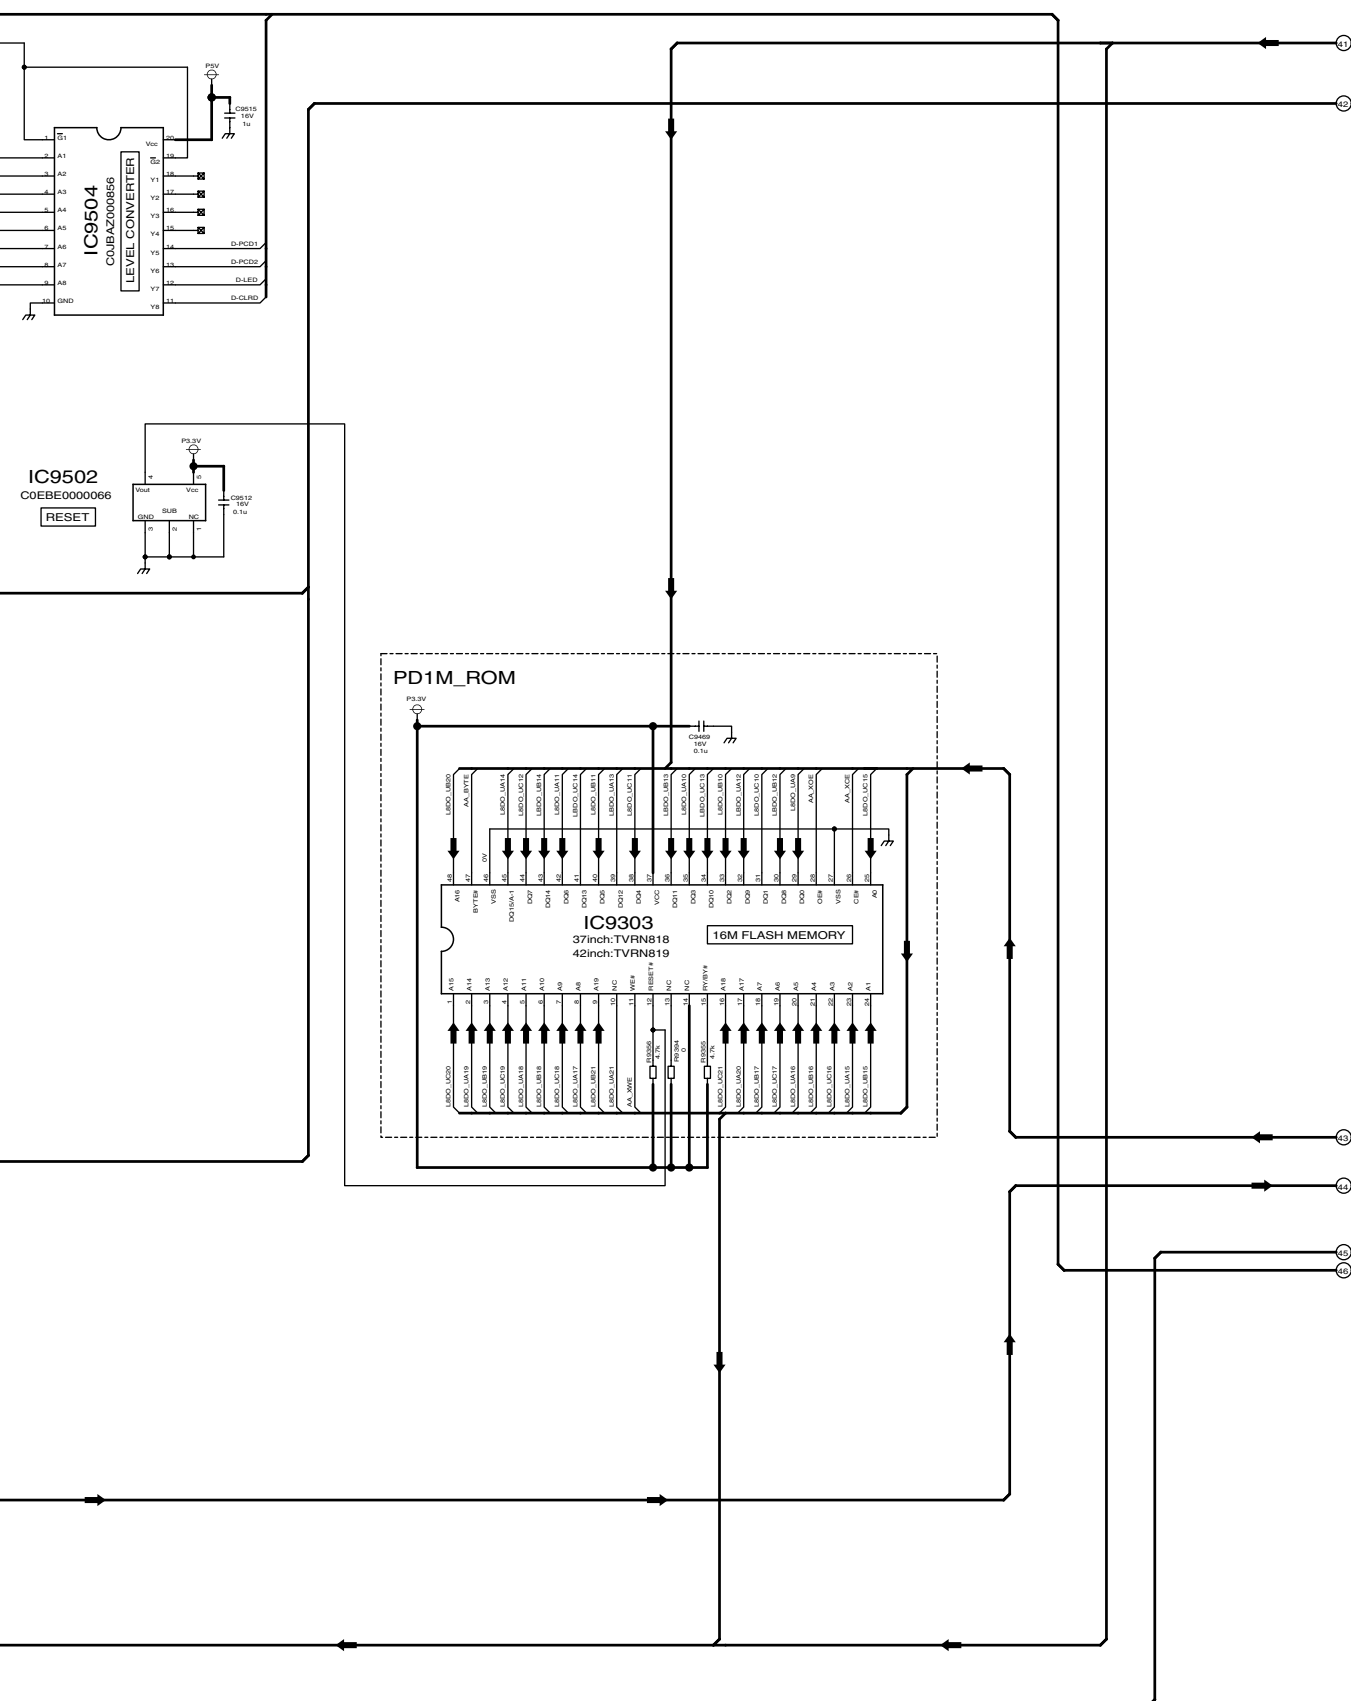



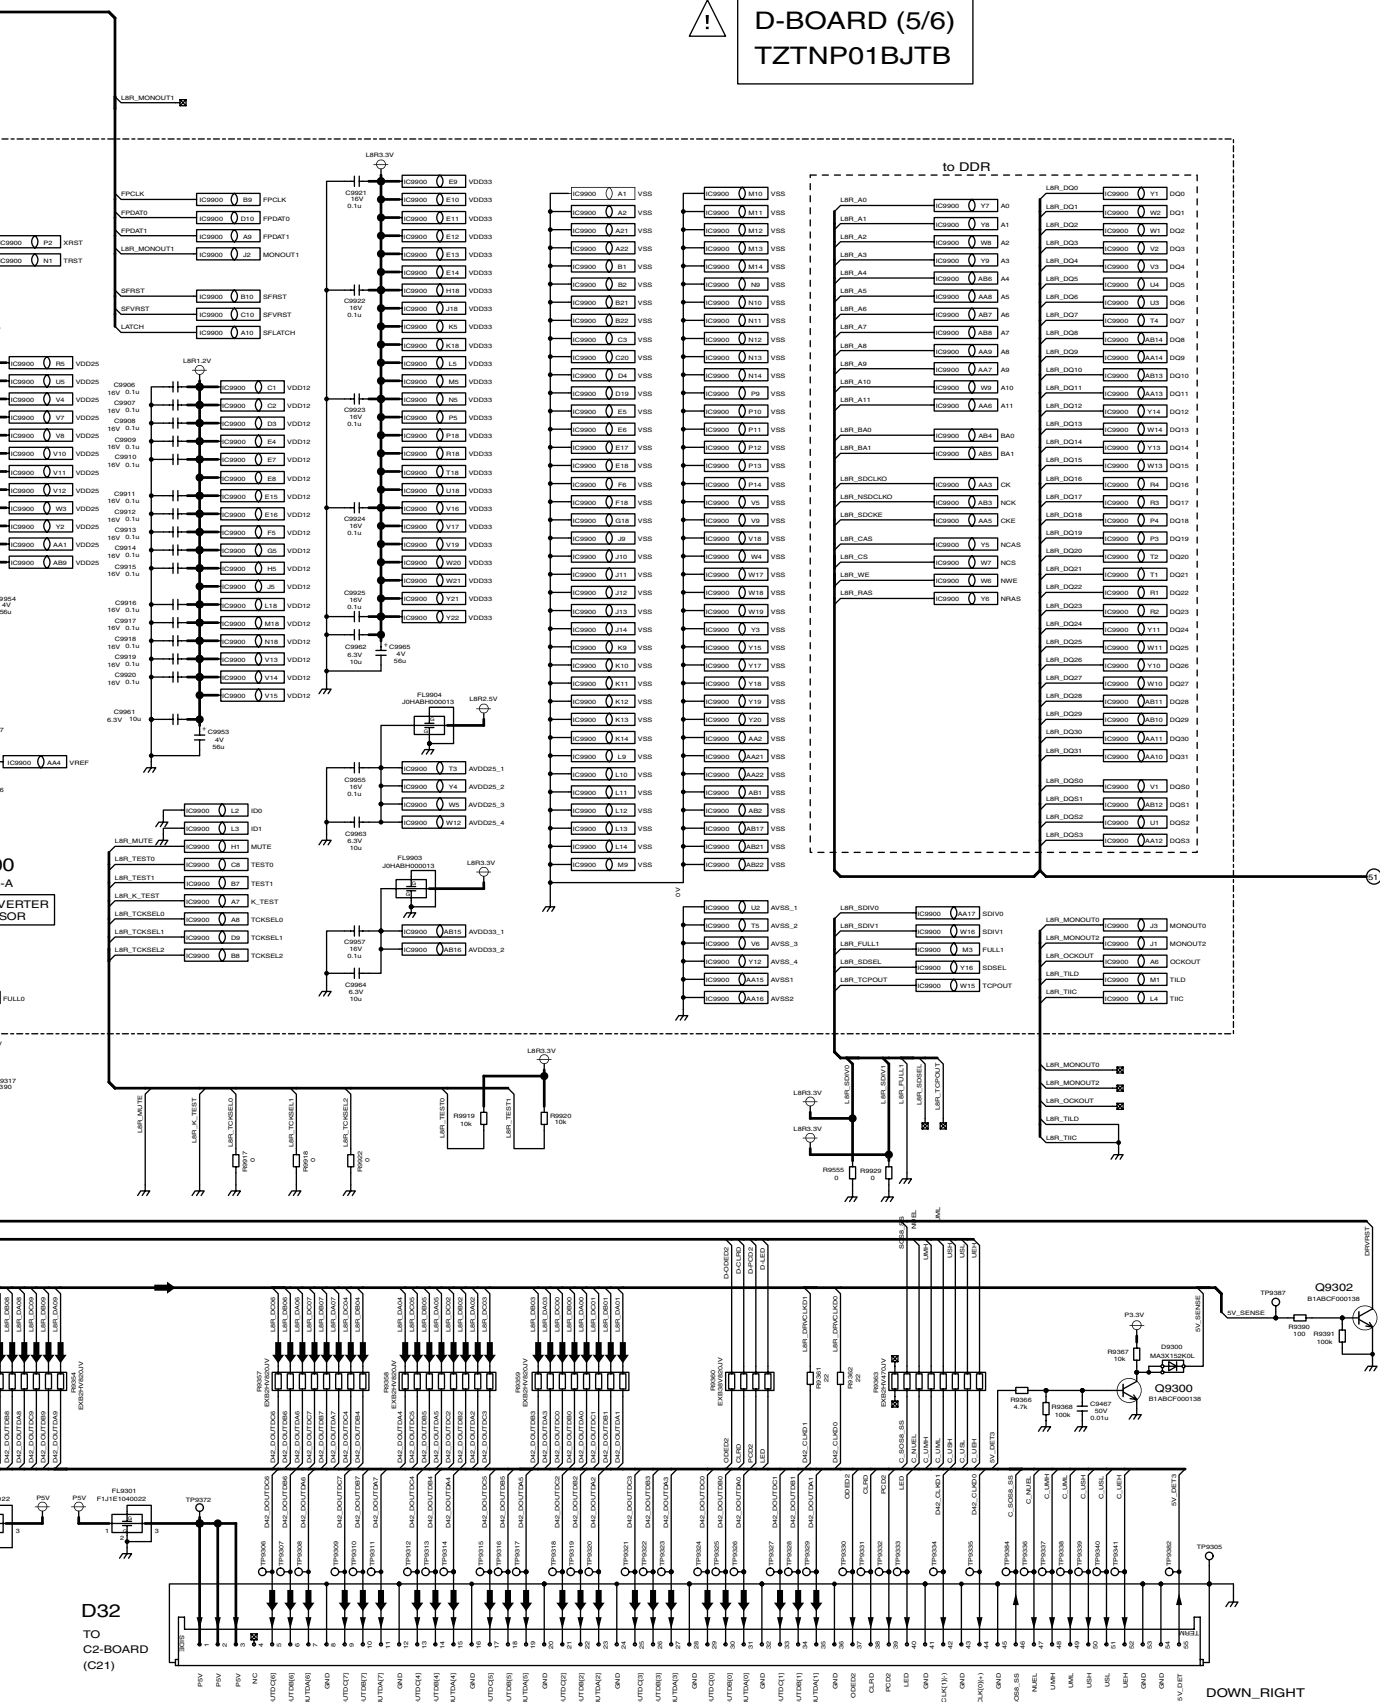

TH-42PV60A/H/M/MT D-Board (5 of 6) Schematic Diagram

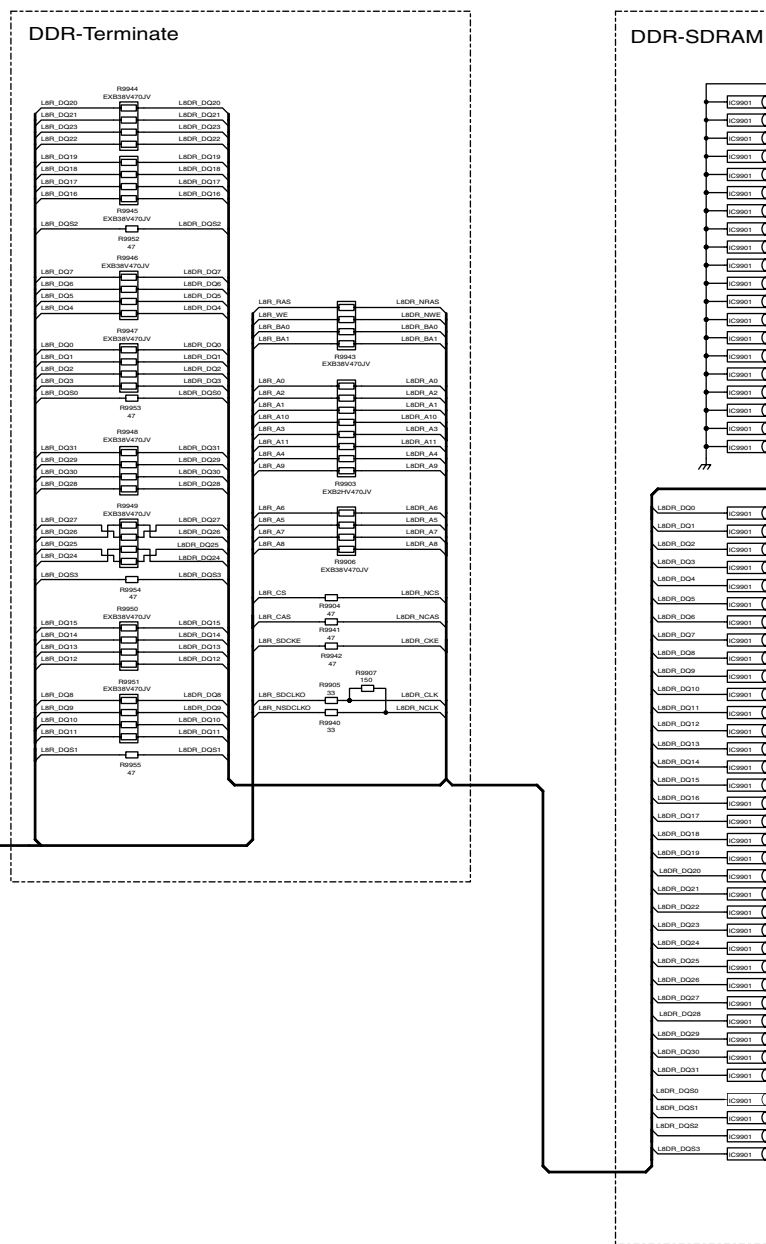

IC9901
C3ABQJ000051
DDR SDRAM(128M)

Pin 1 to Pin 30:

IC9901 1 A2	VSSQ
IC9901 2 A10	VSSQ
IC9901 3 C3	VSSQ
IC9901 4 C4	VSSQ
IC9901 5 C8	VSSQ
IC9901 6 C5	VSSQ
IC9901 7 C9	VSSQ
IC9901 8 C10	VSSQ
IC9901 9 E4	VSSQ
IC9901 10 C6	VSSQ
IC9901 11 C8	VSSQ
IC9901 12 C9	VSSQ
IC9901 13 F4	VSSQ
IC9901 14 F9	VSSQ
IC9901 15 G8	VSSQ
IC9901 16 G4	VSSQ
IC9901 17 J4	VSSQ
IC9901 18 J4	VSSQ
IC9901 19 J8	VSSQ
IC9901 20 J9	VSSQ

Pin 31 to Pin 60:

IC9901 21 C4	VSS
IC9901 22 C6	VSS
IC9901 23 C7	VSS
IC9901 24 C9	VSS
IC9901 25 C5	VSS
IC9901 26 C8	VSS
IC9901 27 C10	VSS
IC9901 28 C6	VSS
IC9901 29 E4	VSS
IC9901 30 C9	VSS
IC9901 31 E5	VSS, Thermal
IC9901 32 E6	VSS, Thermal
IC9901 33 E7	VSS, Thermal
IC9901 34 E8	VSS, Thermal
IC9901 35 E9	VSS, Thermal
IC9901 36 F7	VSS, Thermal
IC9901 37 F8	VSS, Thermal
IC9901 38 G5	VSS, Thermal
IC9901 39 G6	VSS, Thermal
IC9901 40 G7	VSS, Thermal
IC9901 41 G8	VSS, Thermal
IC9901 42 H5	VSS, Thermal
IC9901 43 H6	VSS, Thermal
IC9901 44 H7	VSS, Thermal
IC9901 45 H8	VSS, Thermal
IC9901 46 L12	MCL

Pin 61 to Pin 100:

IC9901 47 A0	AD
IC9901 48 A1	A2
IC9901 49 A2	A2
IC9901 50 A3	A2
IC9901 51 M6	A3
IC9901 52 M7	A4
IC9901 53 L3	A5
IC9901 54 M8	A6
IC9901 55 M9	A7
IC9901 56 M10	AB/AP
IC9901 57 L7	A9
IC9901 58 K5	A10
IC9901 59 L8	A11
IC9901 60 K2	WE
IC9901 61 M11	OKE
IC9901 62 M1	OKE
IC9901 63 K1	PCSE
IC9901 64 L1	PCSE
IC9901 65 M3	BA0
IC9901 66 L4	BA1
IC9901 67 L10	CLK
IC9901 68 L11	CKE
IC9901 69 M4	A0
IC9901 70 M5	A1
IC9901 71 L5	A2
IC9901 72 M6	A3
IC9901 73 M7	A4
IC9901 74 L3	A5
IC9901 75 M8	A6
IC9901 76 M9	A7
IC9901 77 L7	A9
IC9901 78 K5	A10
IC9901 79 L8	A11
IC9901 80 K2	WE
IC9901 81 M11	OKE
IC9901 82 M1	OKE
IC9901 83 K1	PCSE
IC9901 84 L1	PCSE
IC9901 85 M3	BA0
IC9901 86 L4	BA1
IC9901 87 L10	CLK
IC9901 88 L11	CKE
IC9901 89 M4	A0
IC9901 90 M5	A1
IC9901 91 L5	A2
IC9901 92 M6	A3
IC9901 93 M7	A4
IC9901 94 L3	A5
IC9901 95 M8	A6
IC9901 96 M9	A7
IC9901 97 L7	A9
IC9901 98 K5	A10
IC9901 99 L8	A11
IC9901 100 K2	WE

Pin 101 to Pin 140:

IC9901 101 A10	VDD
IC9901 102 K6	VDD
IC9901 103 K7	VDD
IC9901 104 C10	VDD
IC9901 105 C8	VDD
IC9901 106 C7	VDD
IC9901 107 D9	VDD
IC9901 108 E3	VDD
IC9901 109 K3	VDD

Pin 141 to Pin 180:

IC9901 141 A10	VDD
IC9901 142 K6	VDD
IC9901 143 K7	VDD
IC9901 144 C10	VDD
IC9901 145 C8	VDD
IC9901 146 C7	VDD
IC9901 147 D9	VDD
IC9901 148 E3	VDD
IC9901 149 K3	VDD

Pin 181 to Pin 220:

IC9901 181 A10	VDD
IC9901 182 K6	VDD
IC9901 183 K7	VDD
IC9901 184 C10	VDD
IC9901 185 C8	VDD
IC9901 186 C7	VDD
IC9901 187 D9	VDD
IC9901 188 E3	VDD
IC9901 189 K3	VDD


Pin 221 to Pin 260:


IC9901 221 A10	VDD
IC9901 222 K6	VDD
IC9901 223 K7	VDD
IC9901 224 C10	VDD
IC9901 225 C8	VDD
IC9901 226 C7	VDD
IC9901 227 D9	VDD
IC9901 228 E3	VDD
IC9901 229 K3	VDD

Pin 261 to Pin 300:

IC9901 26


14.39. C1 and C2-Board Block Diagram

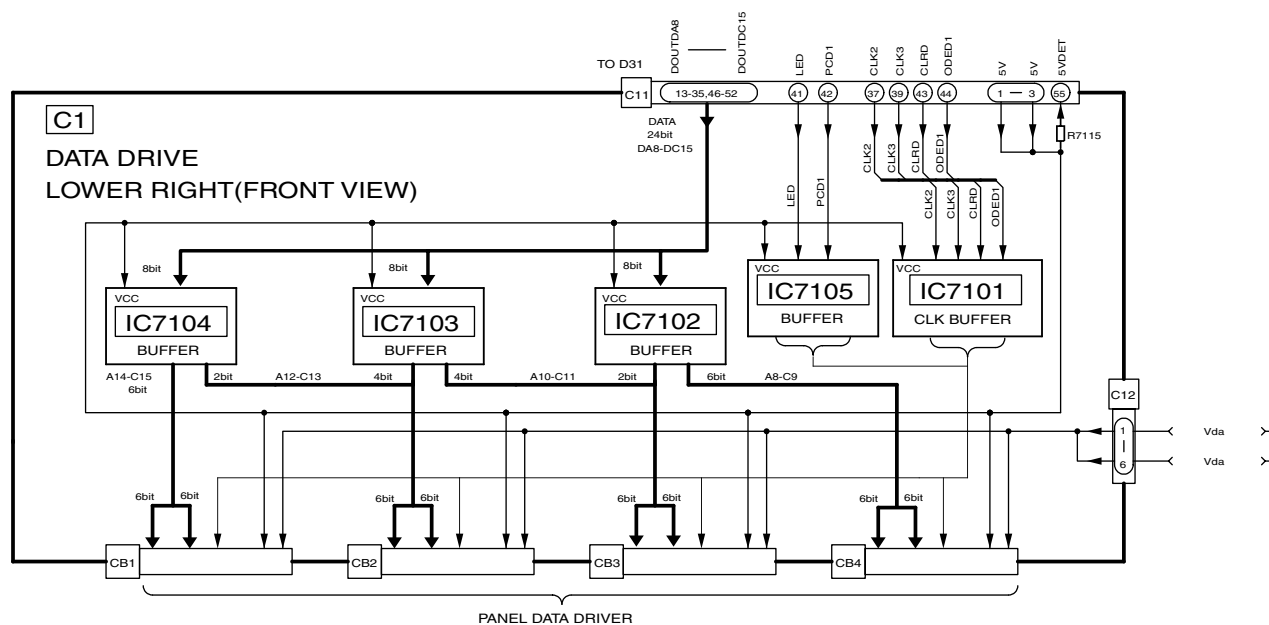

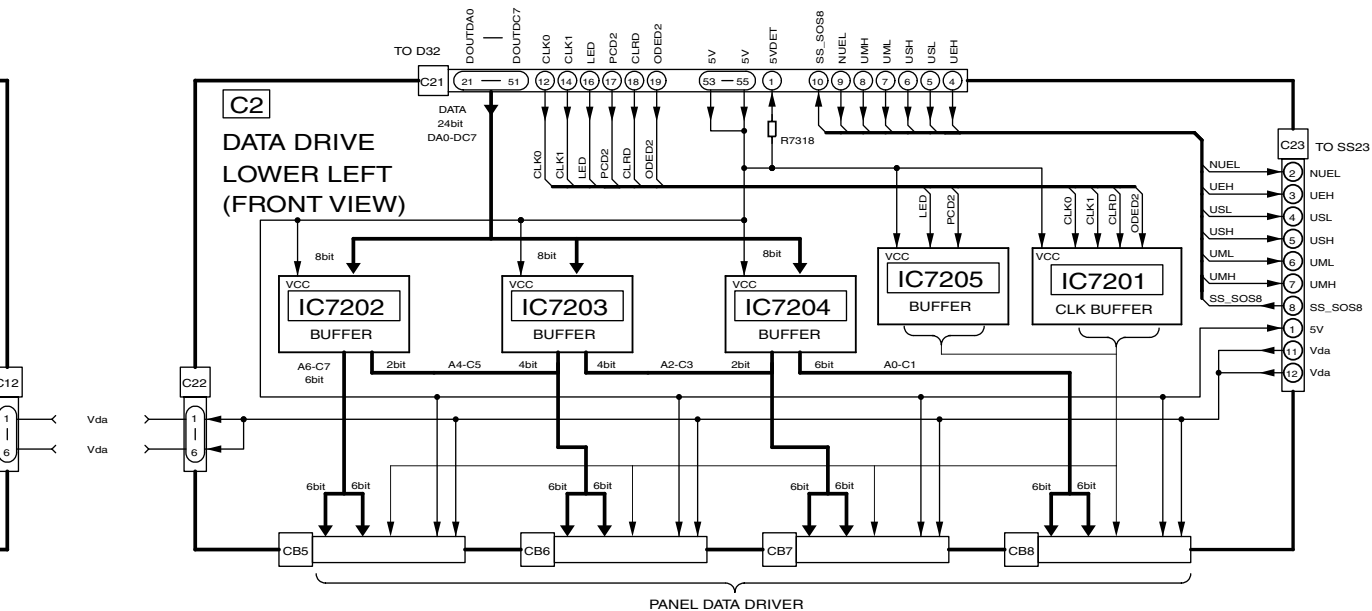

TH-42PV60A/H/M/MT
C1 and C2-Board Block Diagram




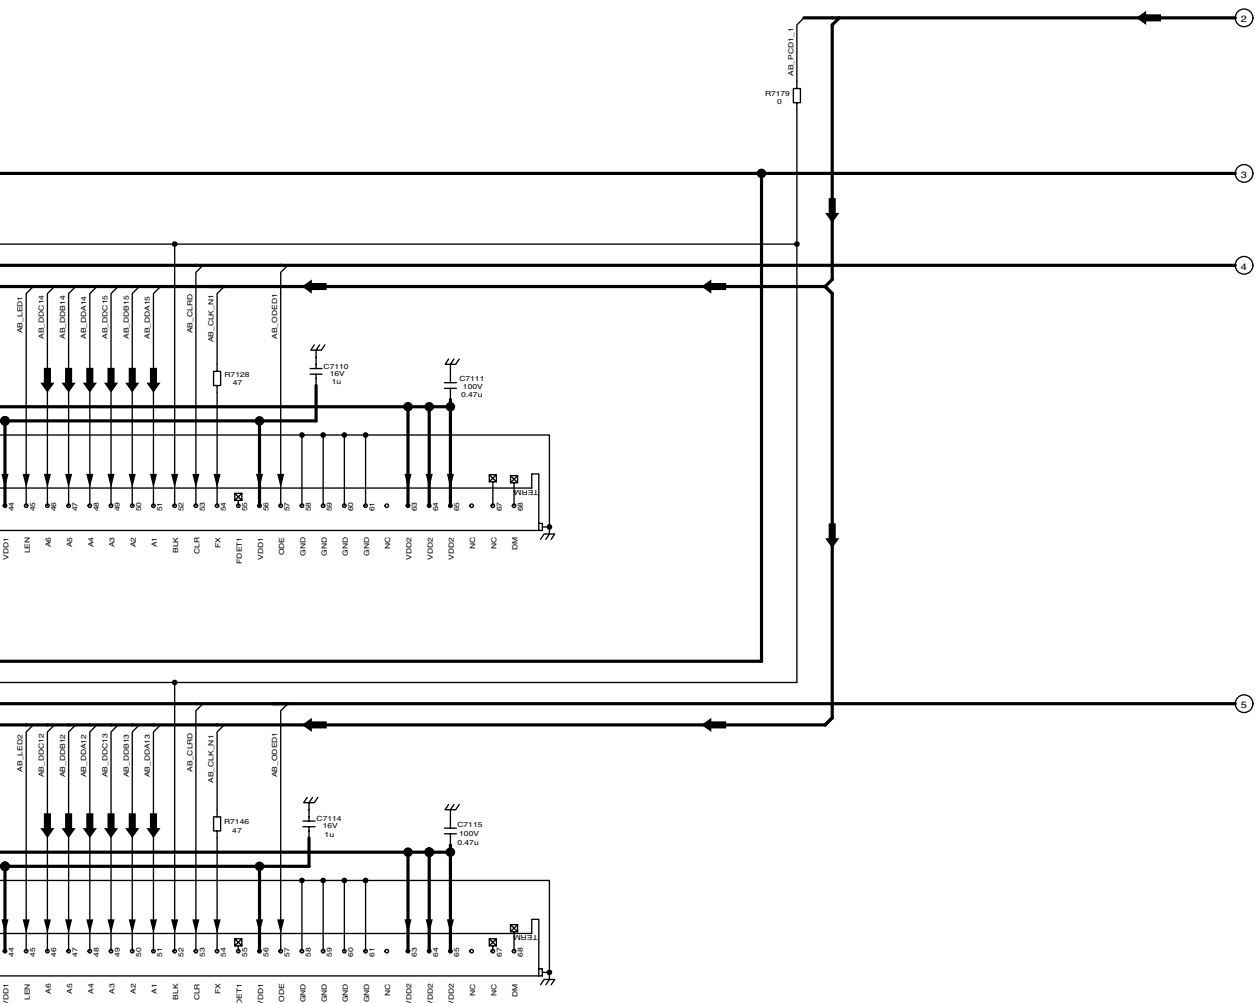

TH-42PV60A/H/M/MT
C1-Board (1 of 2) Schematic Diagram







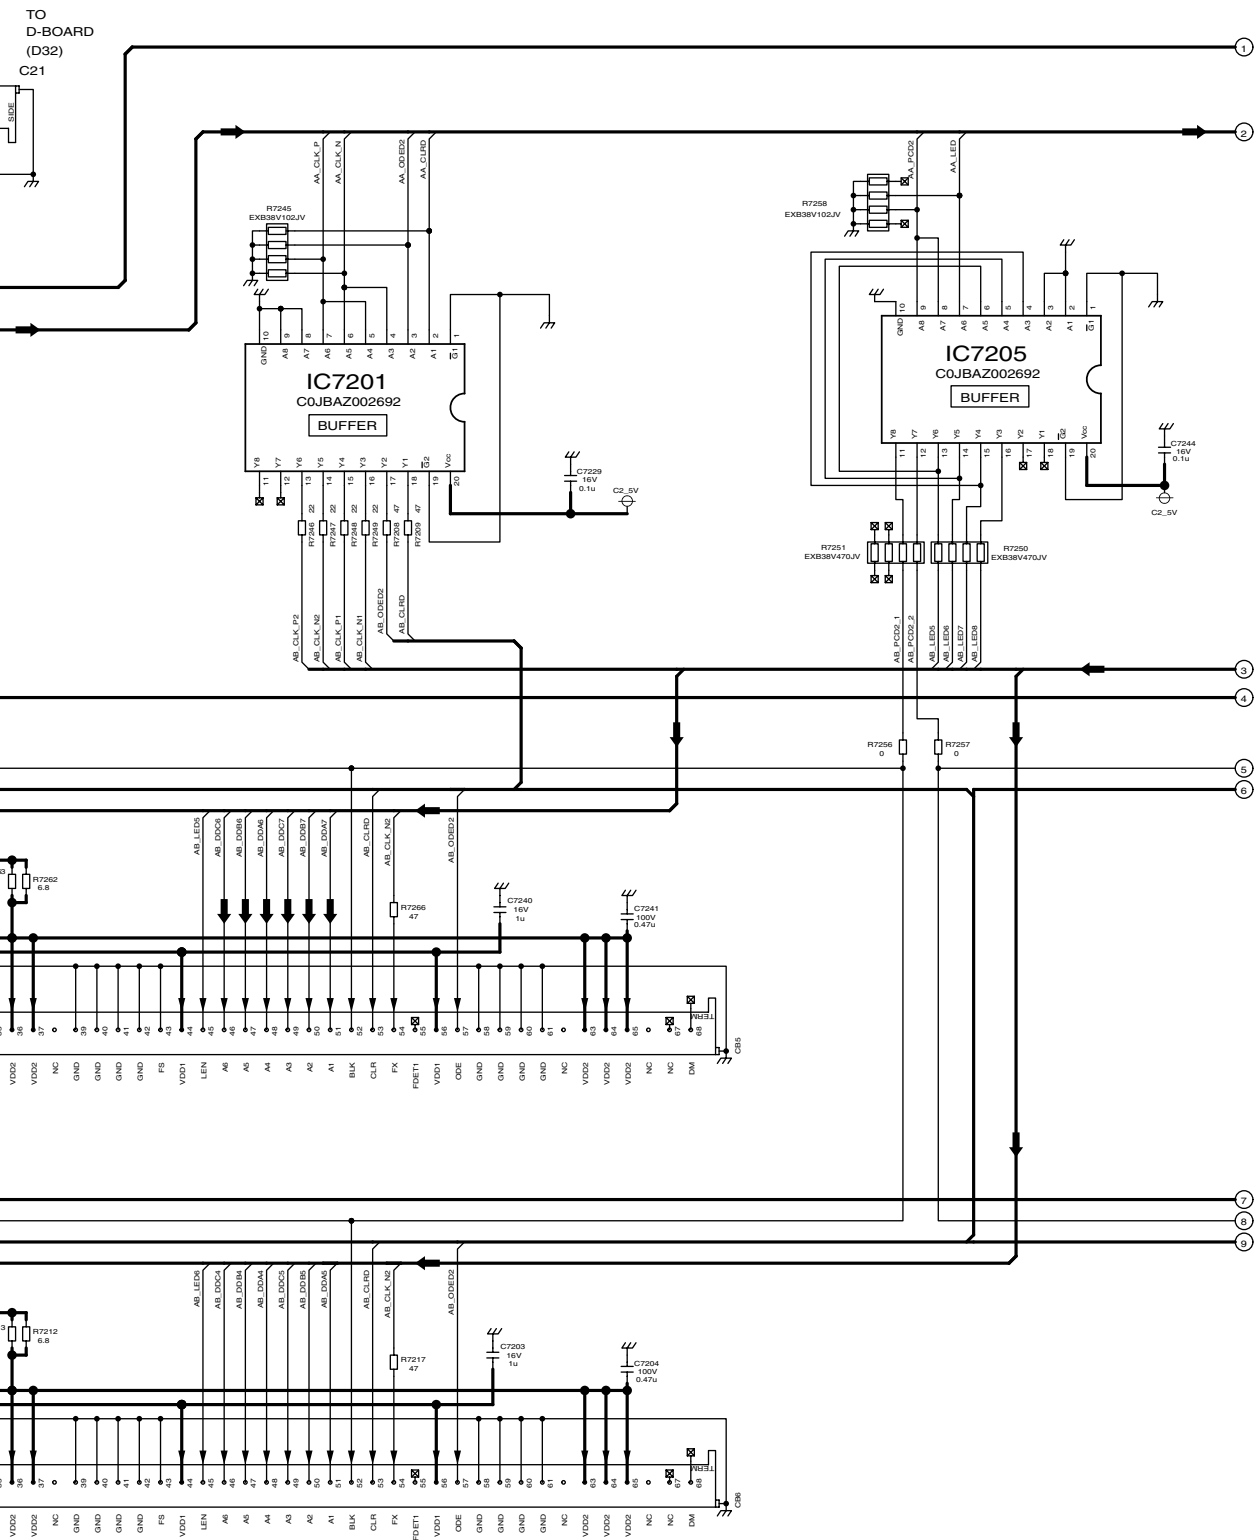


TH-42PV60A/H/M/MT
C2-Board (1 of 2) Schematic Diagram

14.43. C2-Board (2 of 2) Schematic Diagram

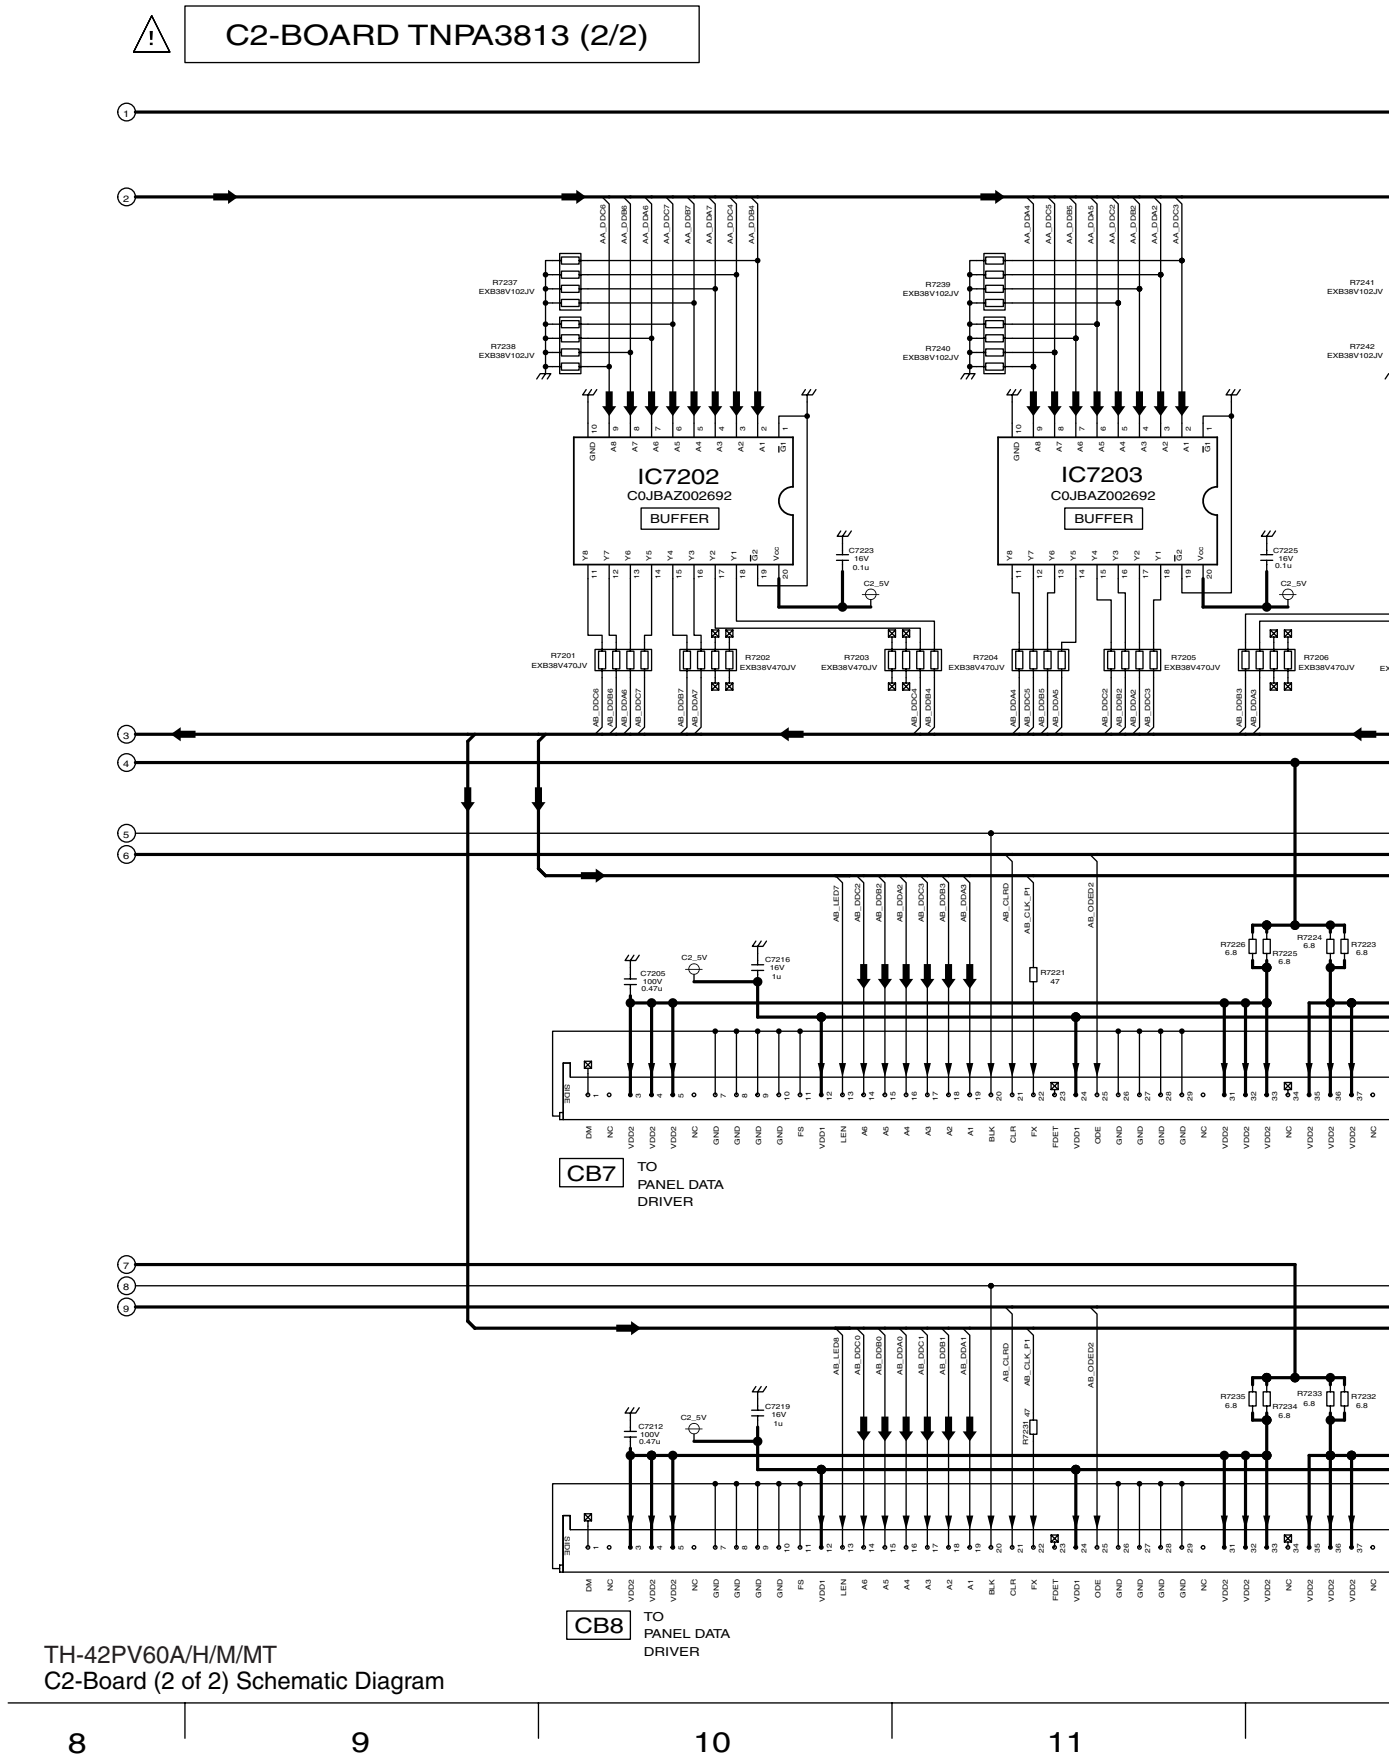




14.44. SC, SU and SD-Board Block Diagram

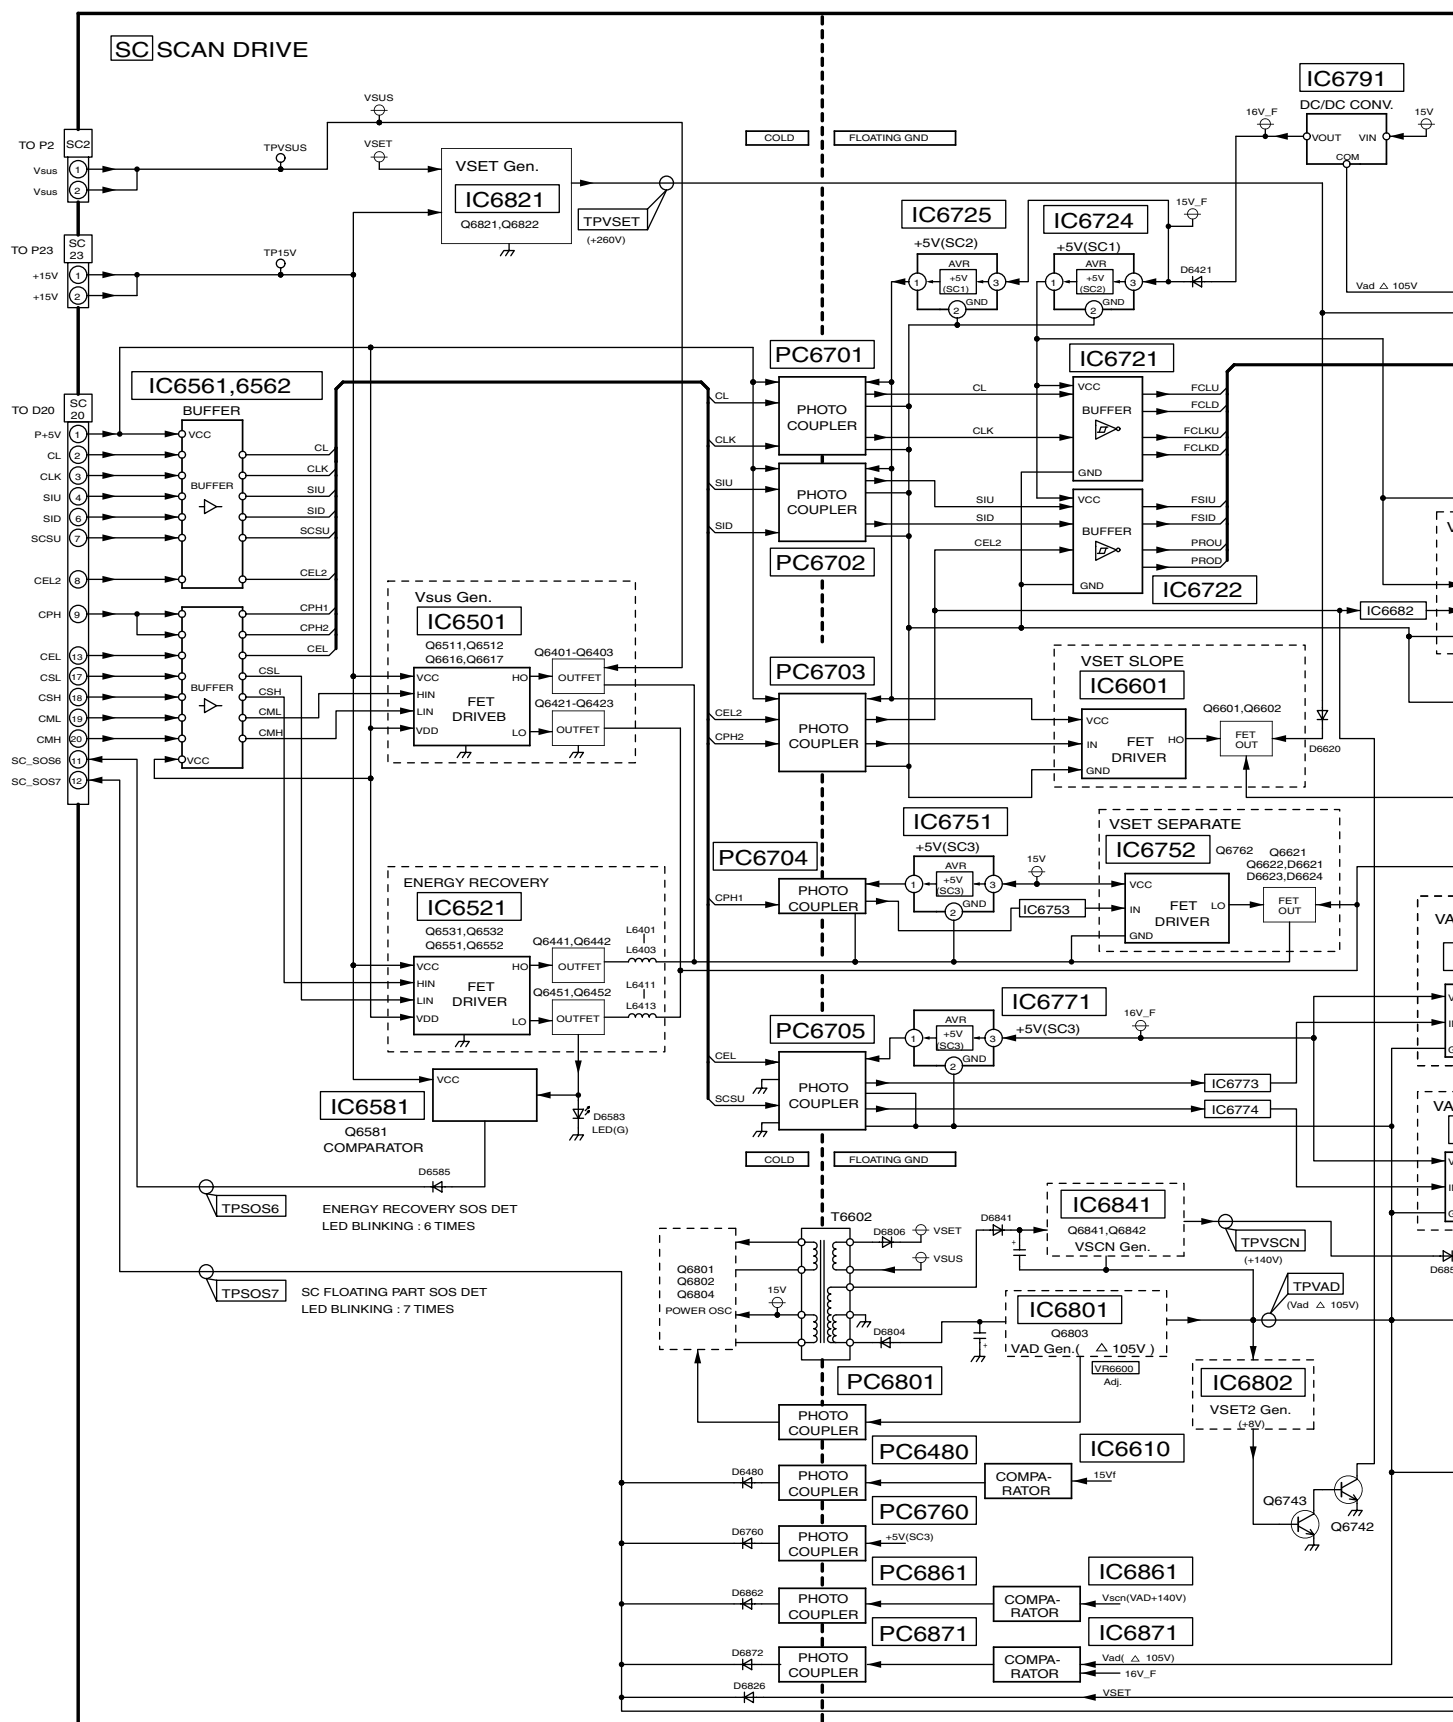

TH-42PV60A/H/M/MT
SC, SU and SD-Board Block Diagram

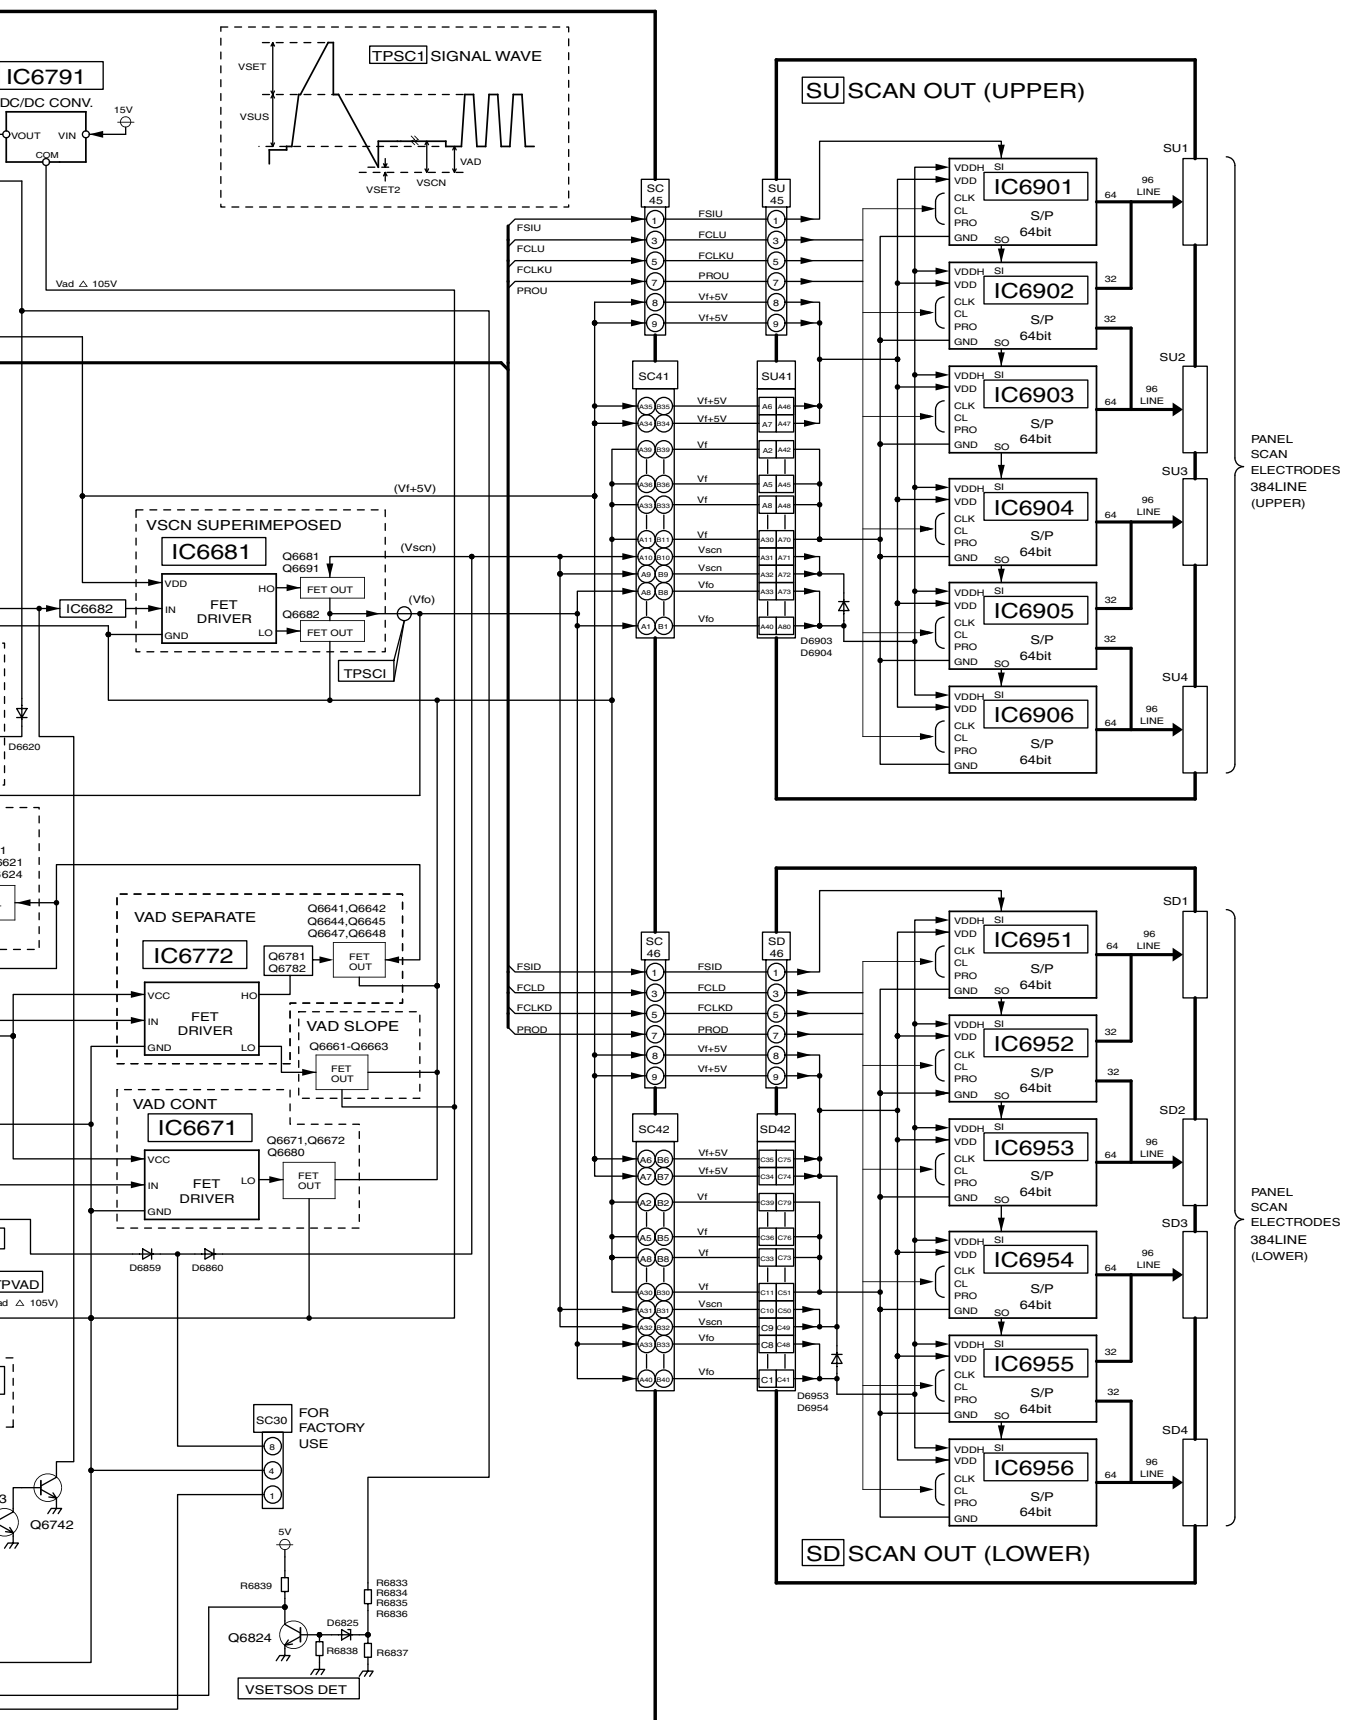

TH-42PV60A/H/M/MT
SC, SU and SD-Board Block Diagram

14.45. SC-Board (1 of 2) Schematic Diagram

A


B


C

D


E


F

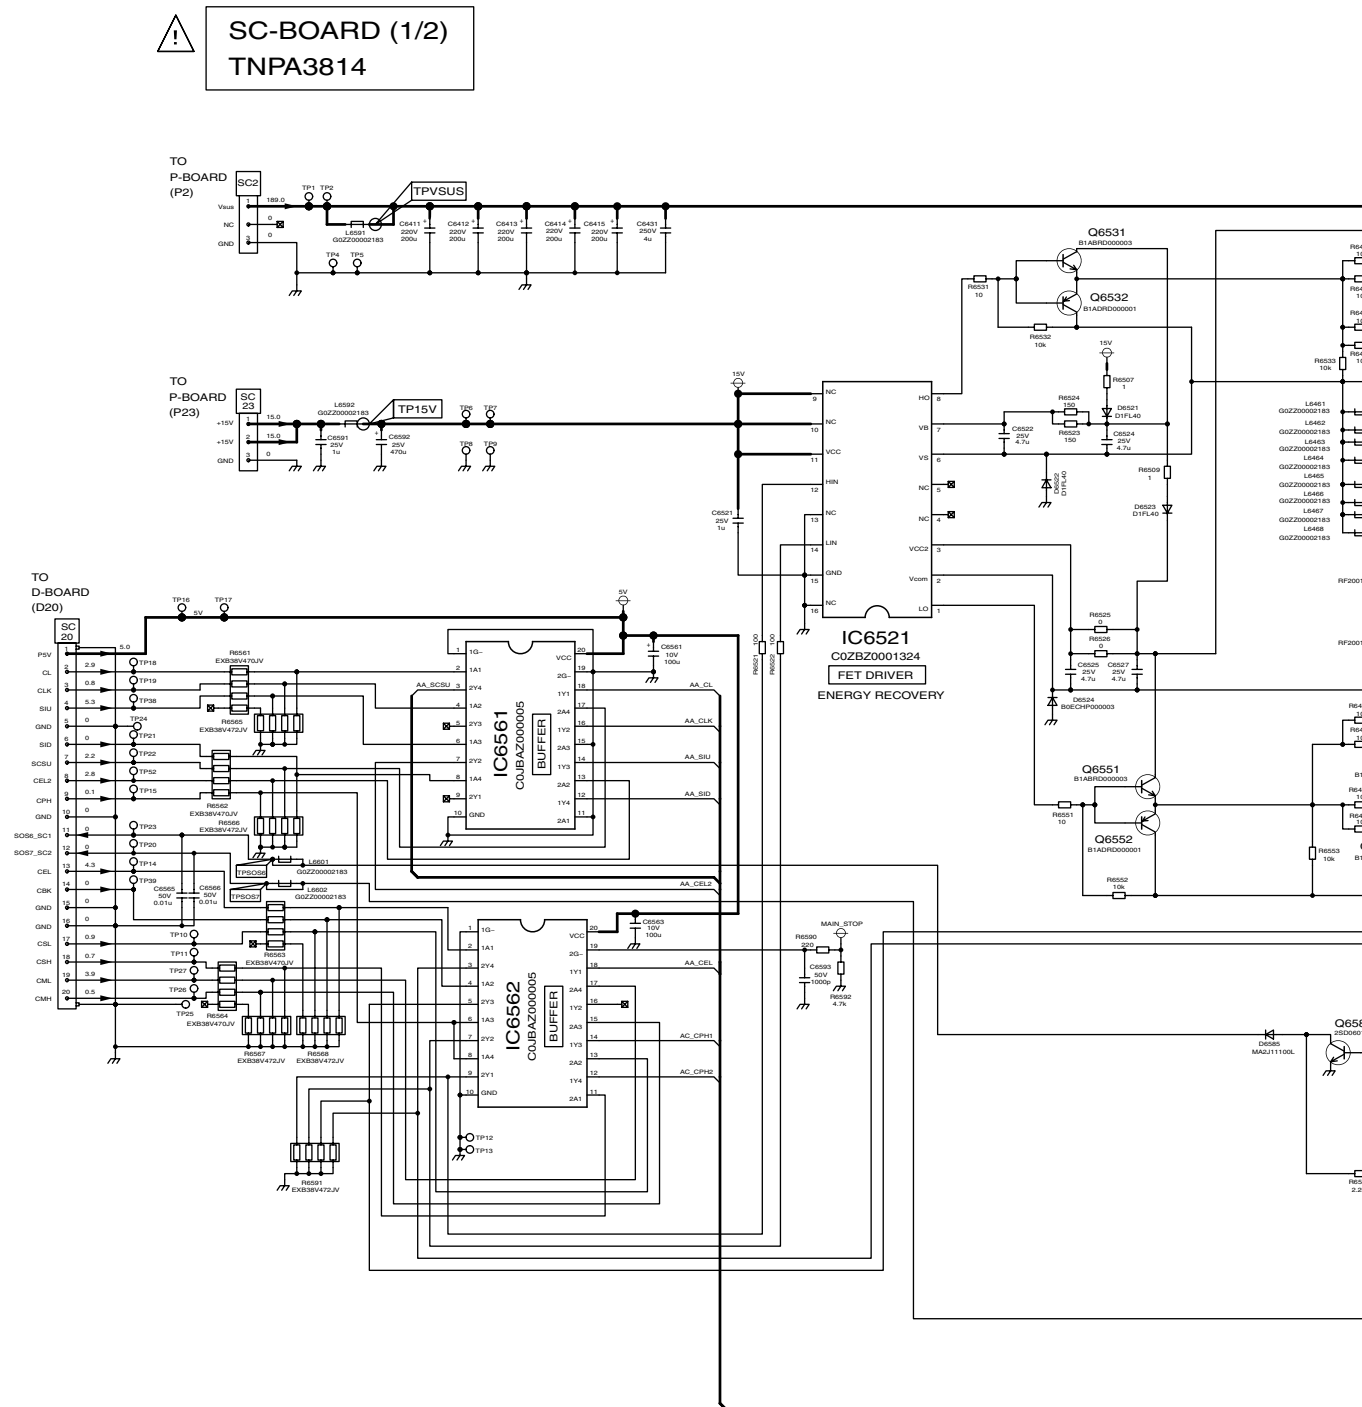

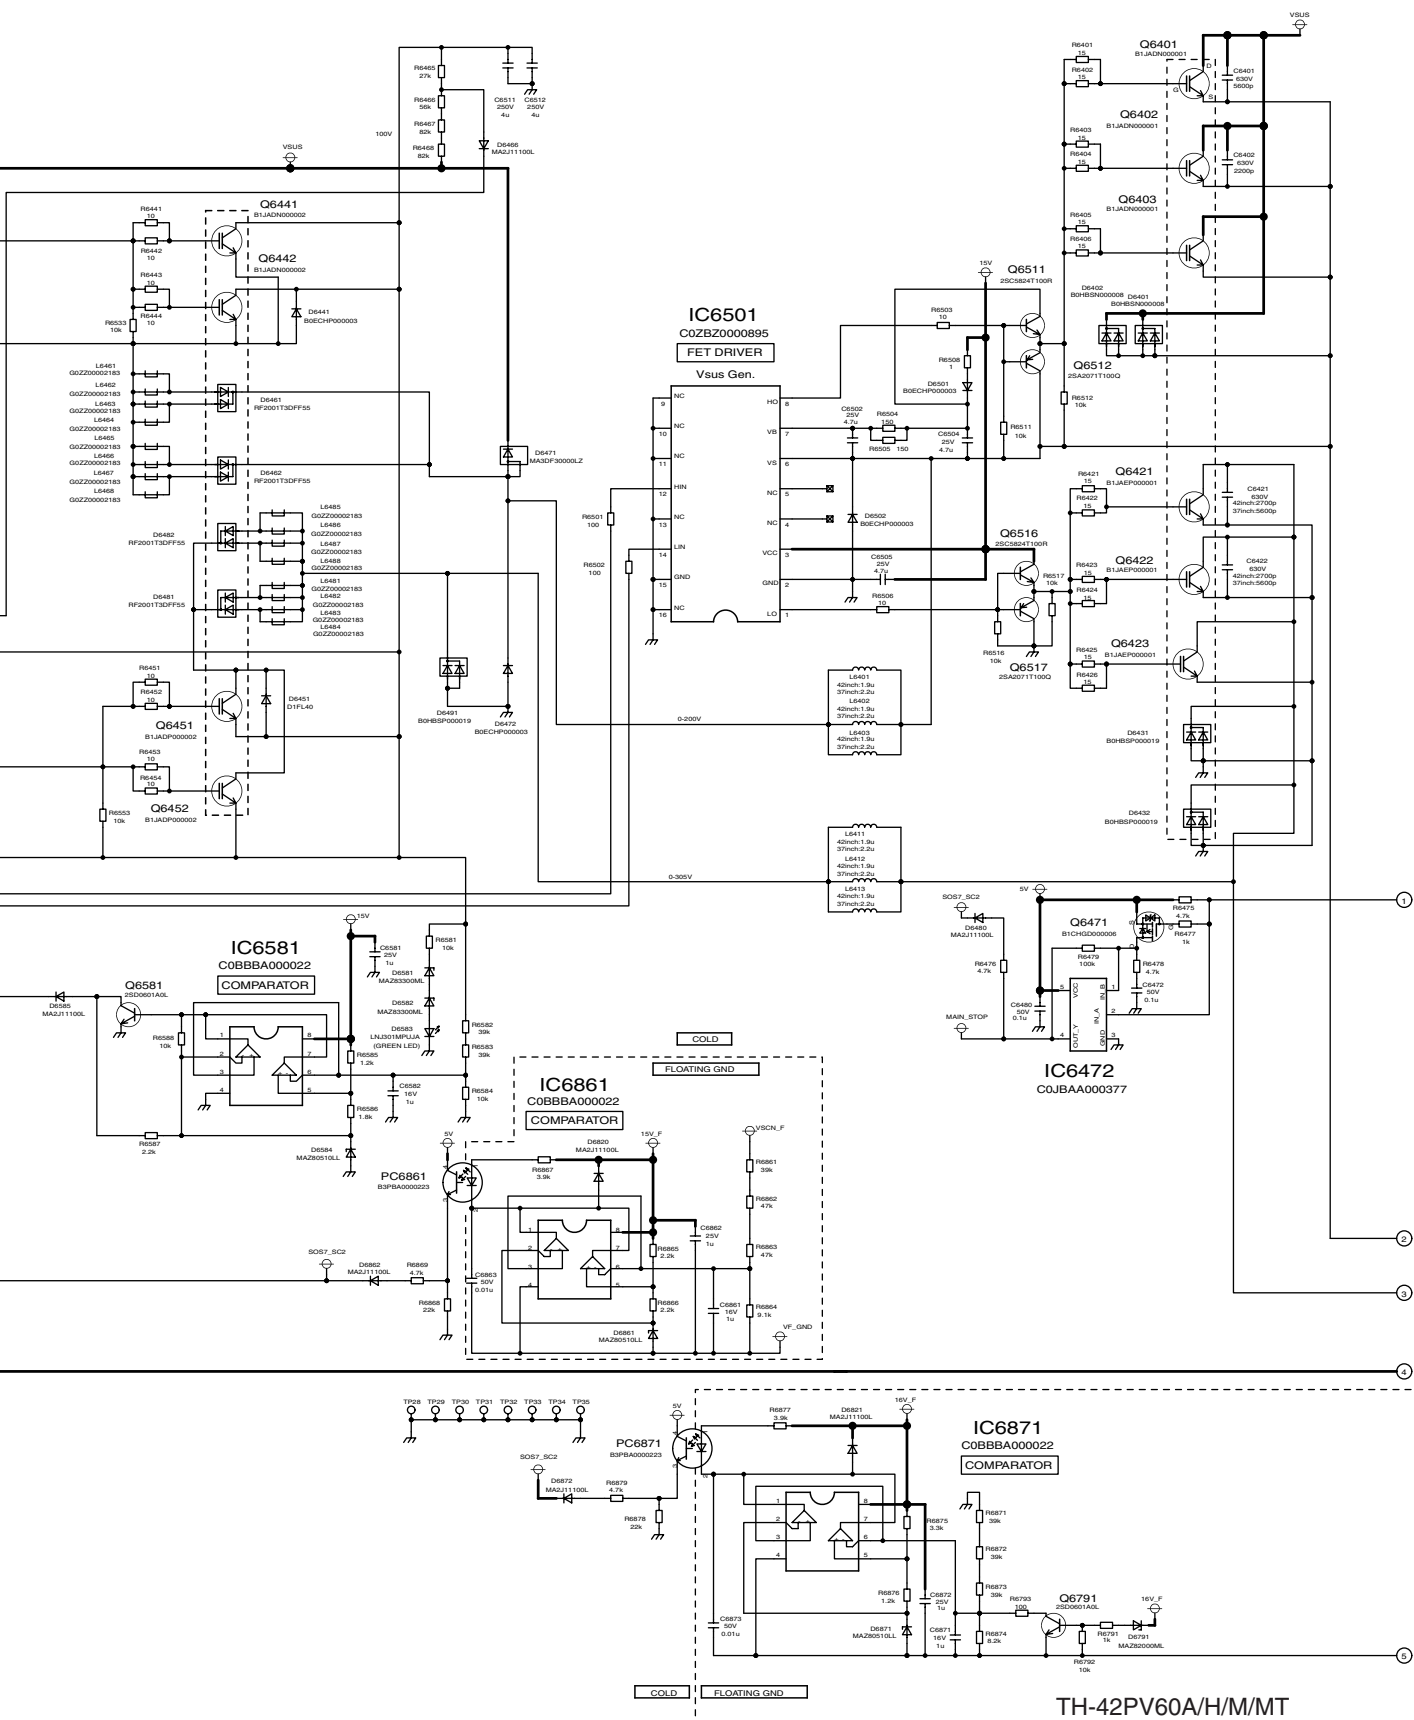

TH-42PV60A/H/M/MT
SC-Board (1 of 2) Schematic Diagram



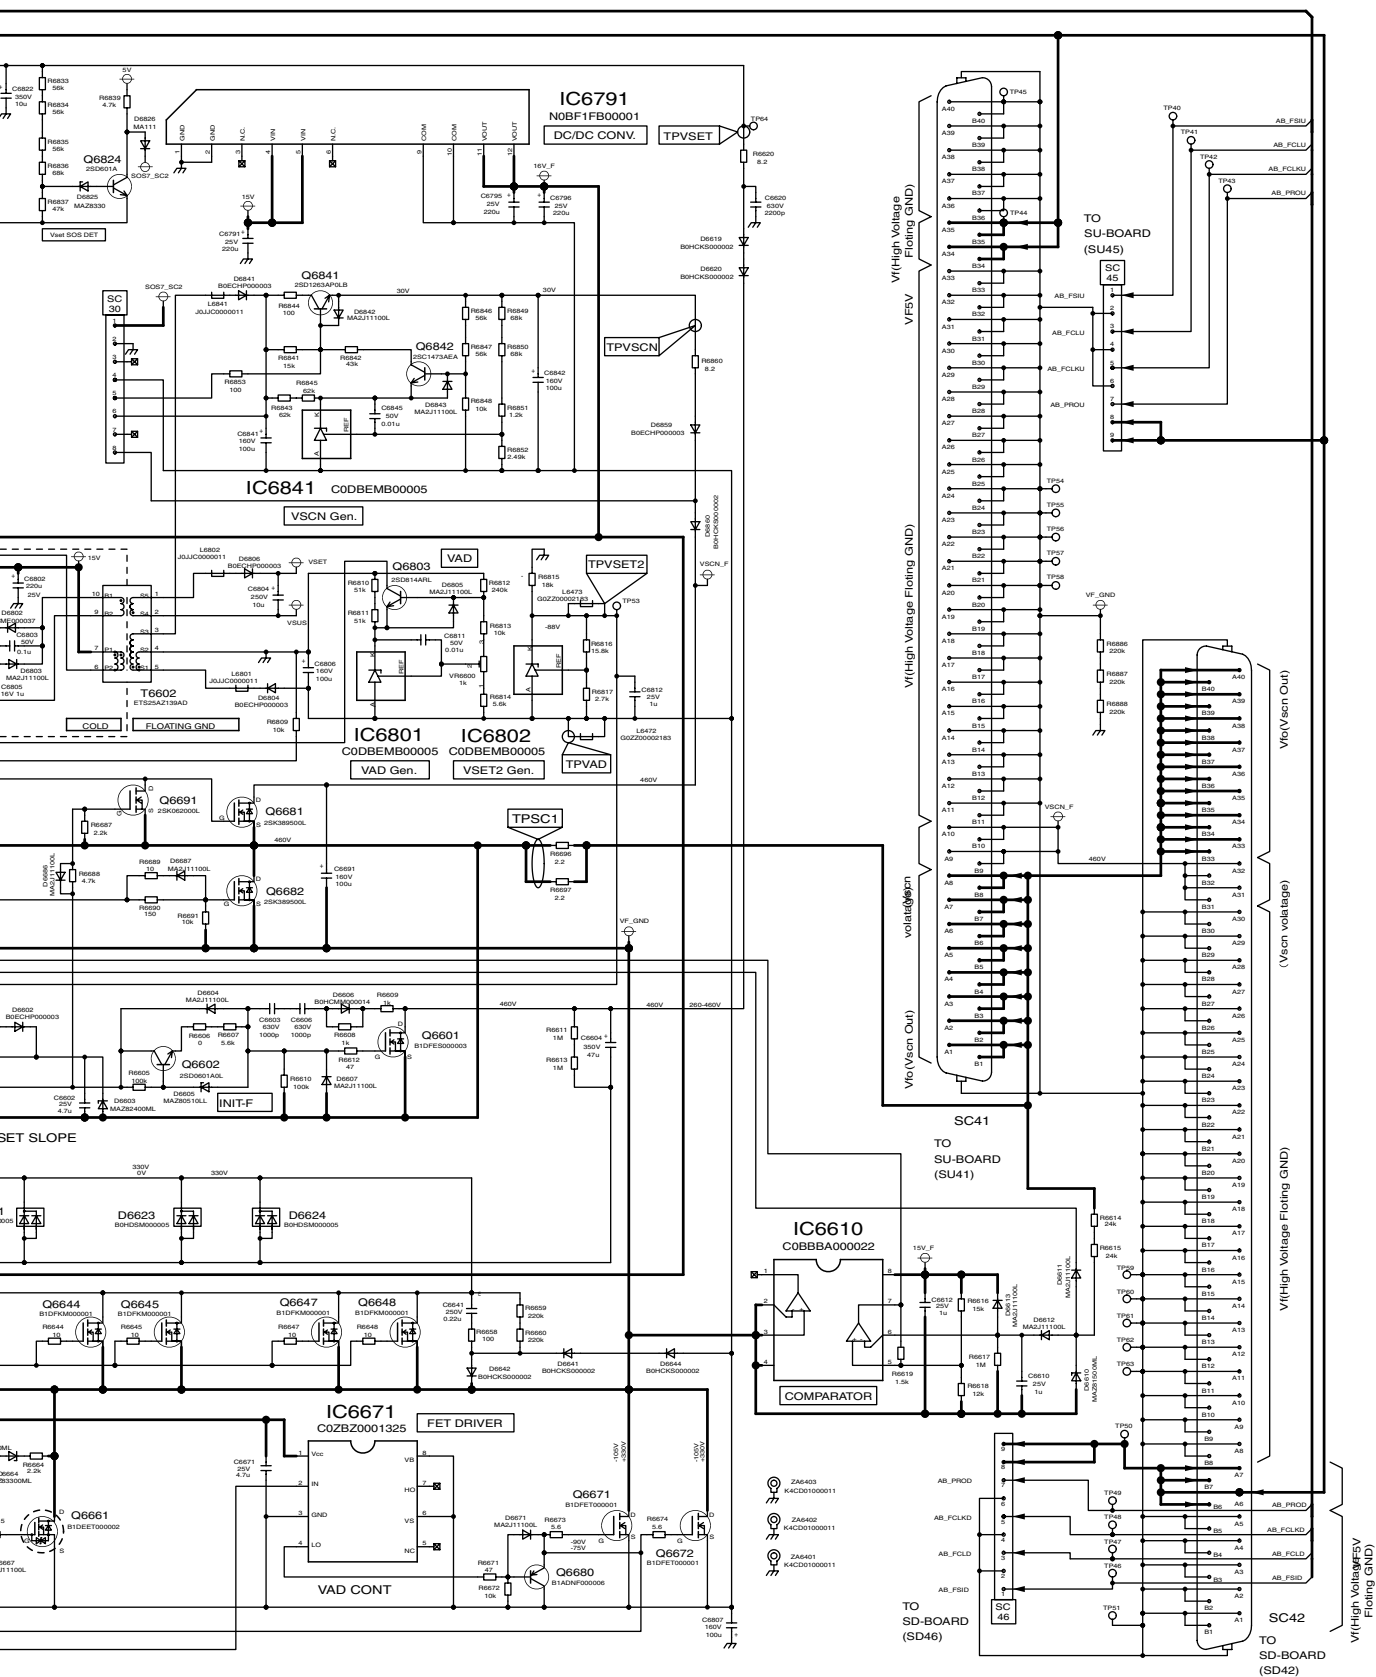

TH-42PV60A/H/M/MT
SC-Board (2 of 2) Schematic Diagram

14.47. SU-Board (1 of 2) Schematic Diagram



SU-BOARD TNPA3818 (1/2)

To 1st 96pins of
SCAN ELECTRODES


A

B

C

D

E

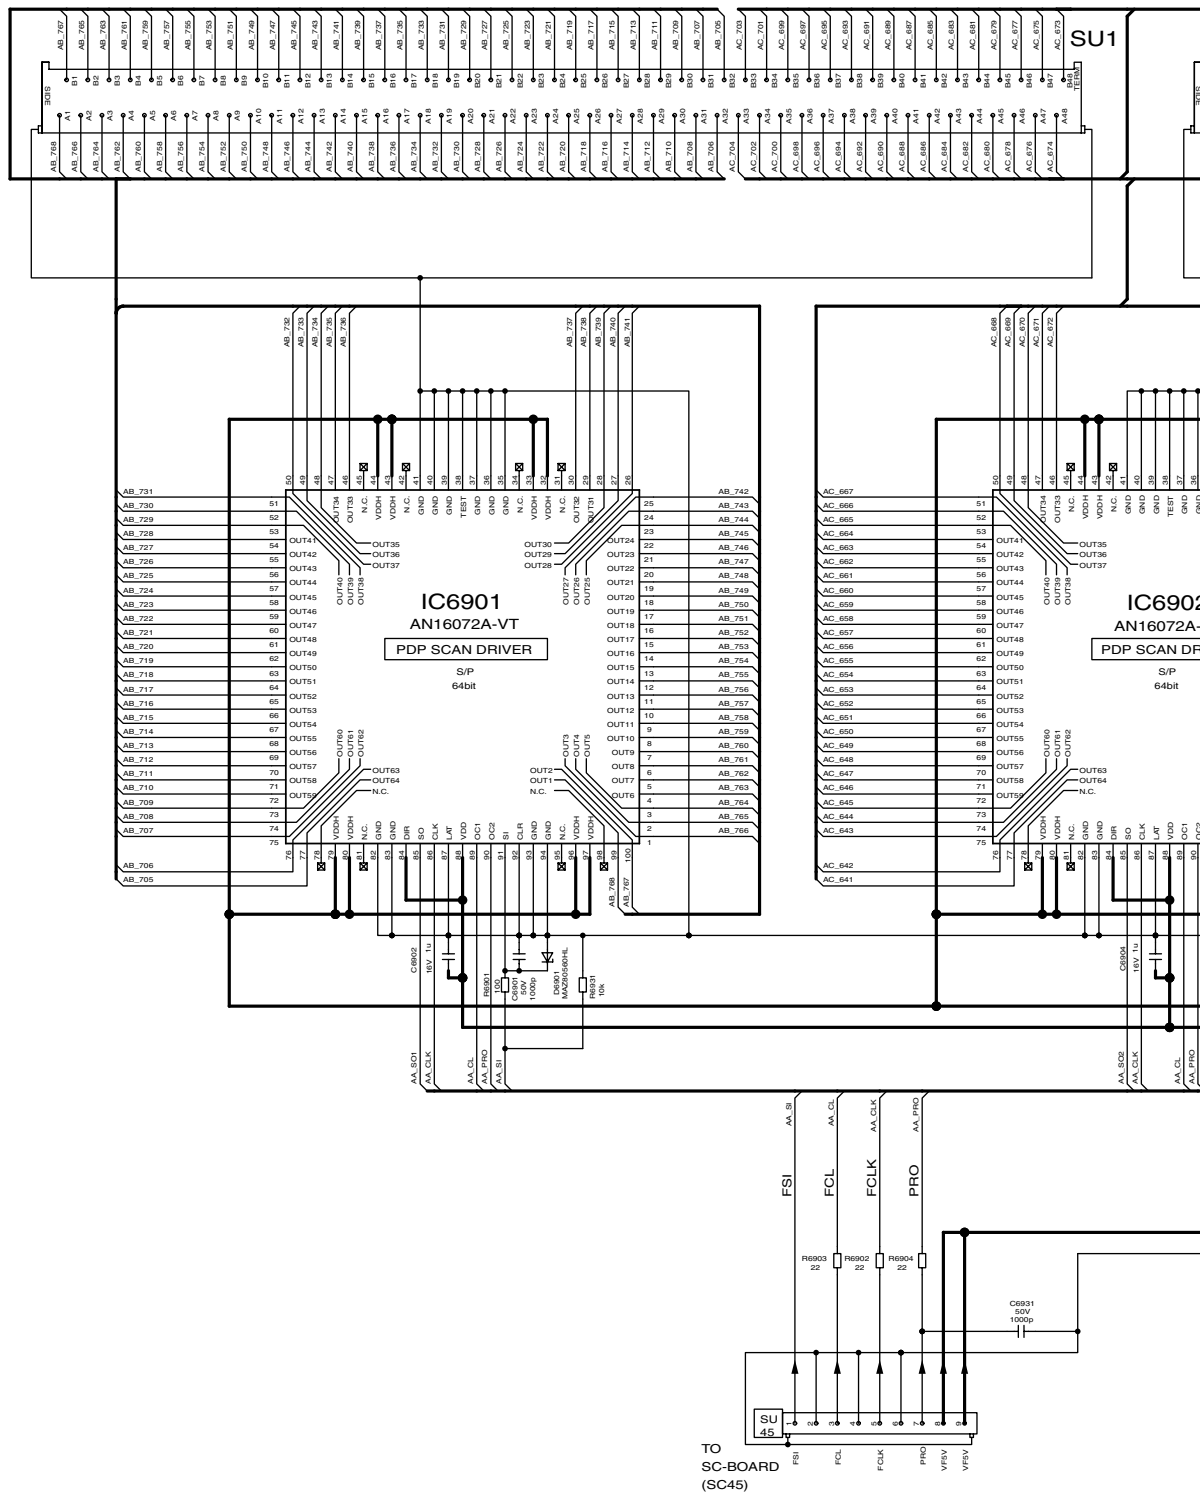


TH-42PV60A/H/M/MT
SU-Board (1 of 2) Schematic Diagram

1


2

3

4

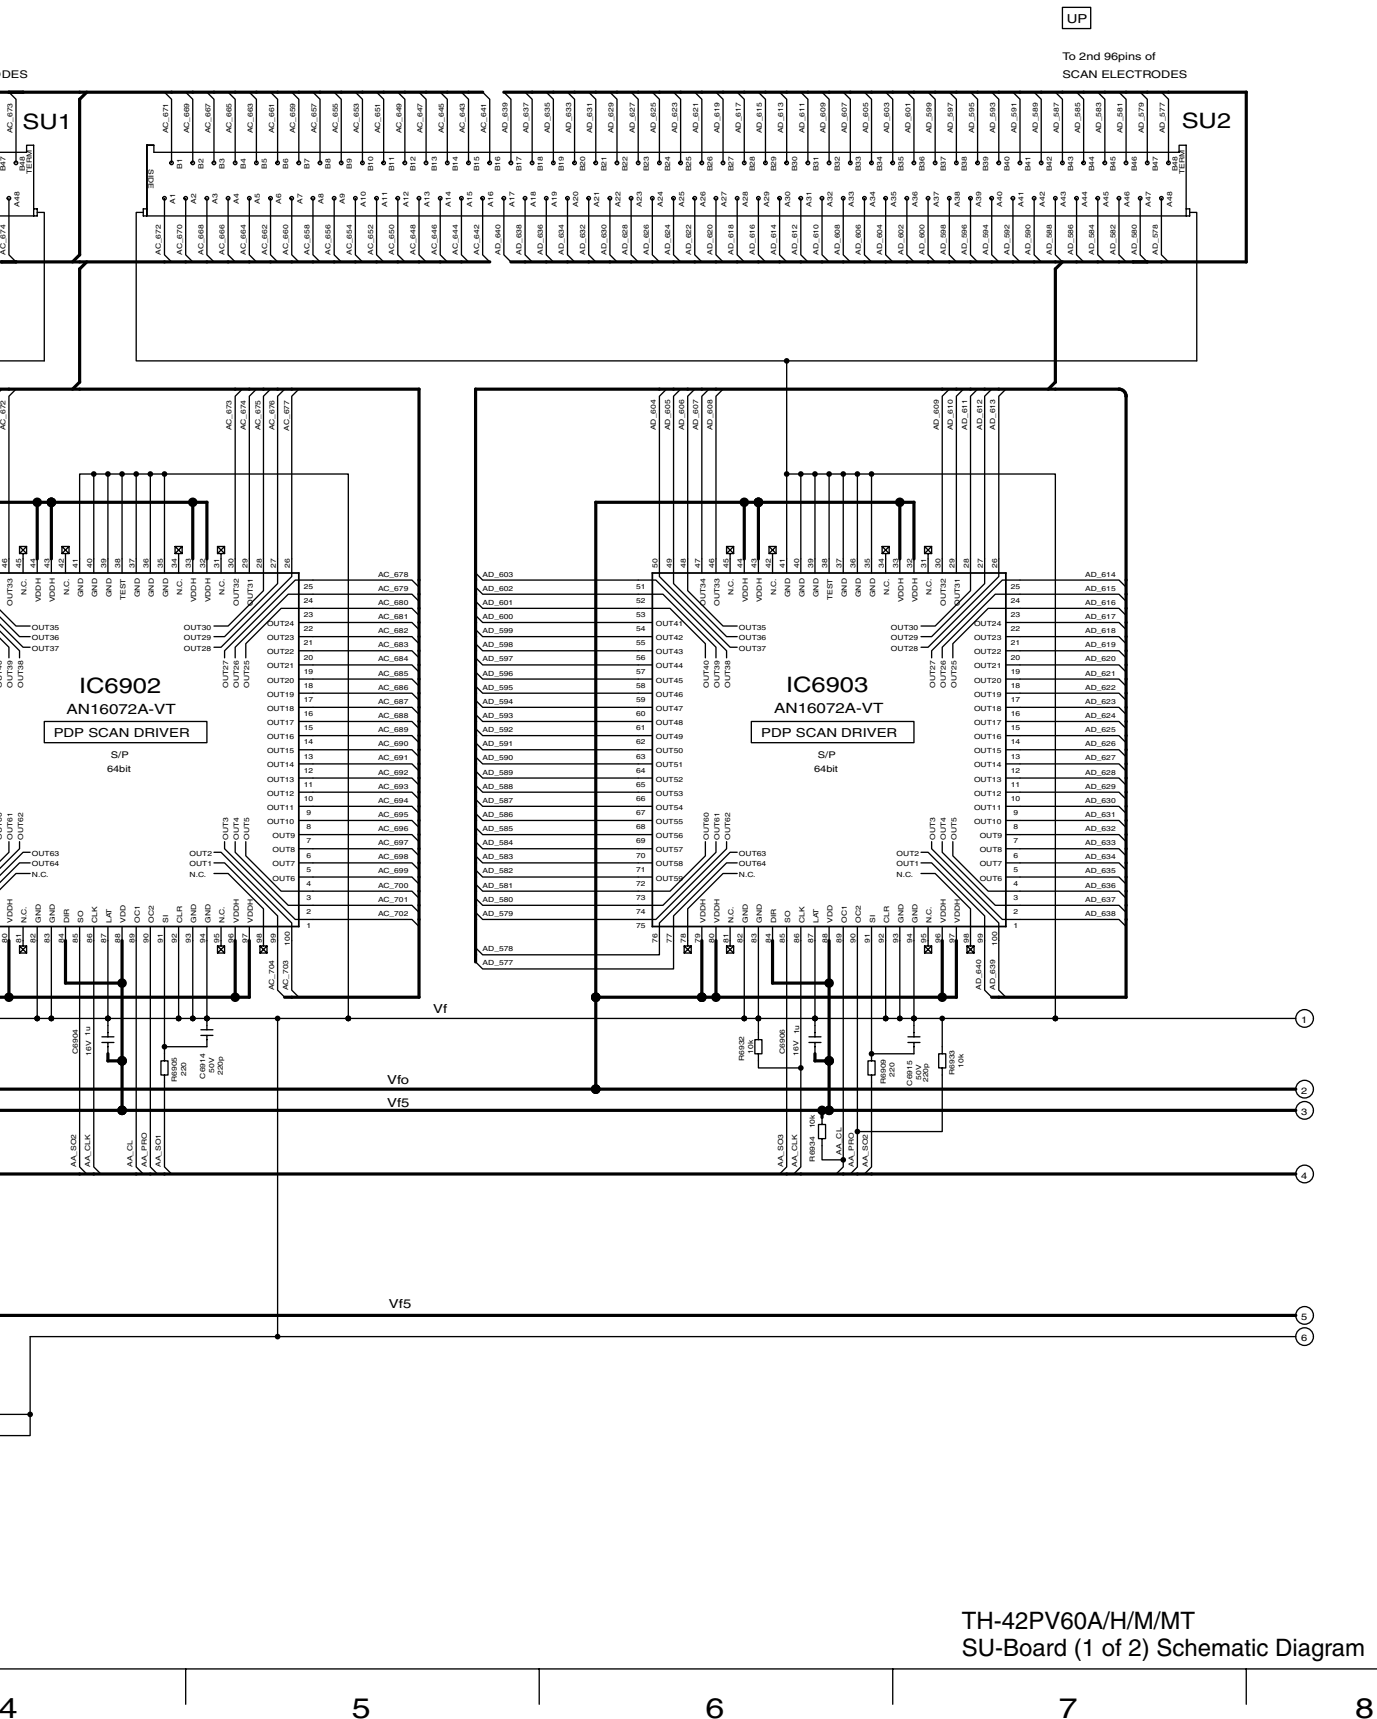

14.48. SU-Board (2 of 2) Schematic Diagram

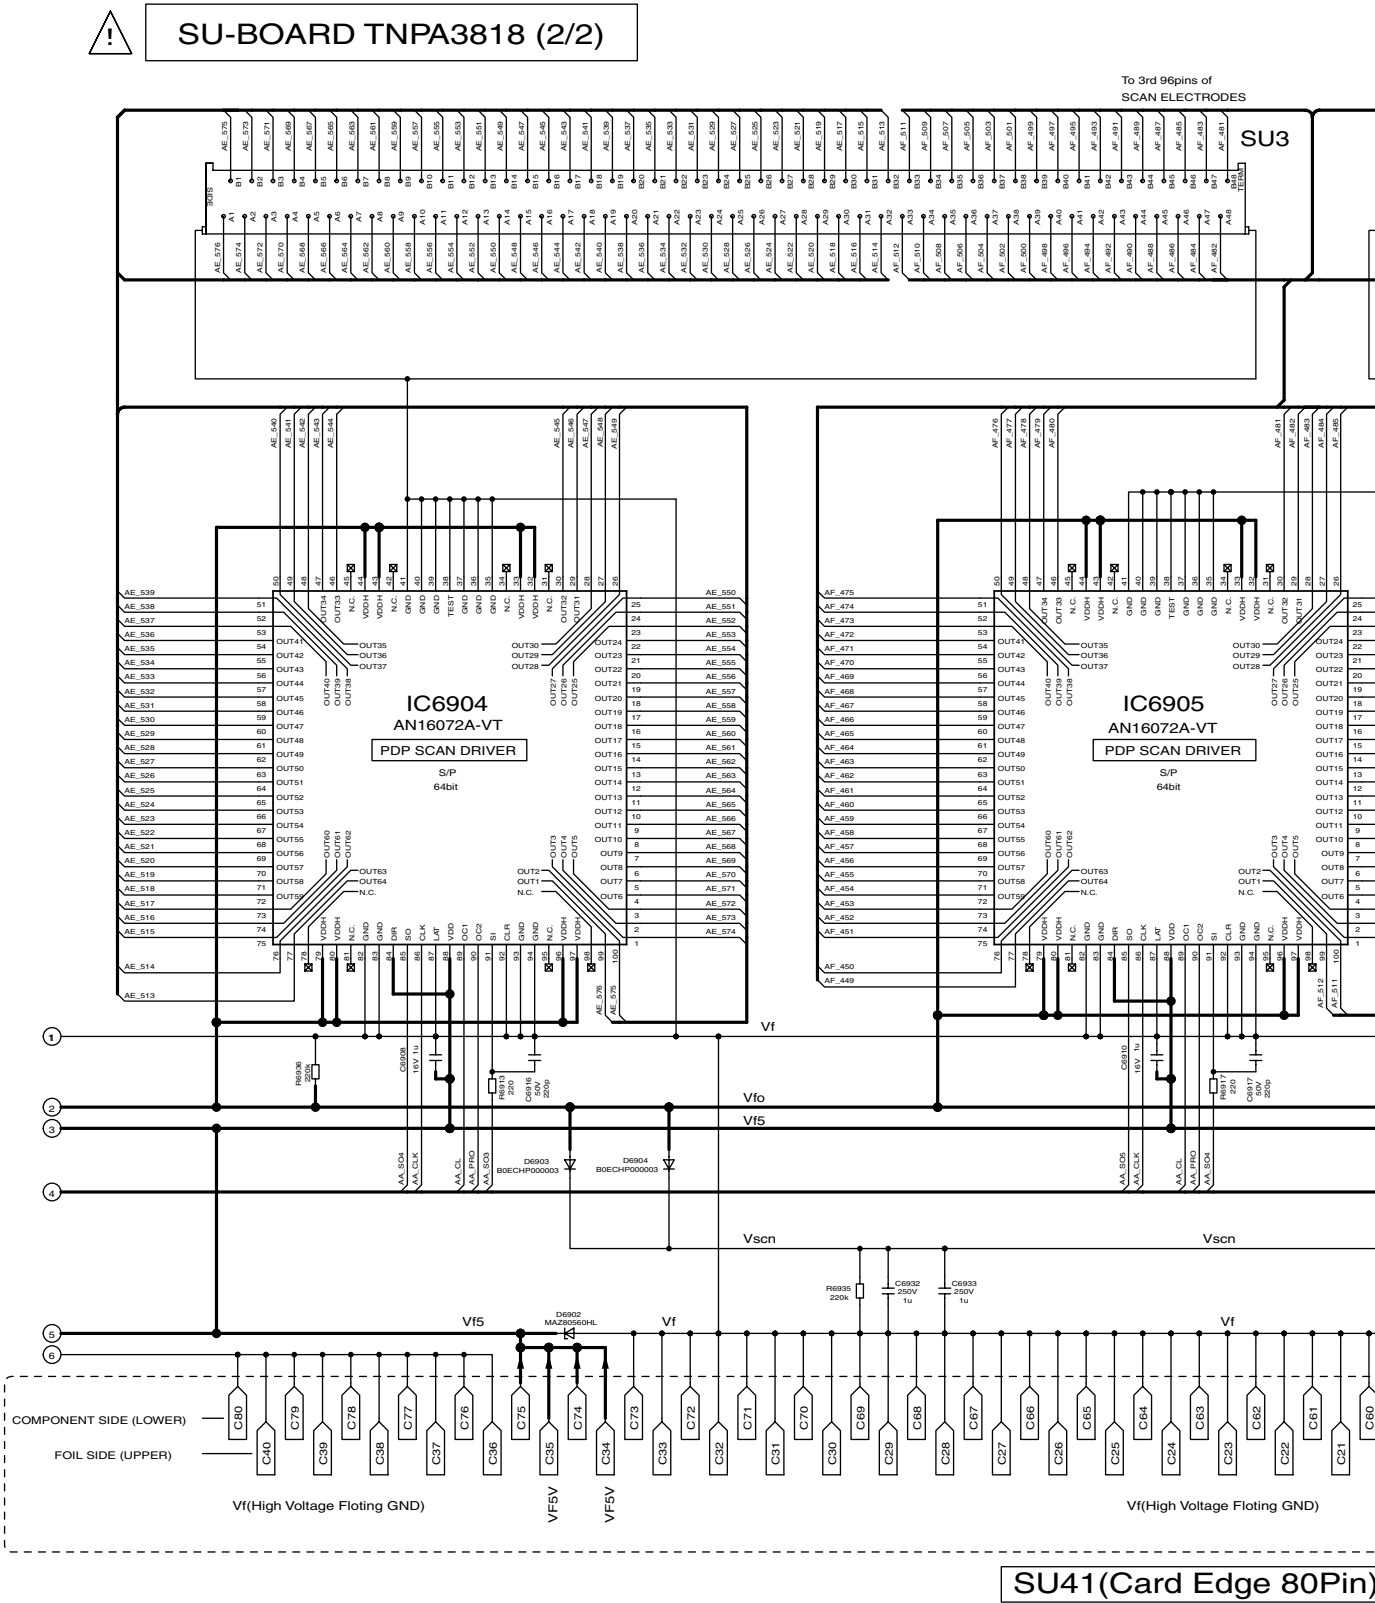

TH-42PV60A/H/M/MT
SU-Board (2 of 2) Schematic Diagram

8

9


10


11


12



of
TRODES

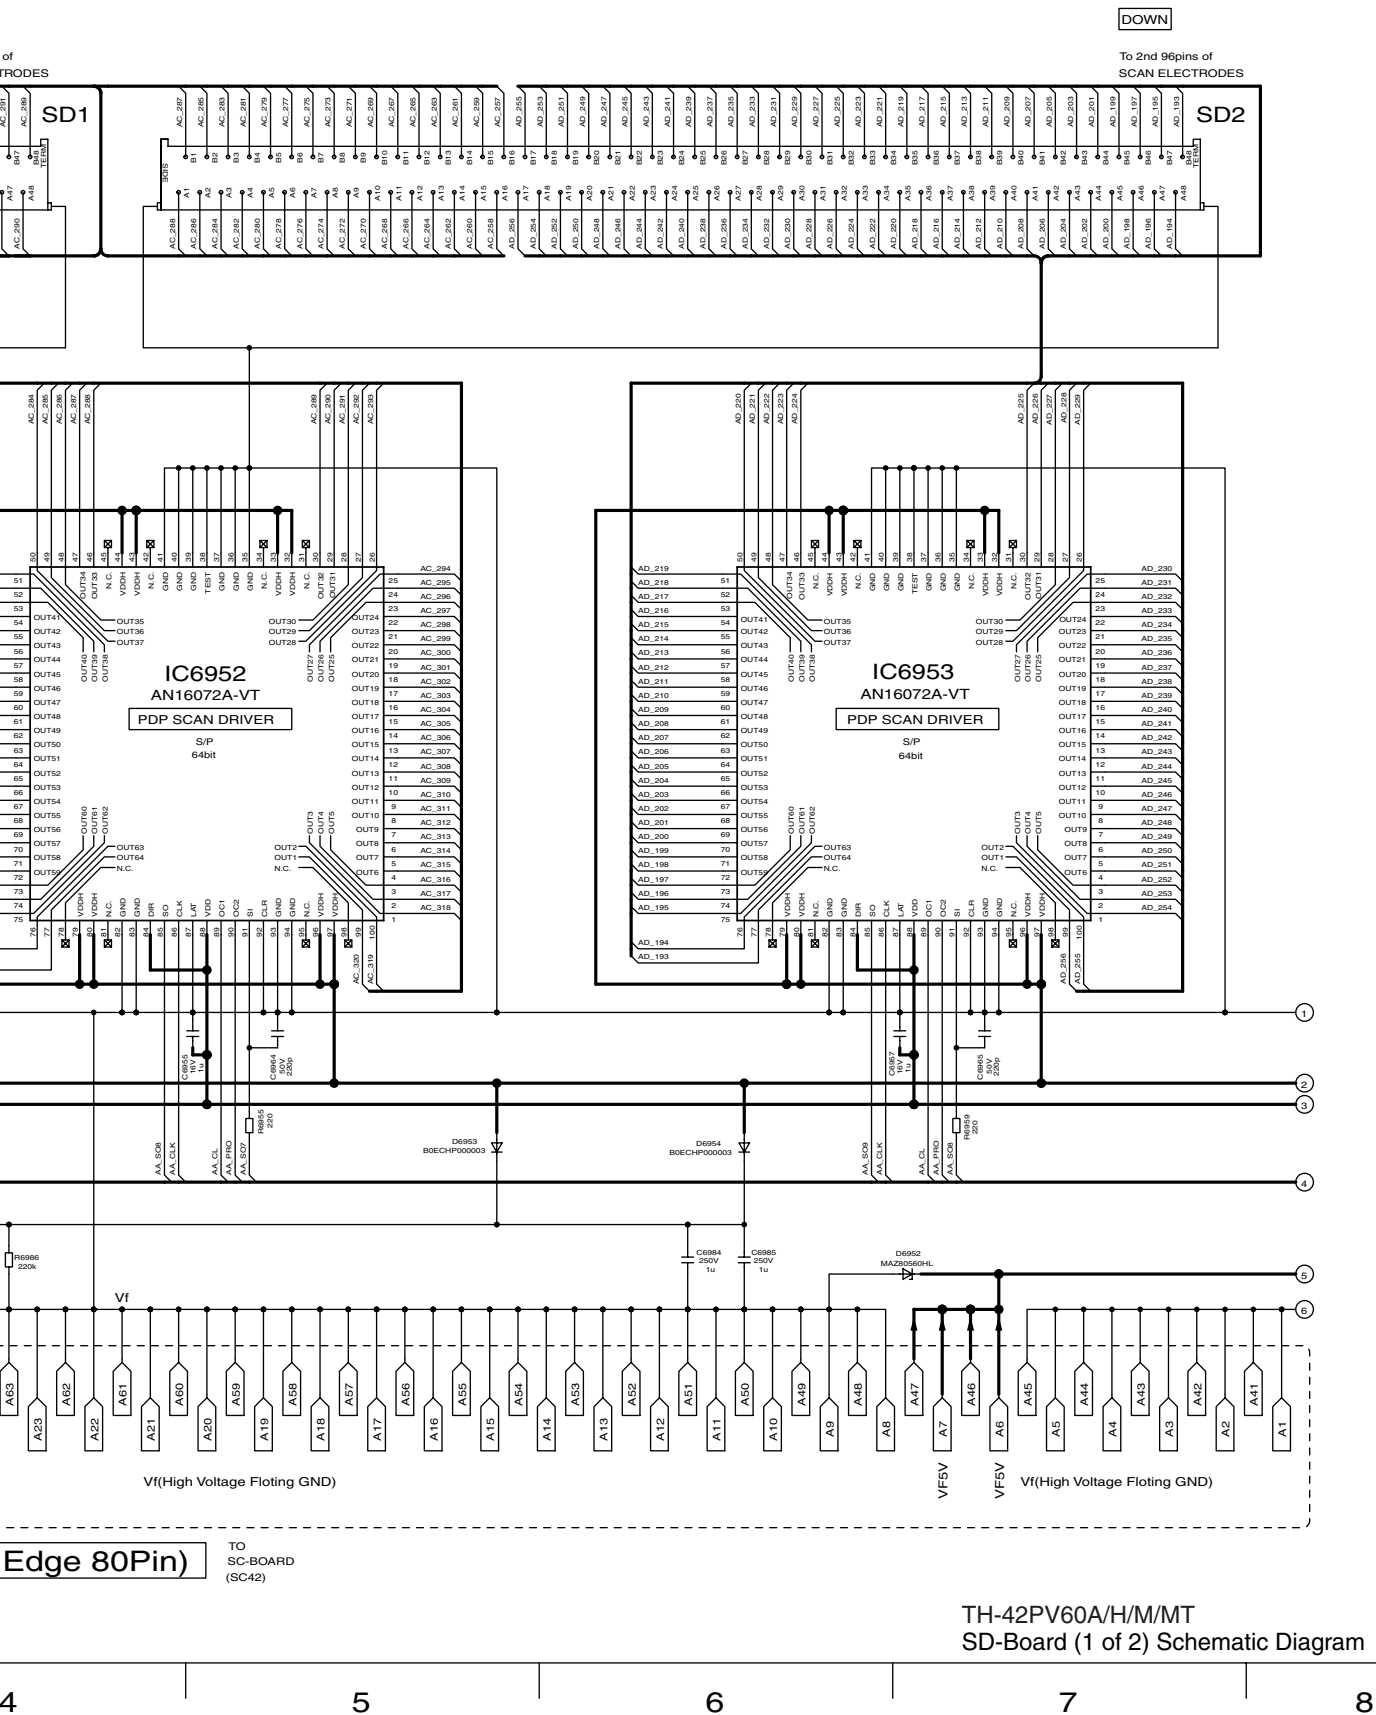



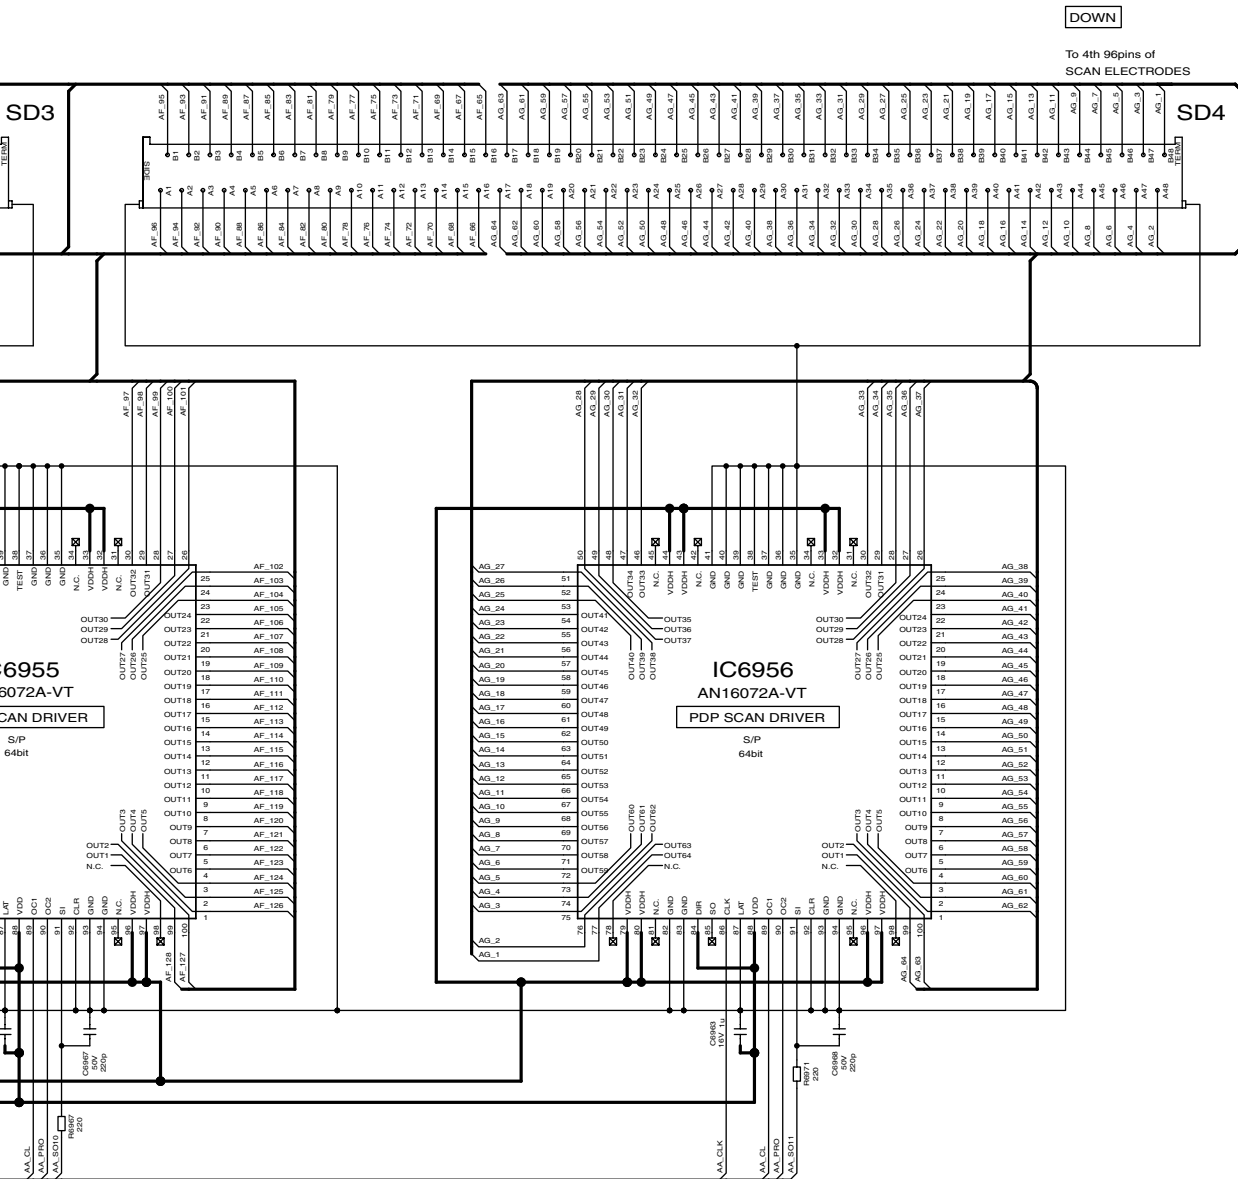

TH-42PV60A/H/M/MT
SD-Board (2 of 2) Schematic Diagram


12


13

14

15


14.51. SS and S-Board Block Diagram

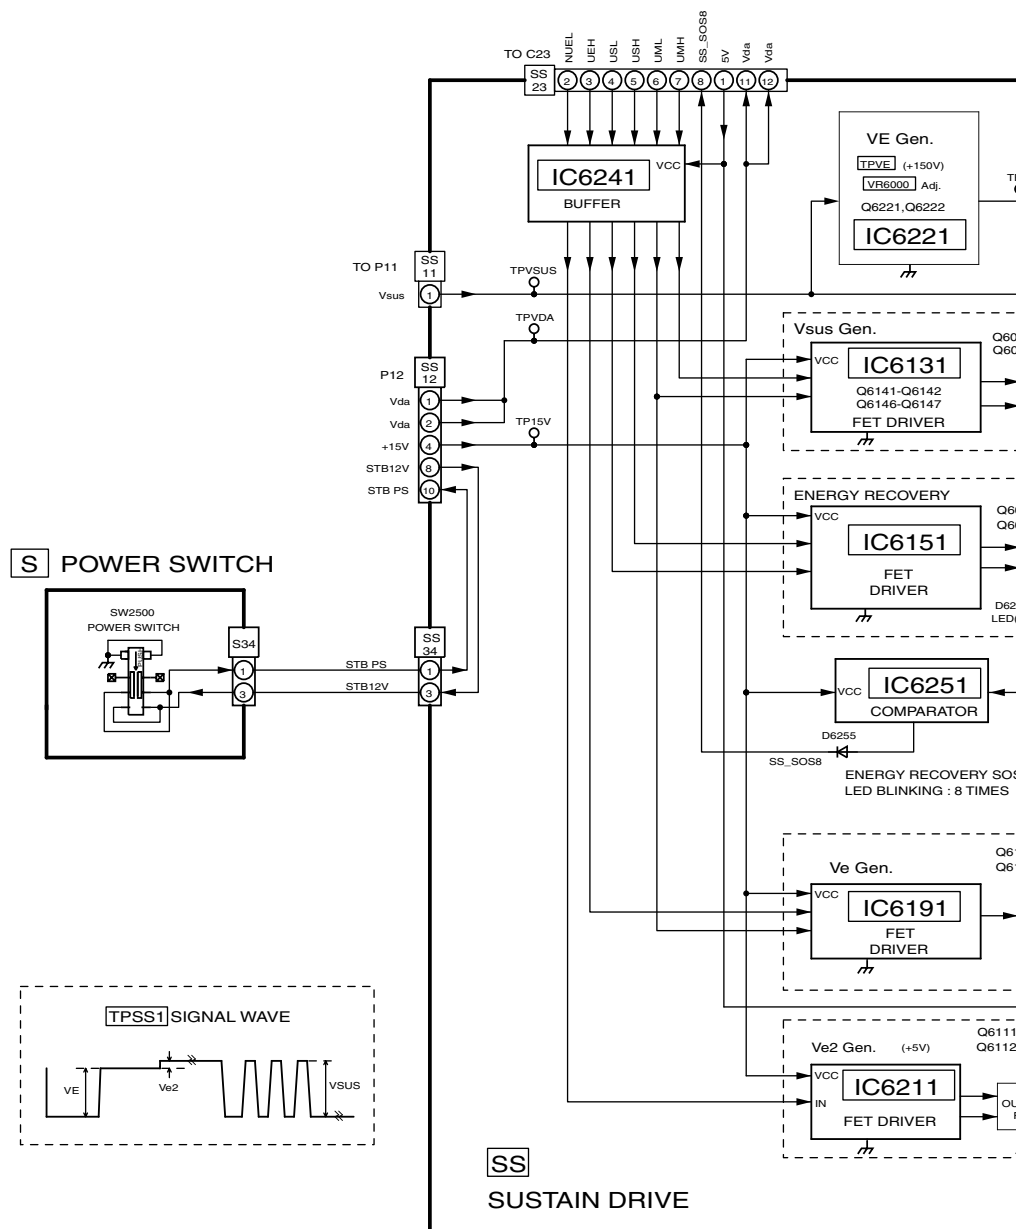


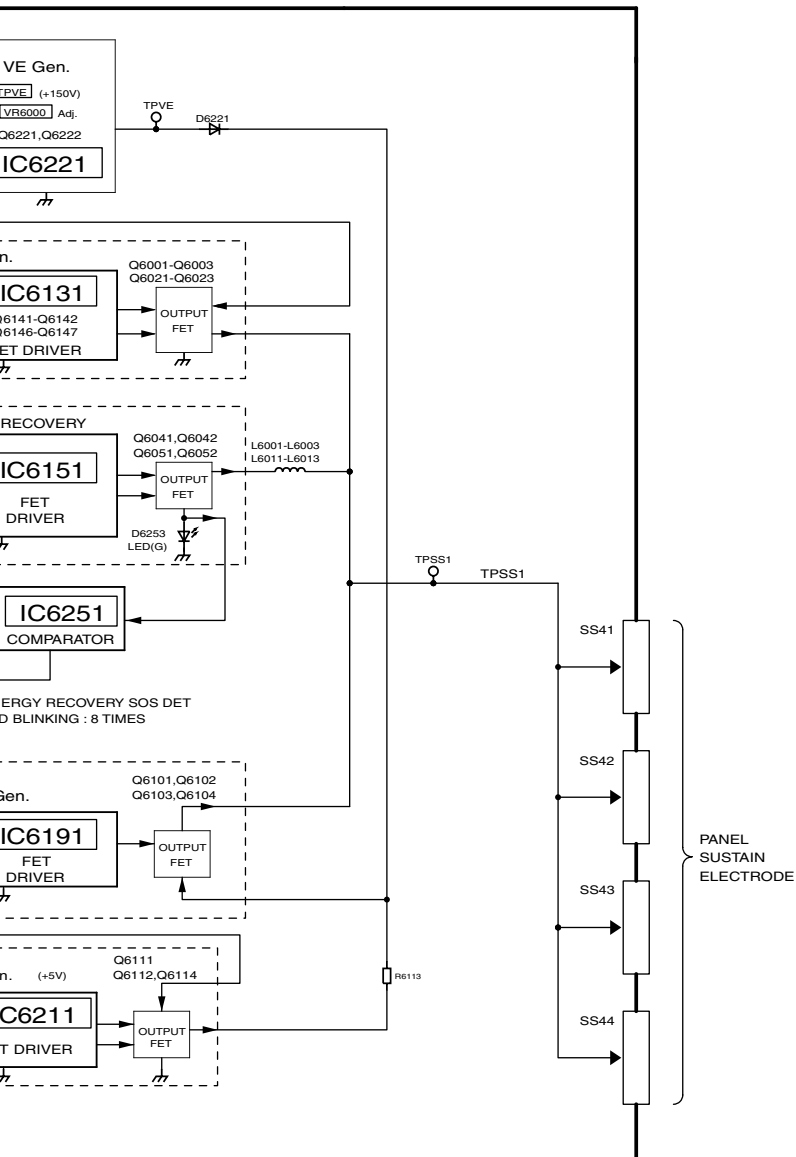

TH-42PV60A/H/M/MT
SS and S-Board Block Diagram

14.52. SS and S-Board Schematic Diagram

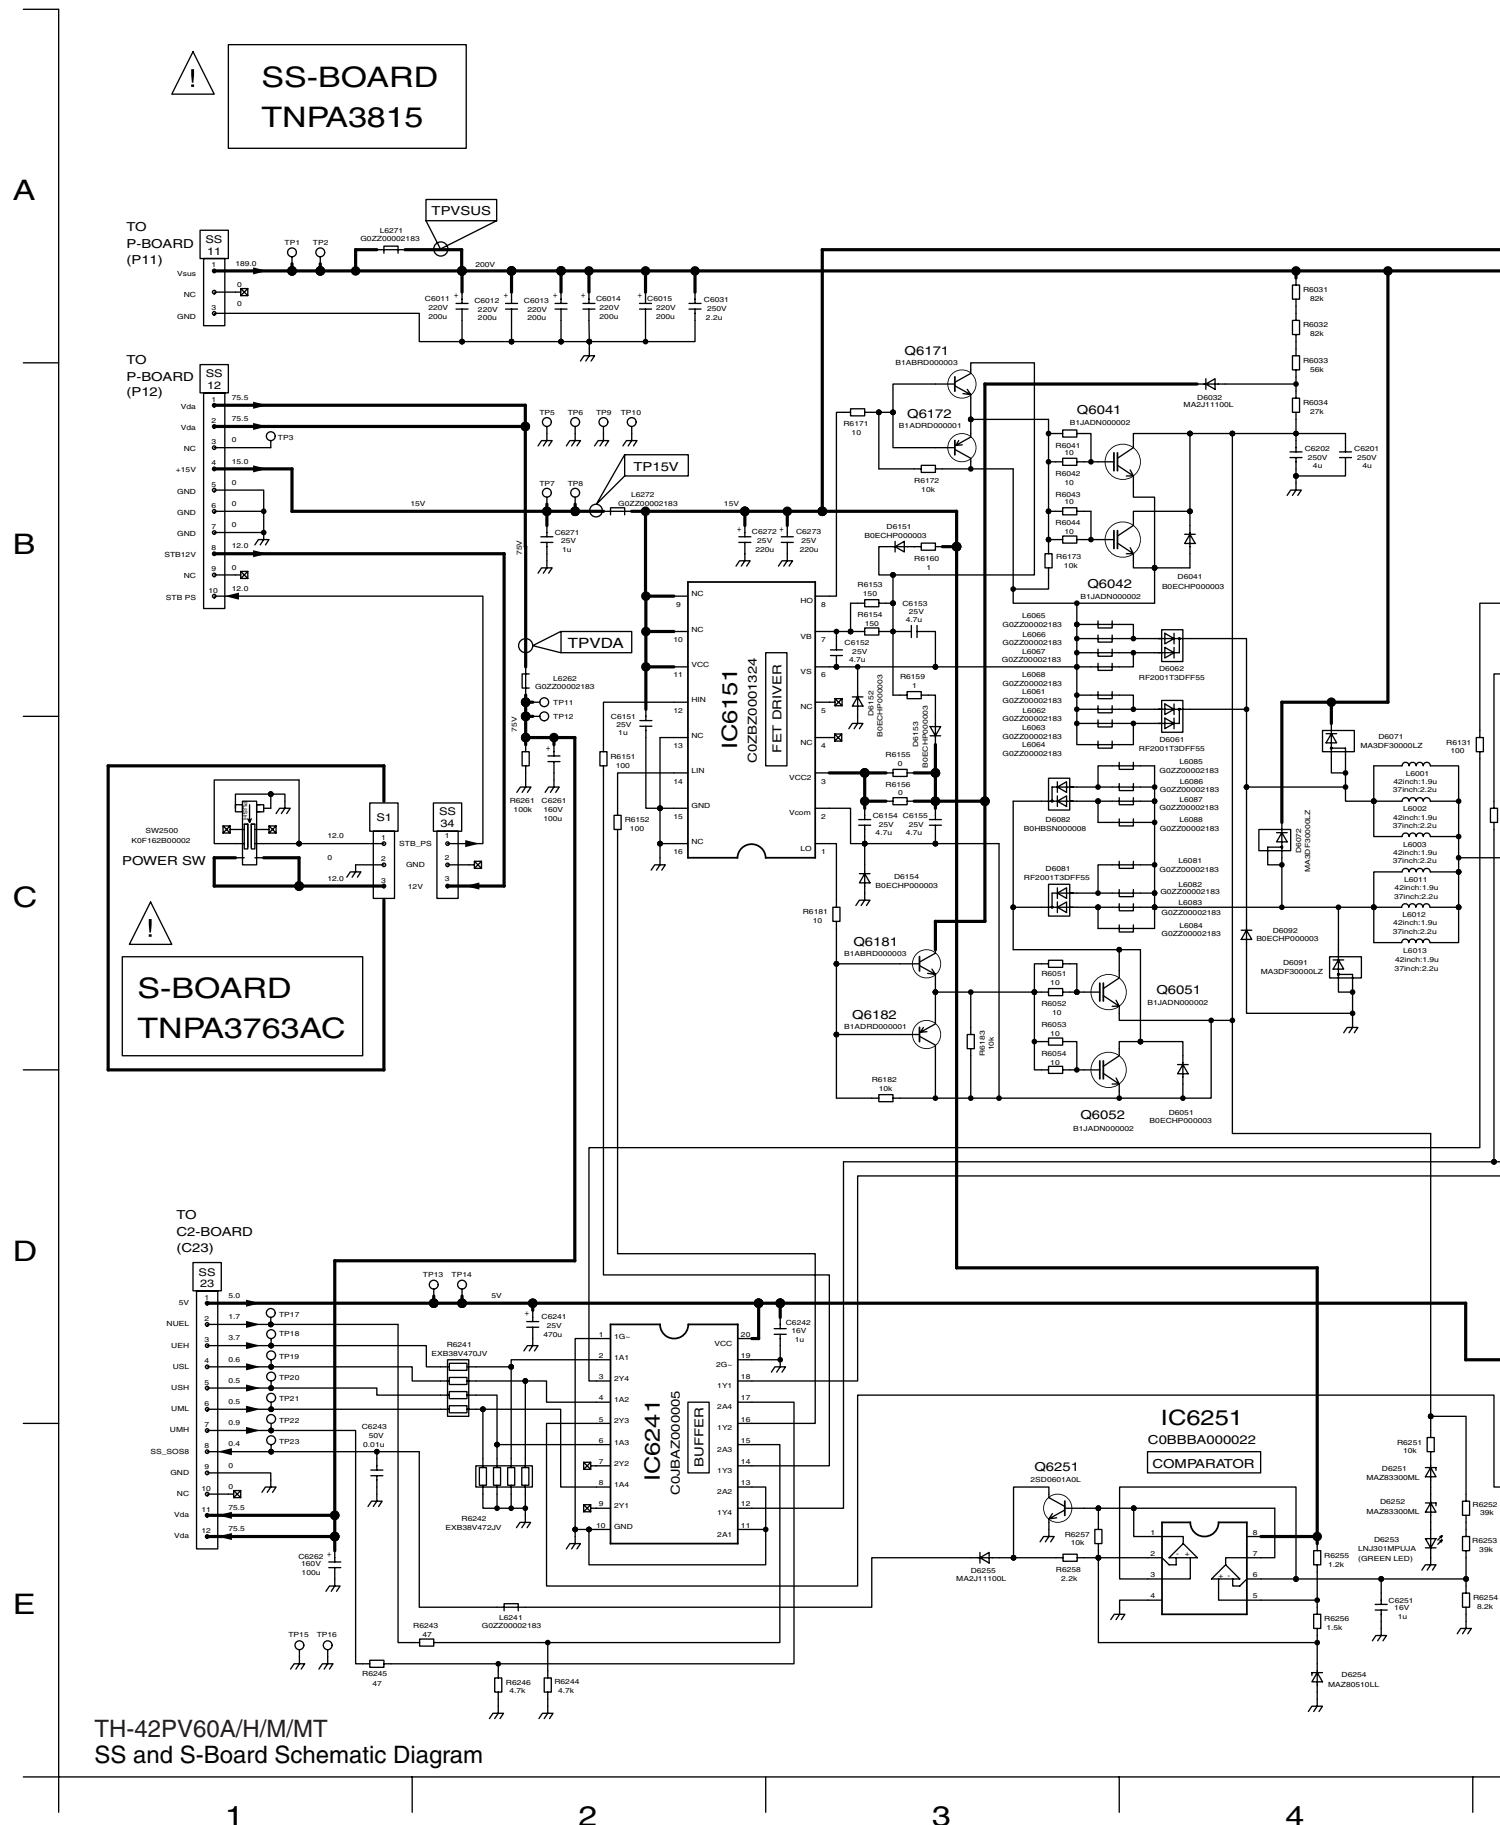

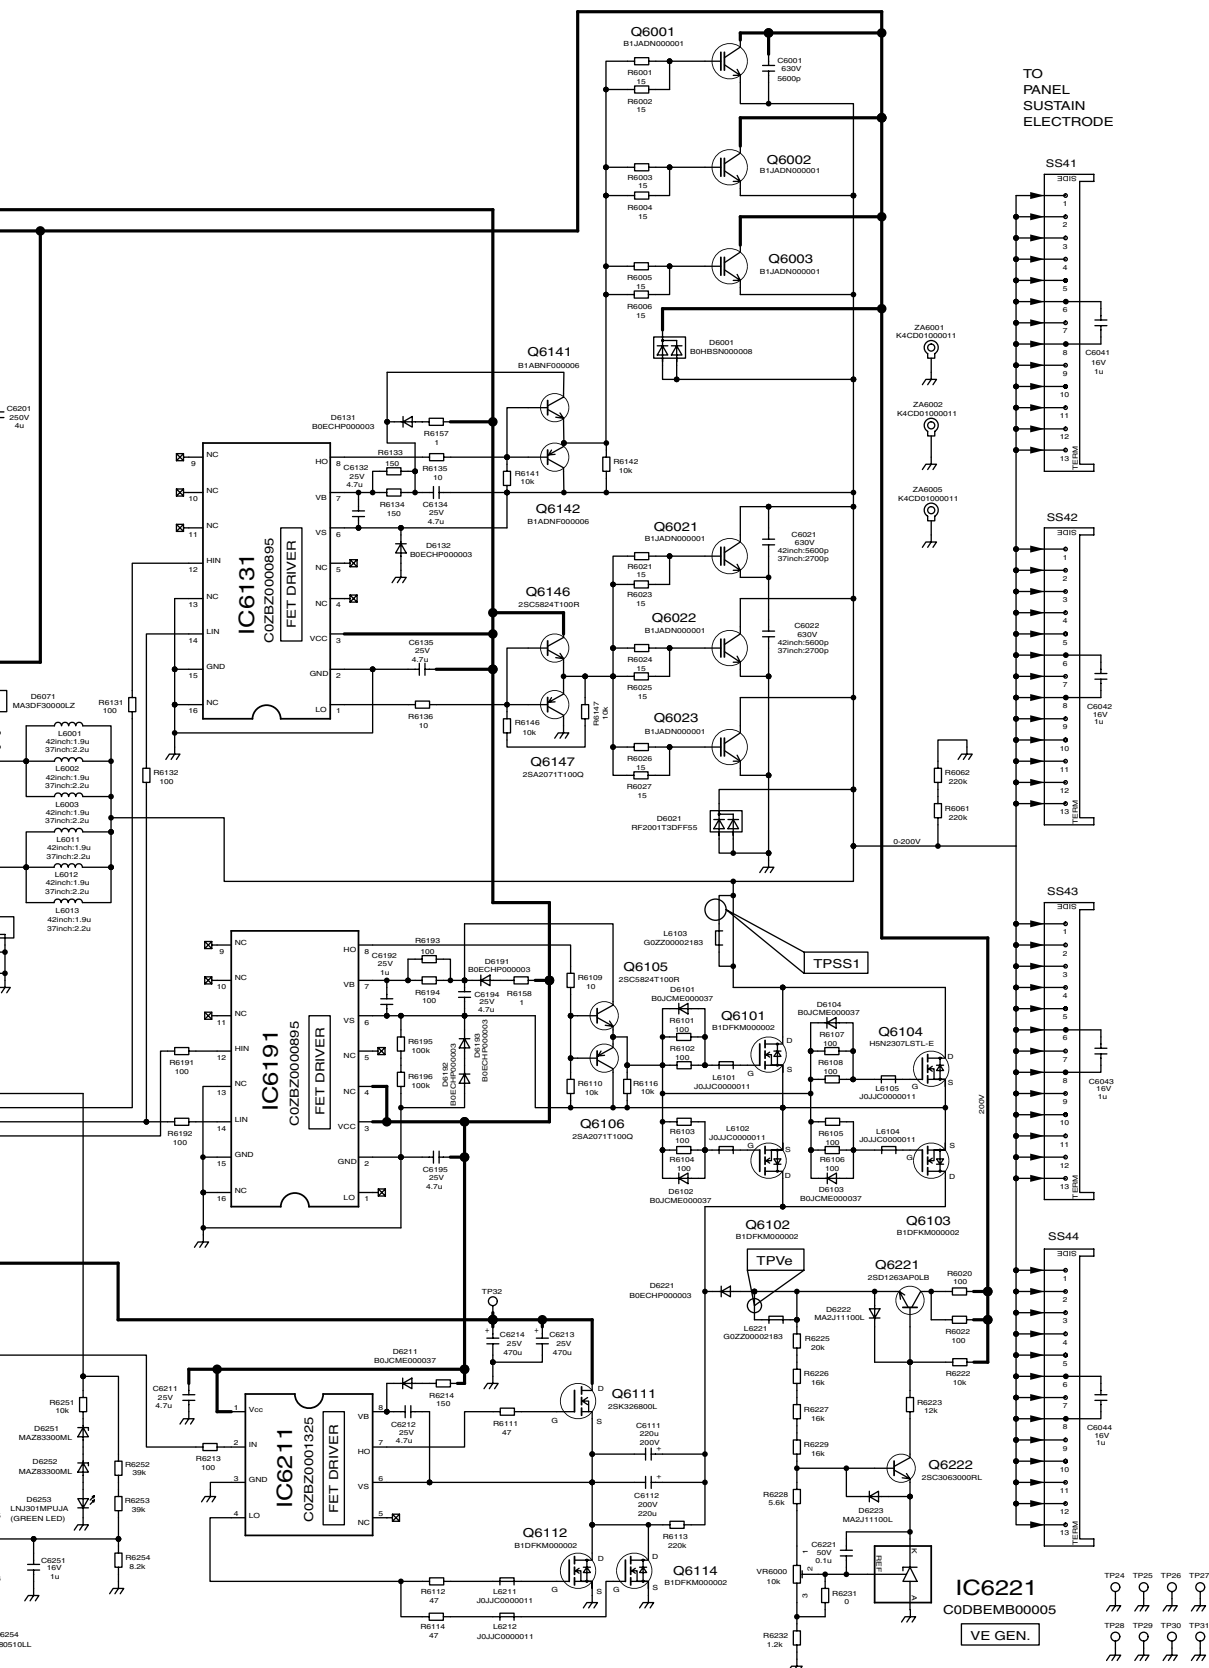



TH-42PV60A/H/M/MT
SS and S-Board Schematic Diagram

5


6


7


8

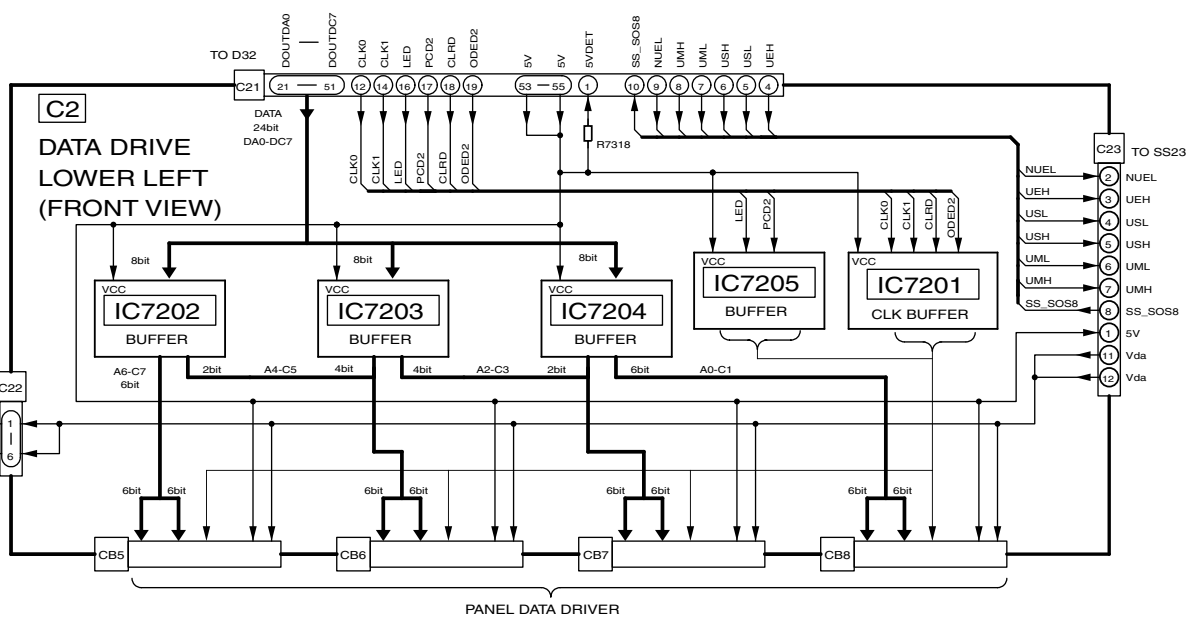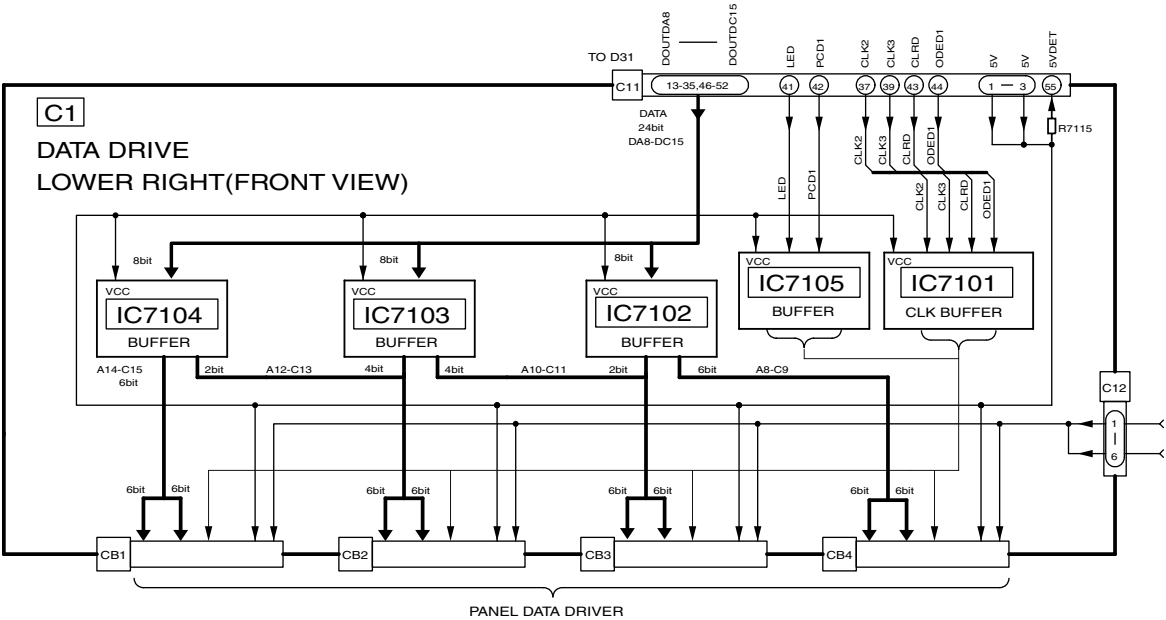


D DIGITAL SIGNAL PROCESSOR
 FORMAT CONVERTER
 PLASMA AI
 SUB-FIELD PROCESSOR

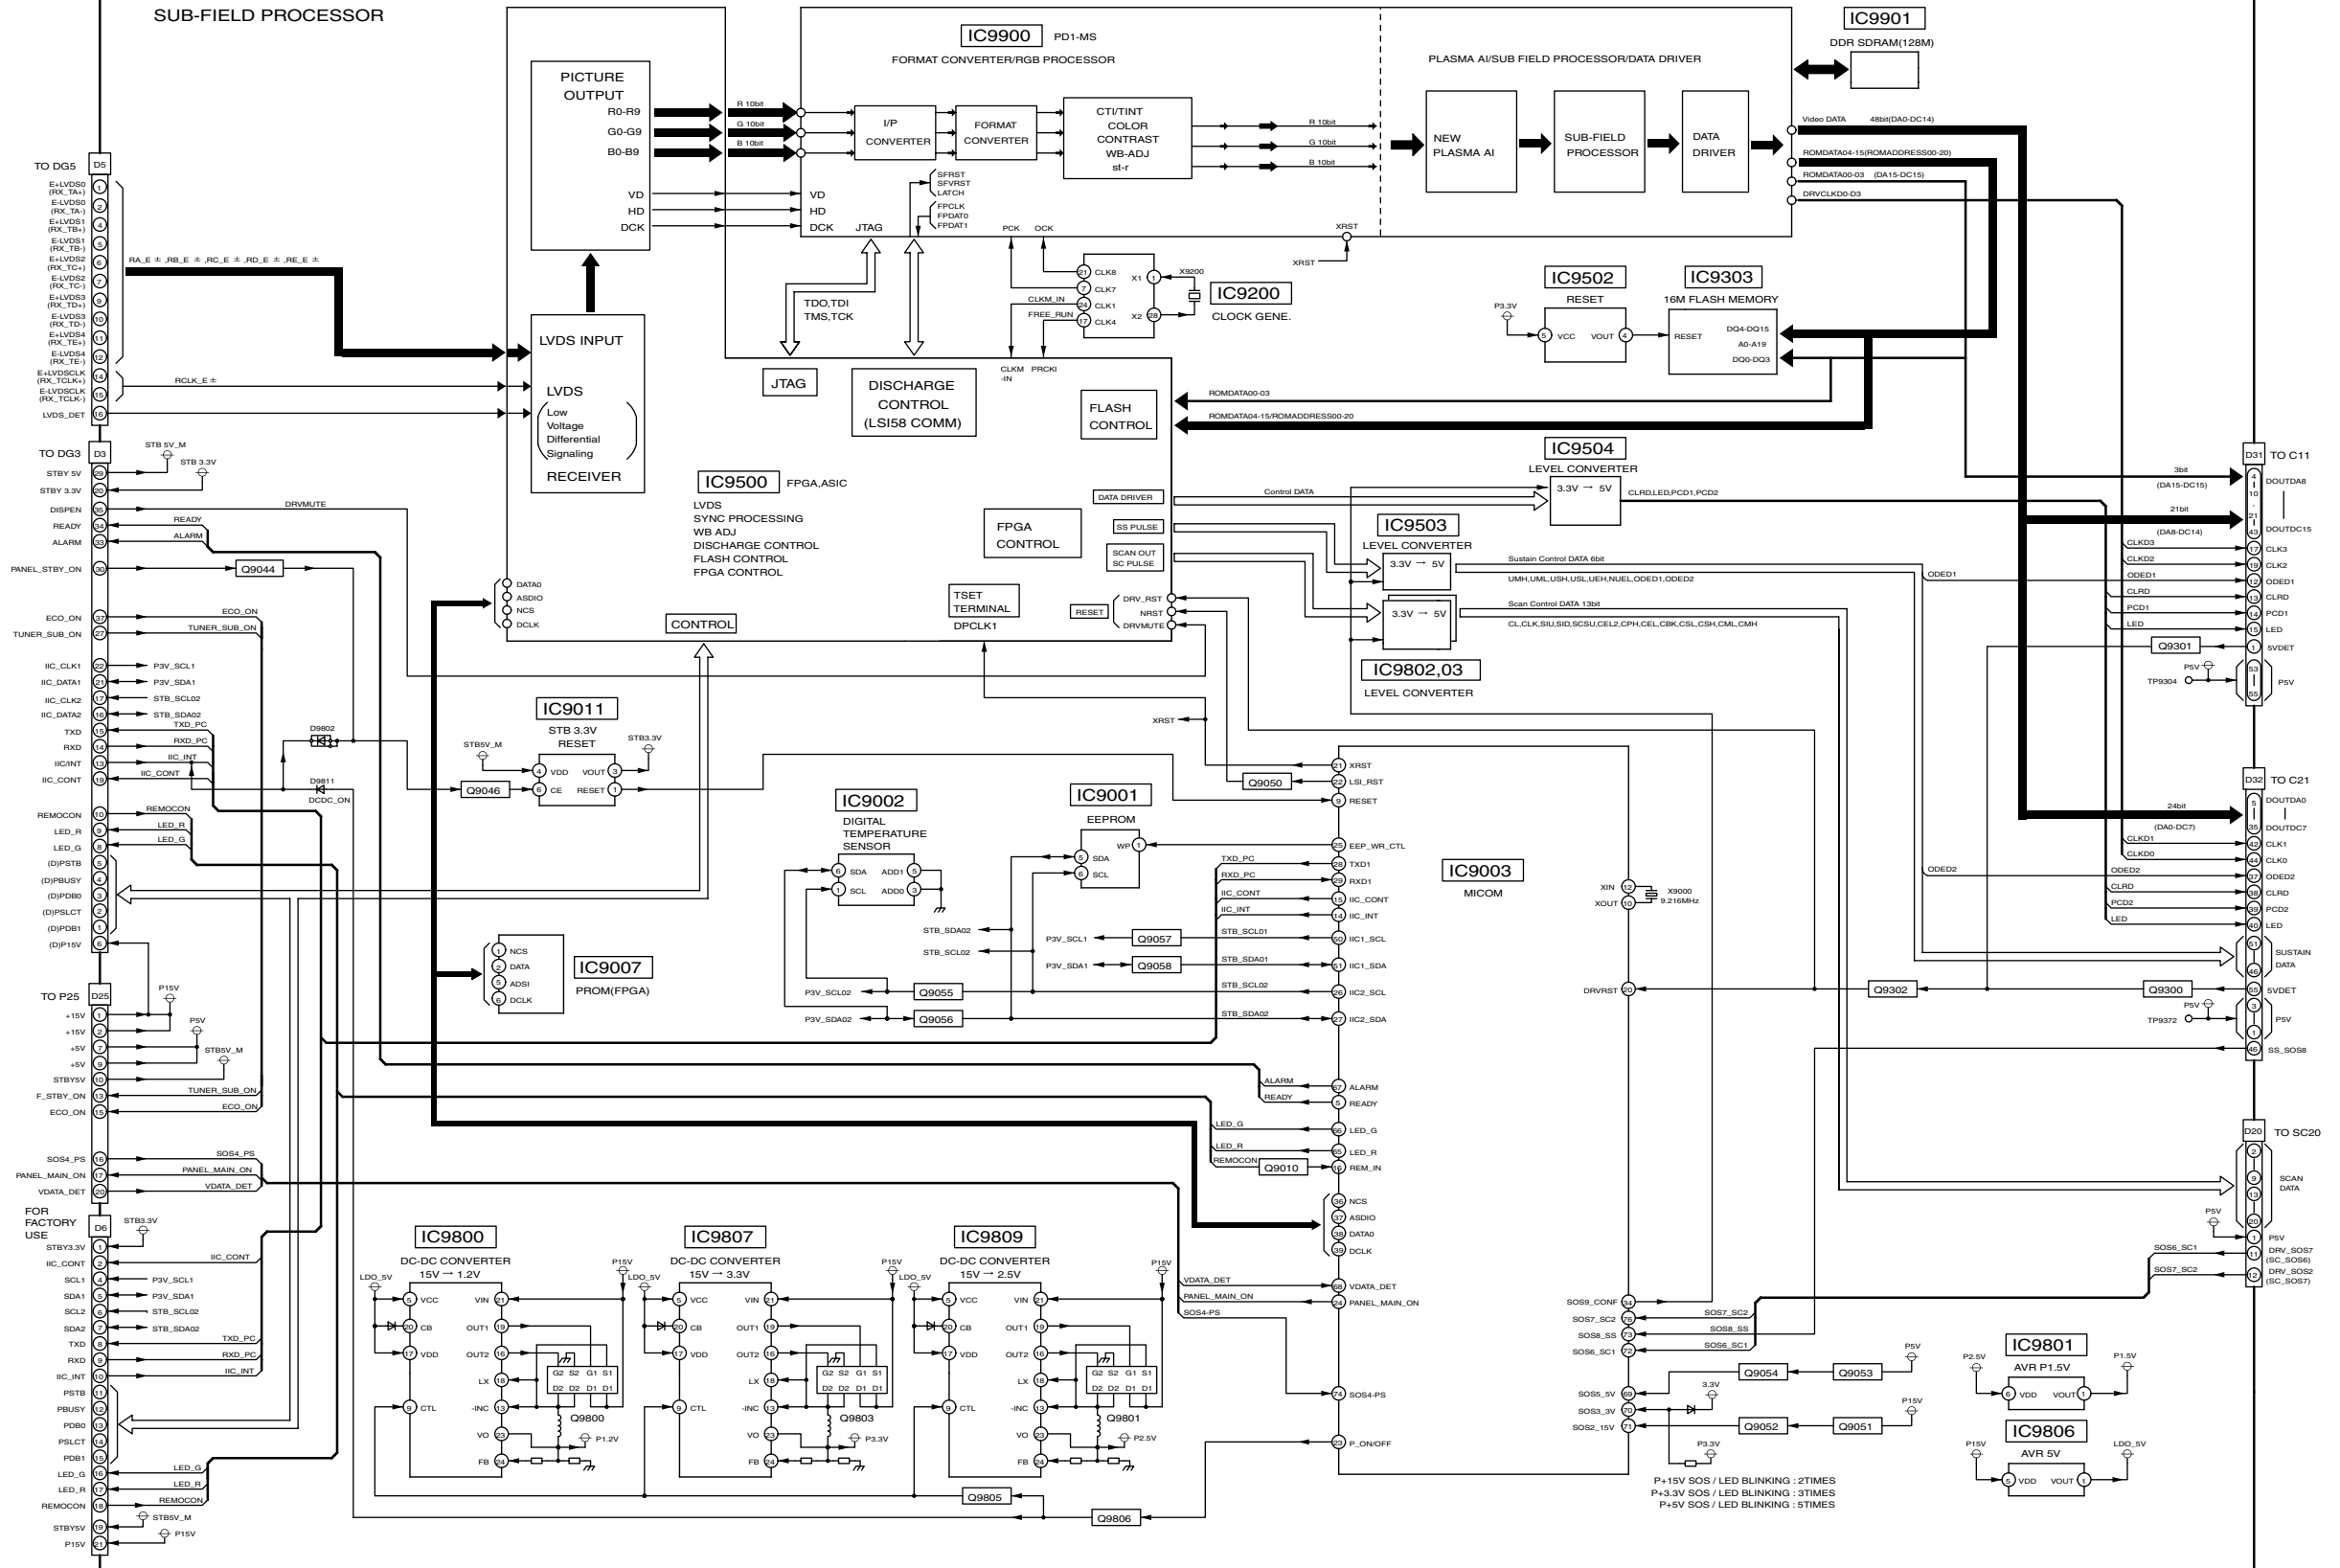

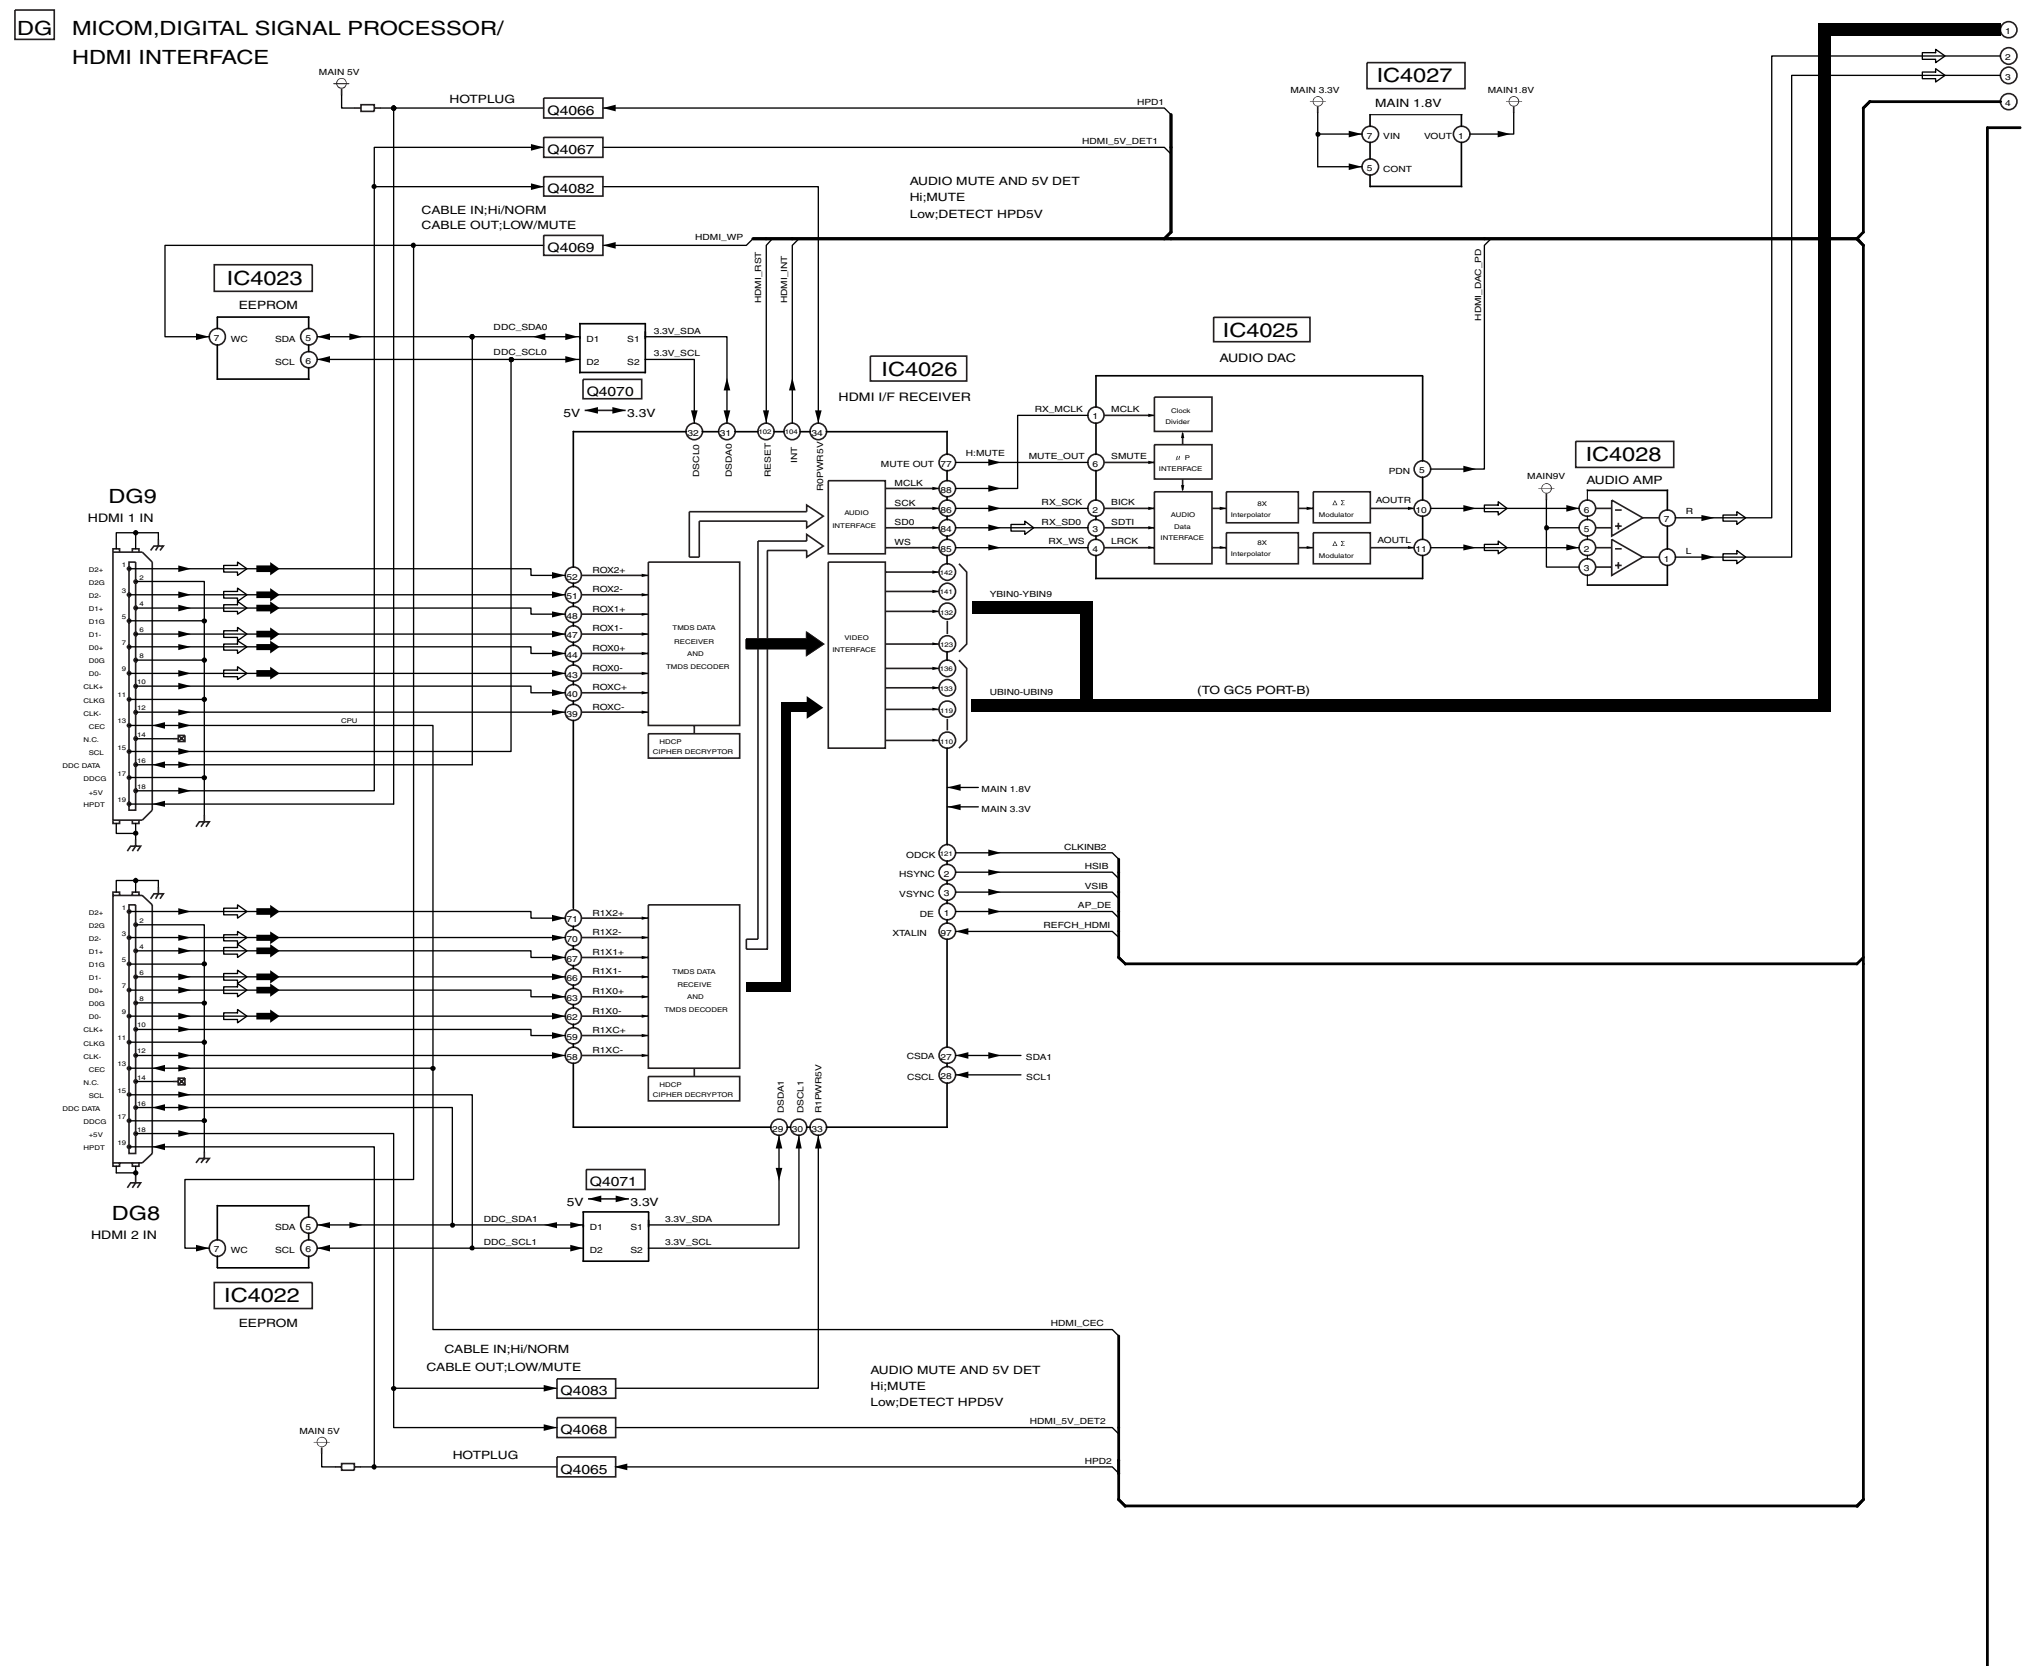




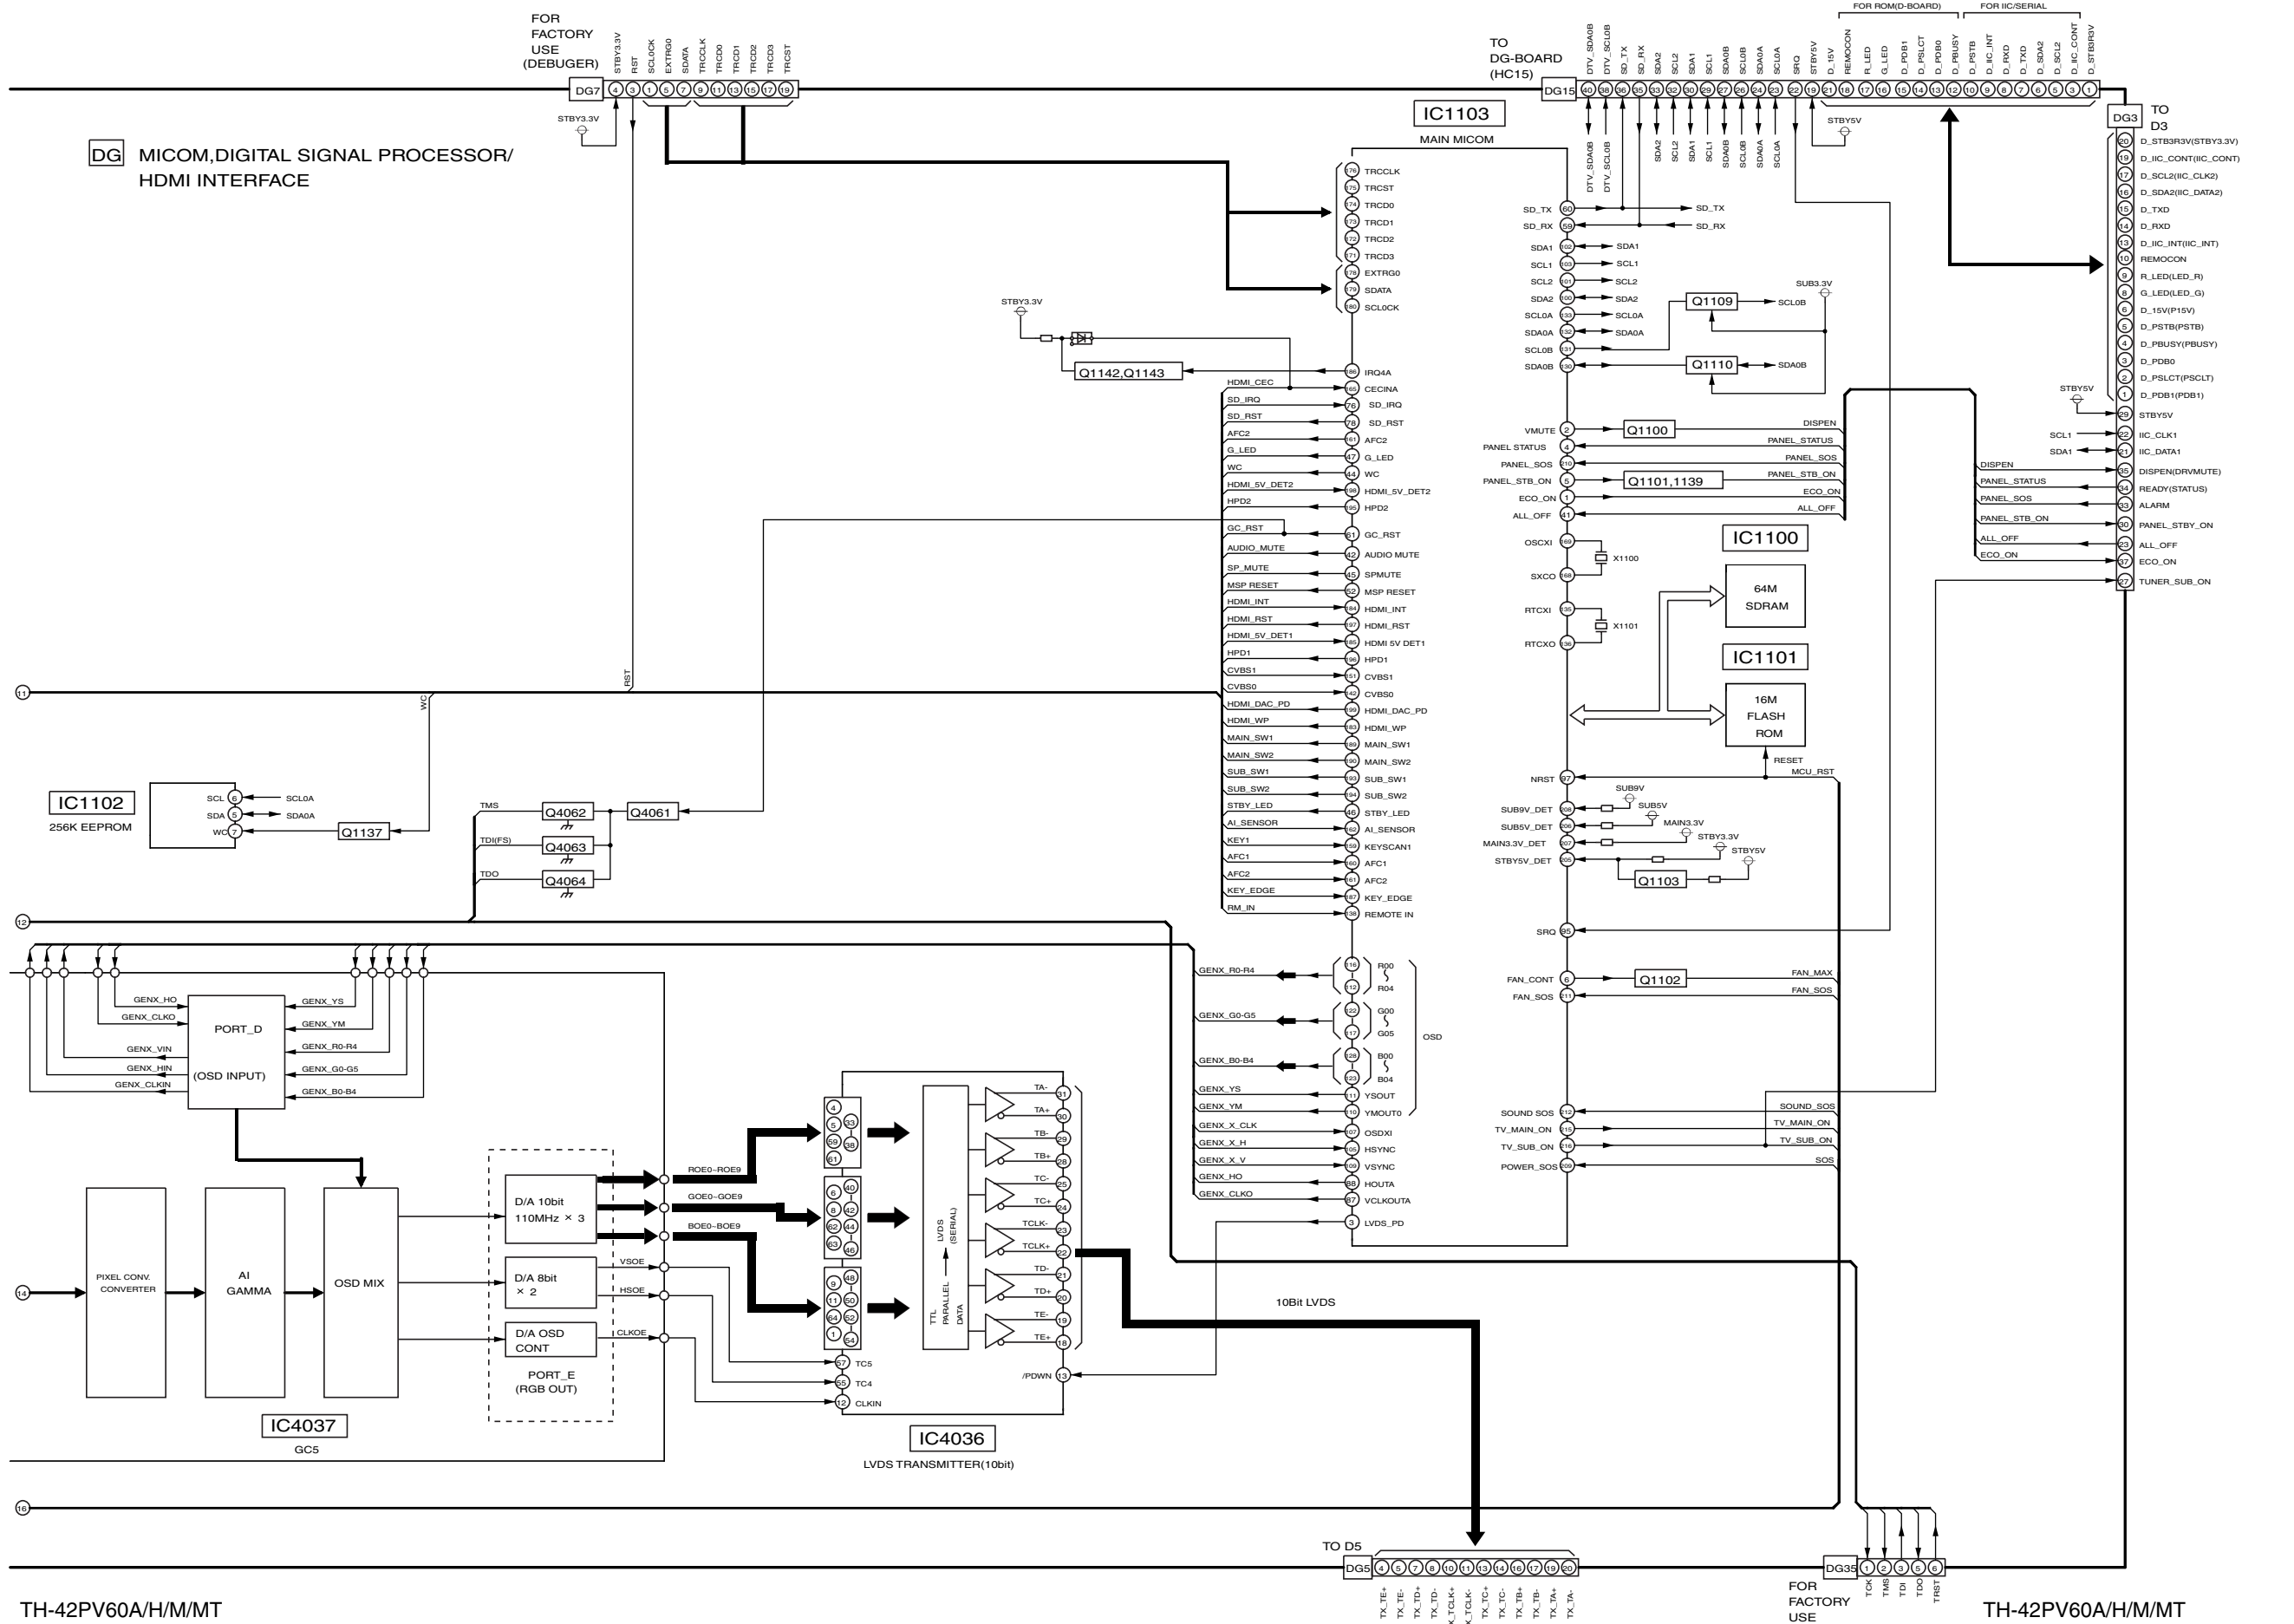


TH-42PV60A/H/M/MT
DG-Board (3 of 3) Block Diagram


TH-42PV60A/H/M/MT
DG-Board (3 of 3) Block Diagram

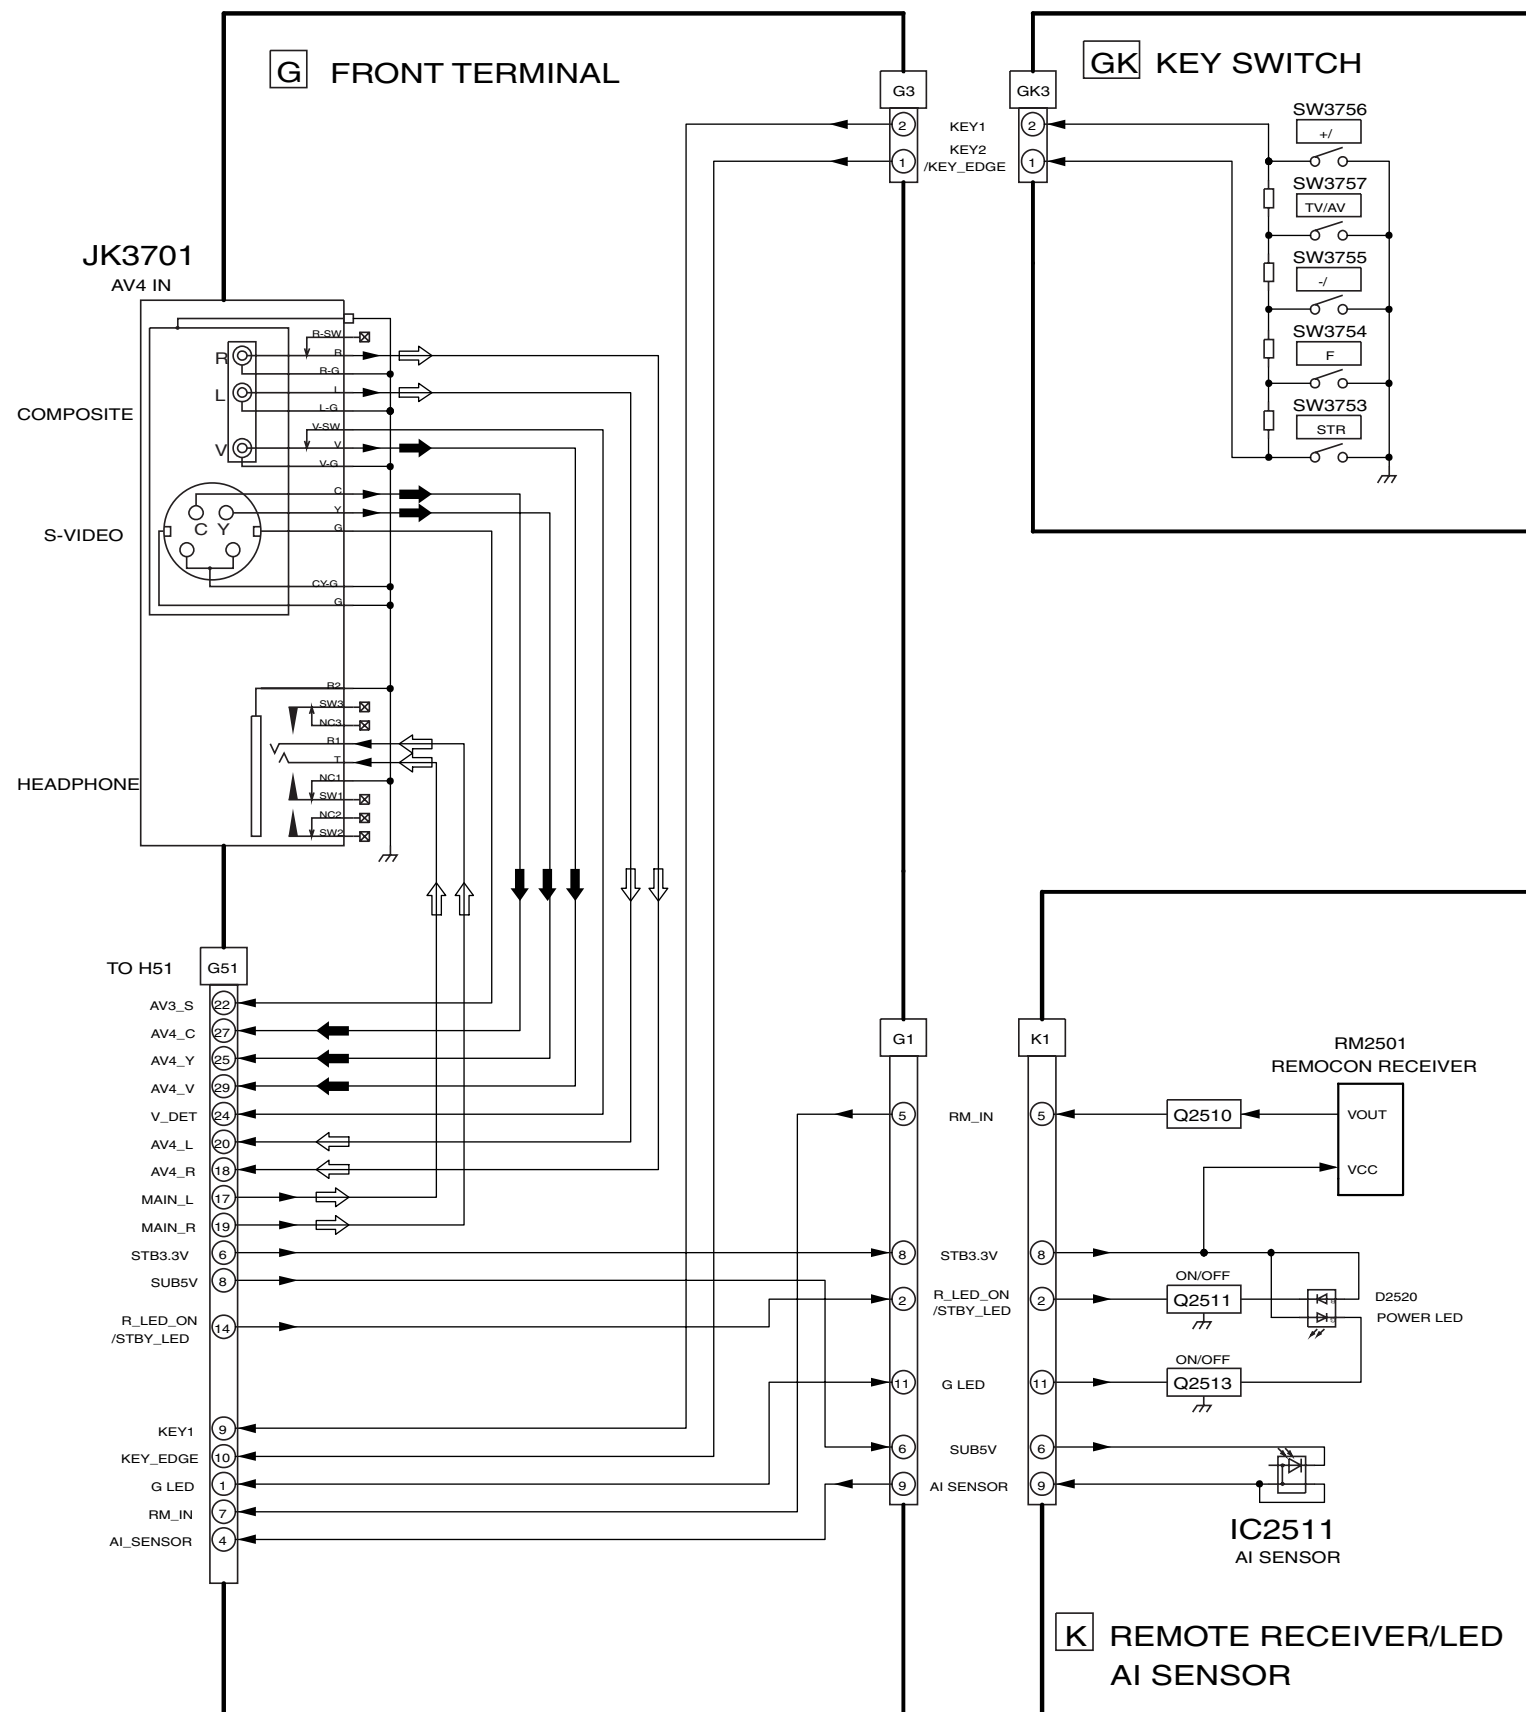

TH-42PV60A/H/M/MT
G, GK, K, nad HC-Board Block Diagram

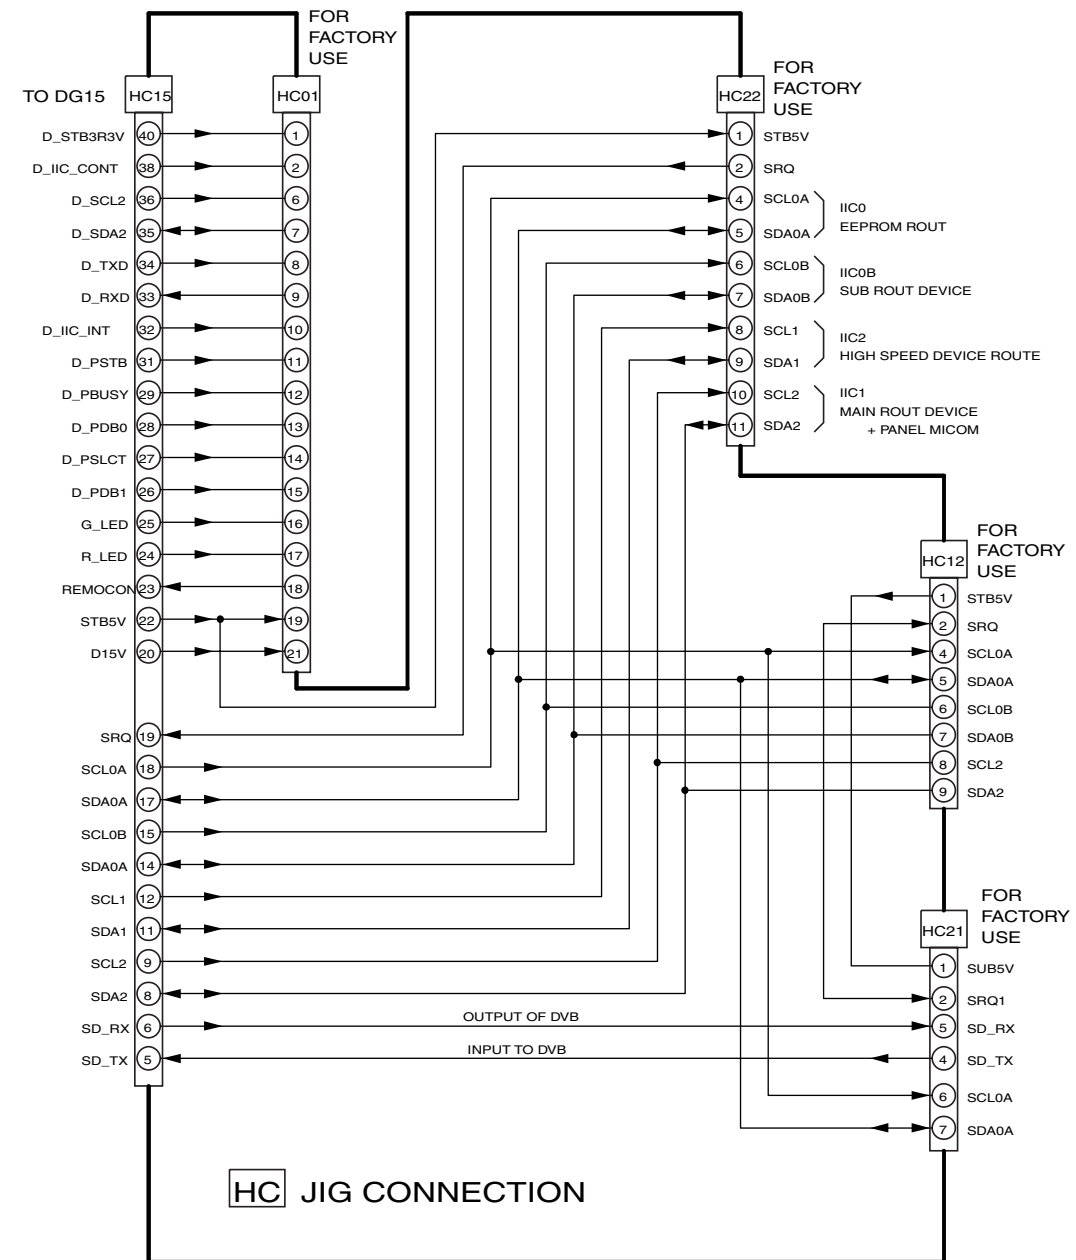


TH-42PV60A/H/M/MT
G, GK, K, and HC-Board Block Diagram

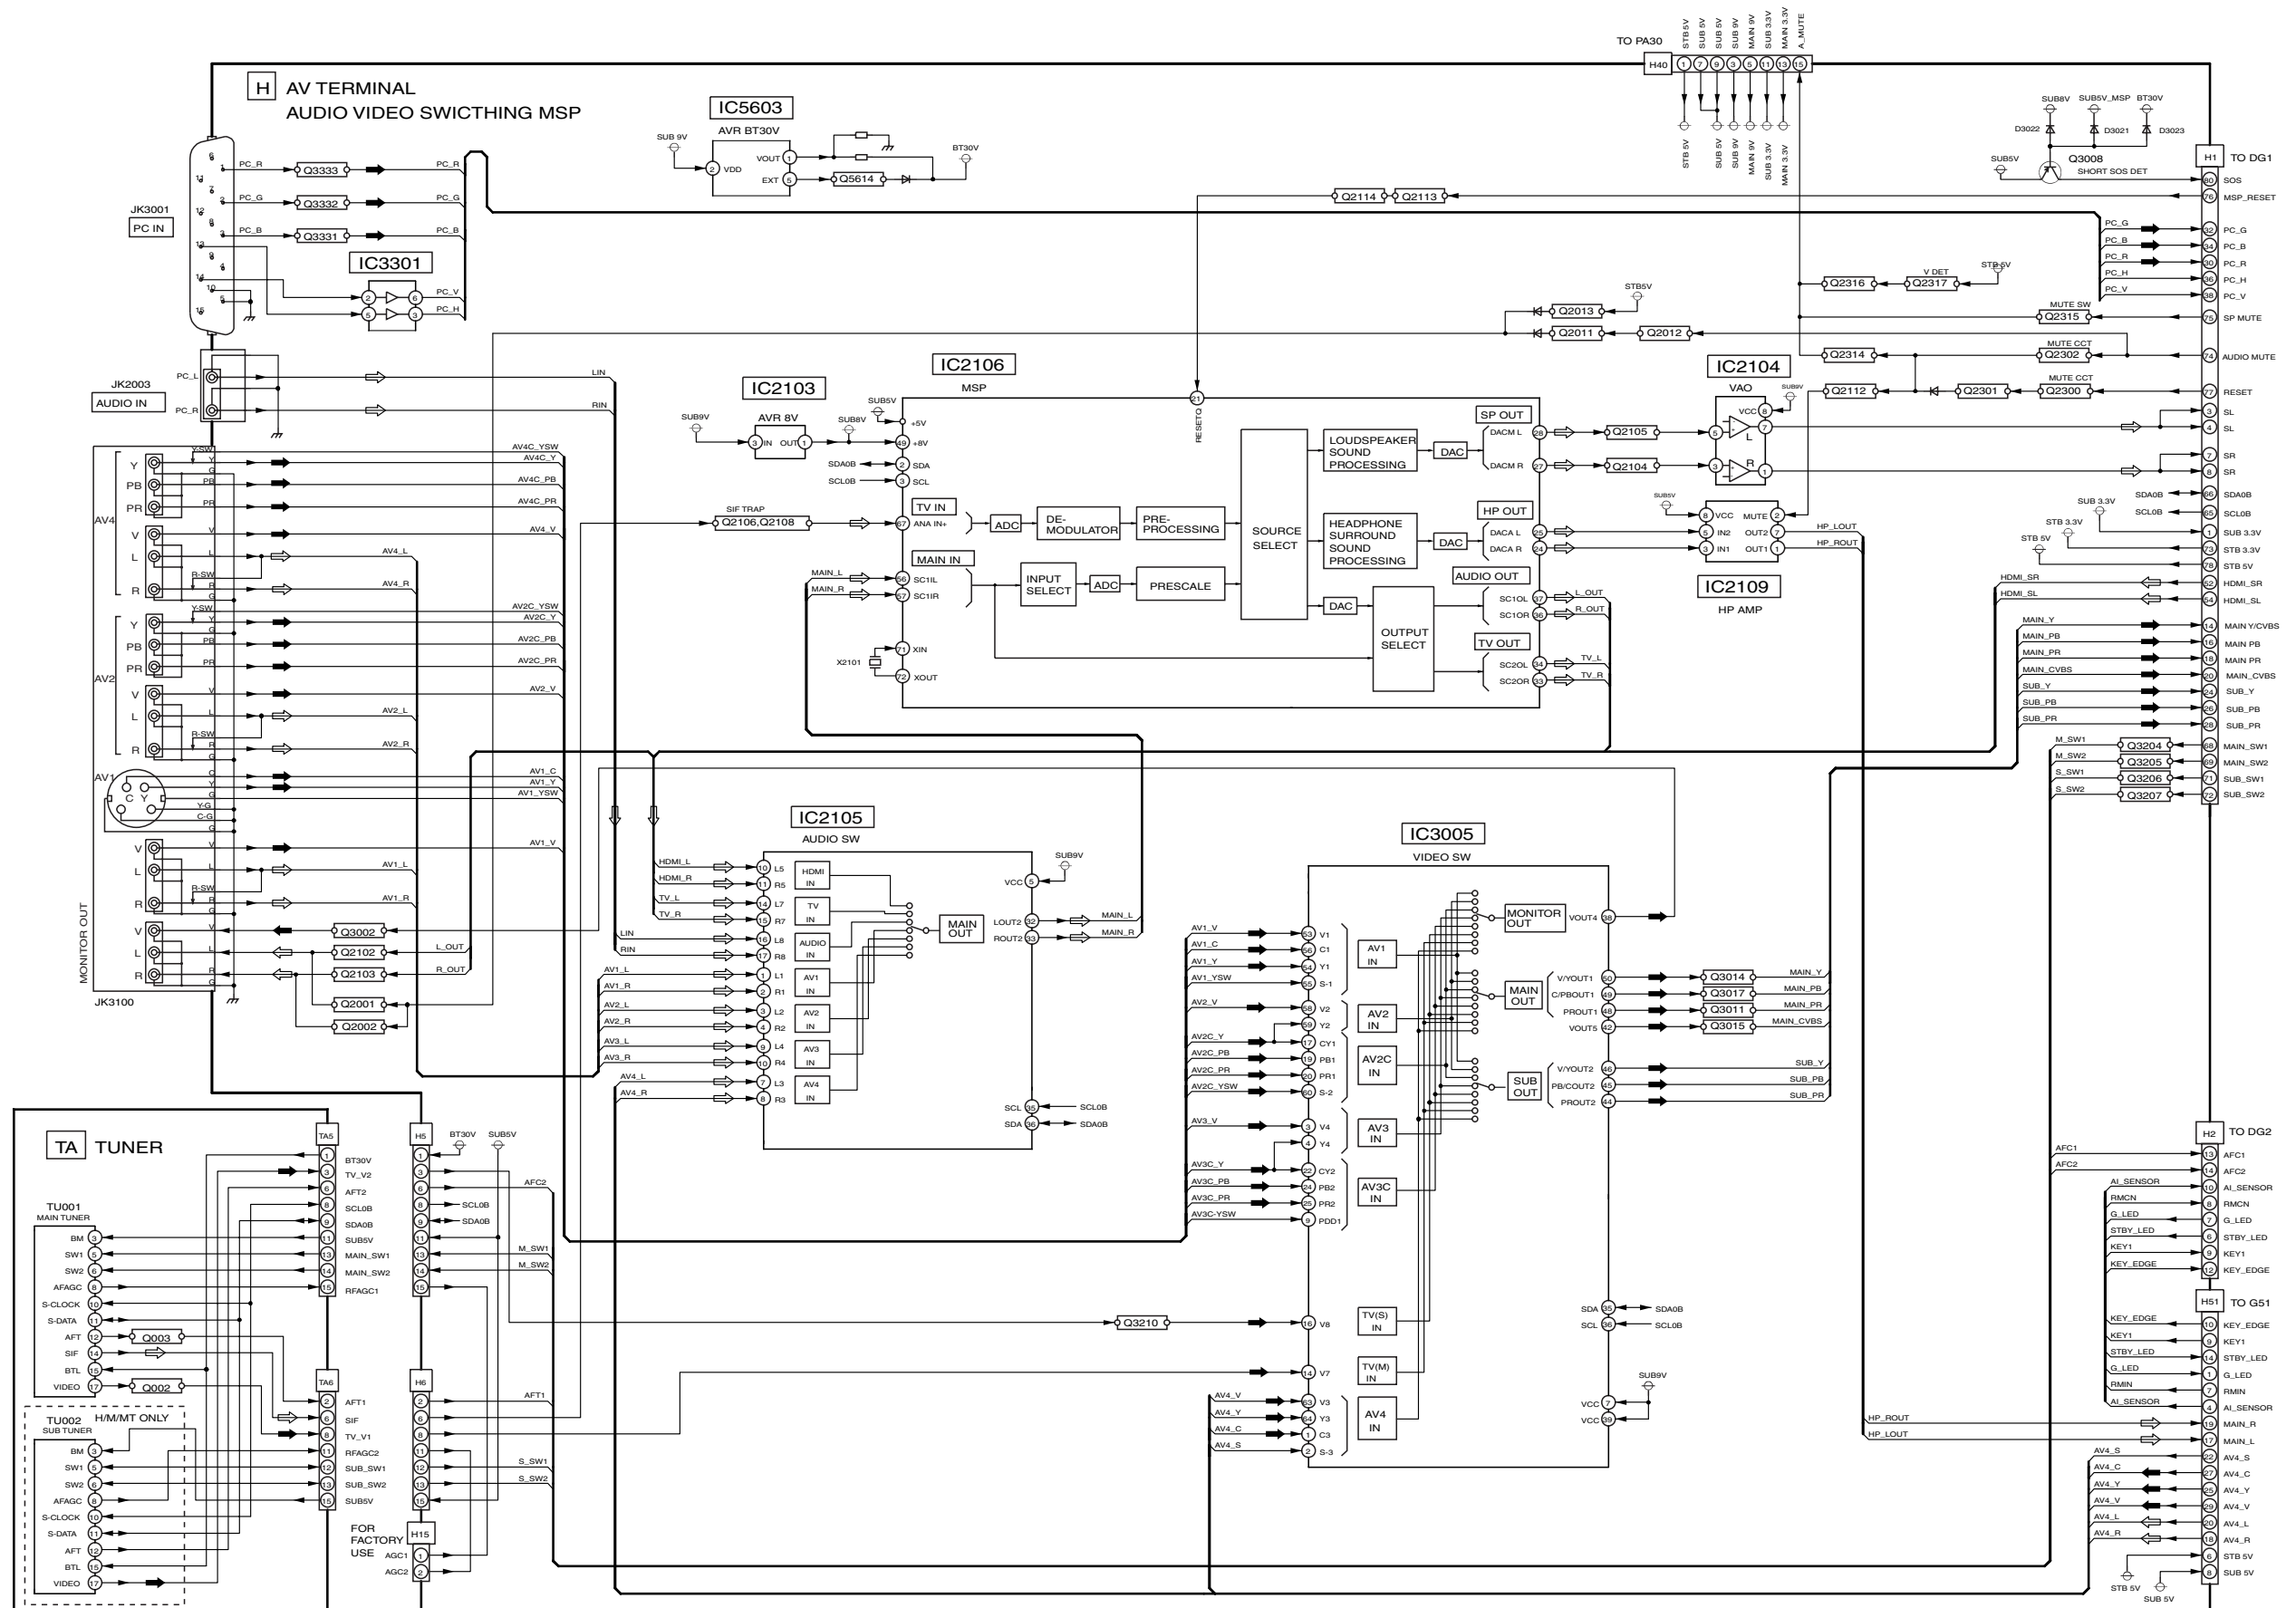

TH-42PV60A/H/M/MT H and TA-Board Block Diagram


TH-42PV60A/H/M/MT H and TA-Board Block Diagram

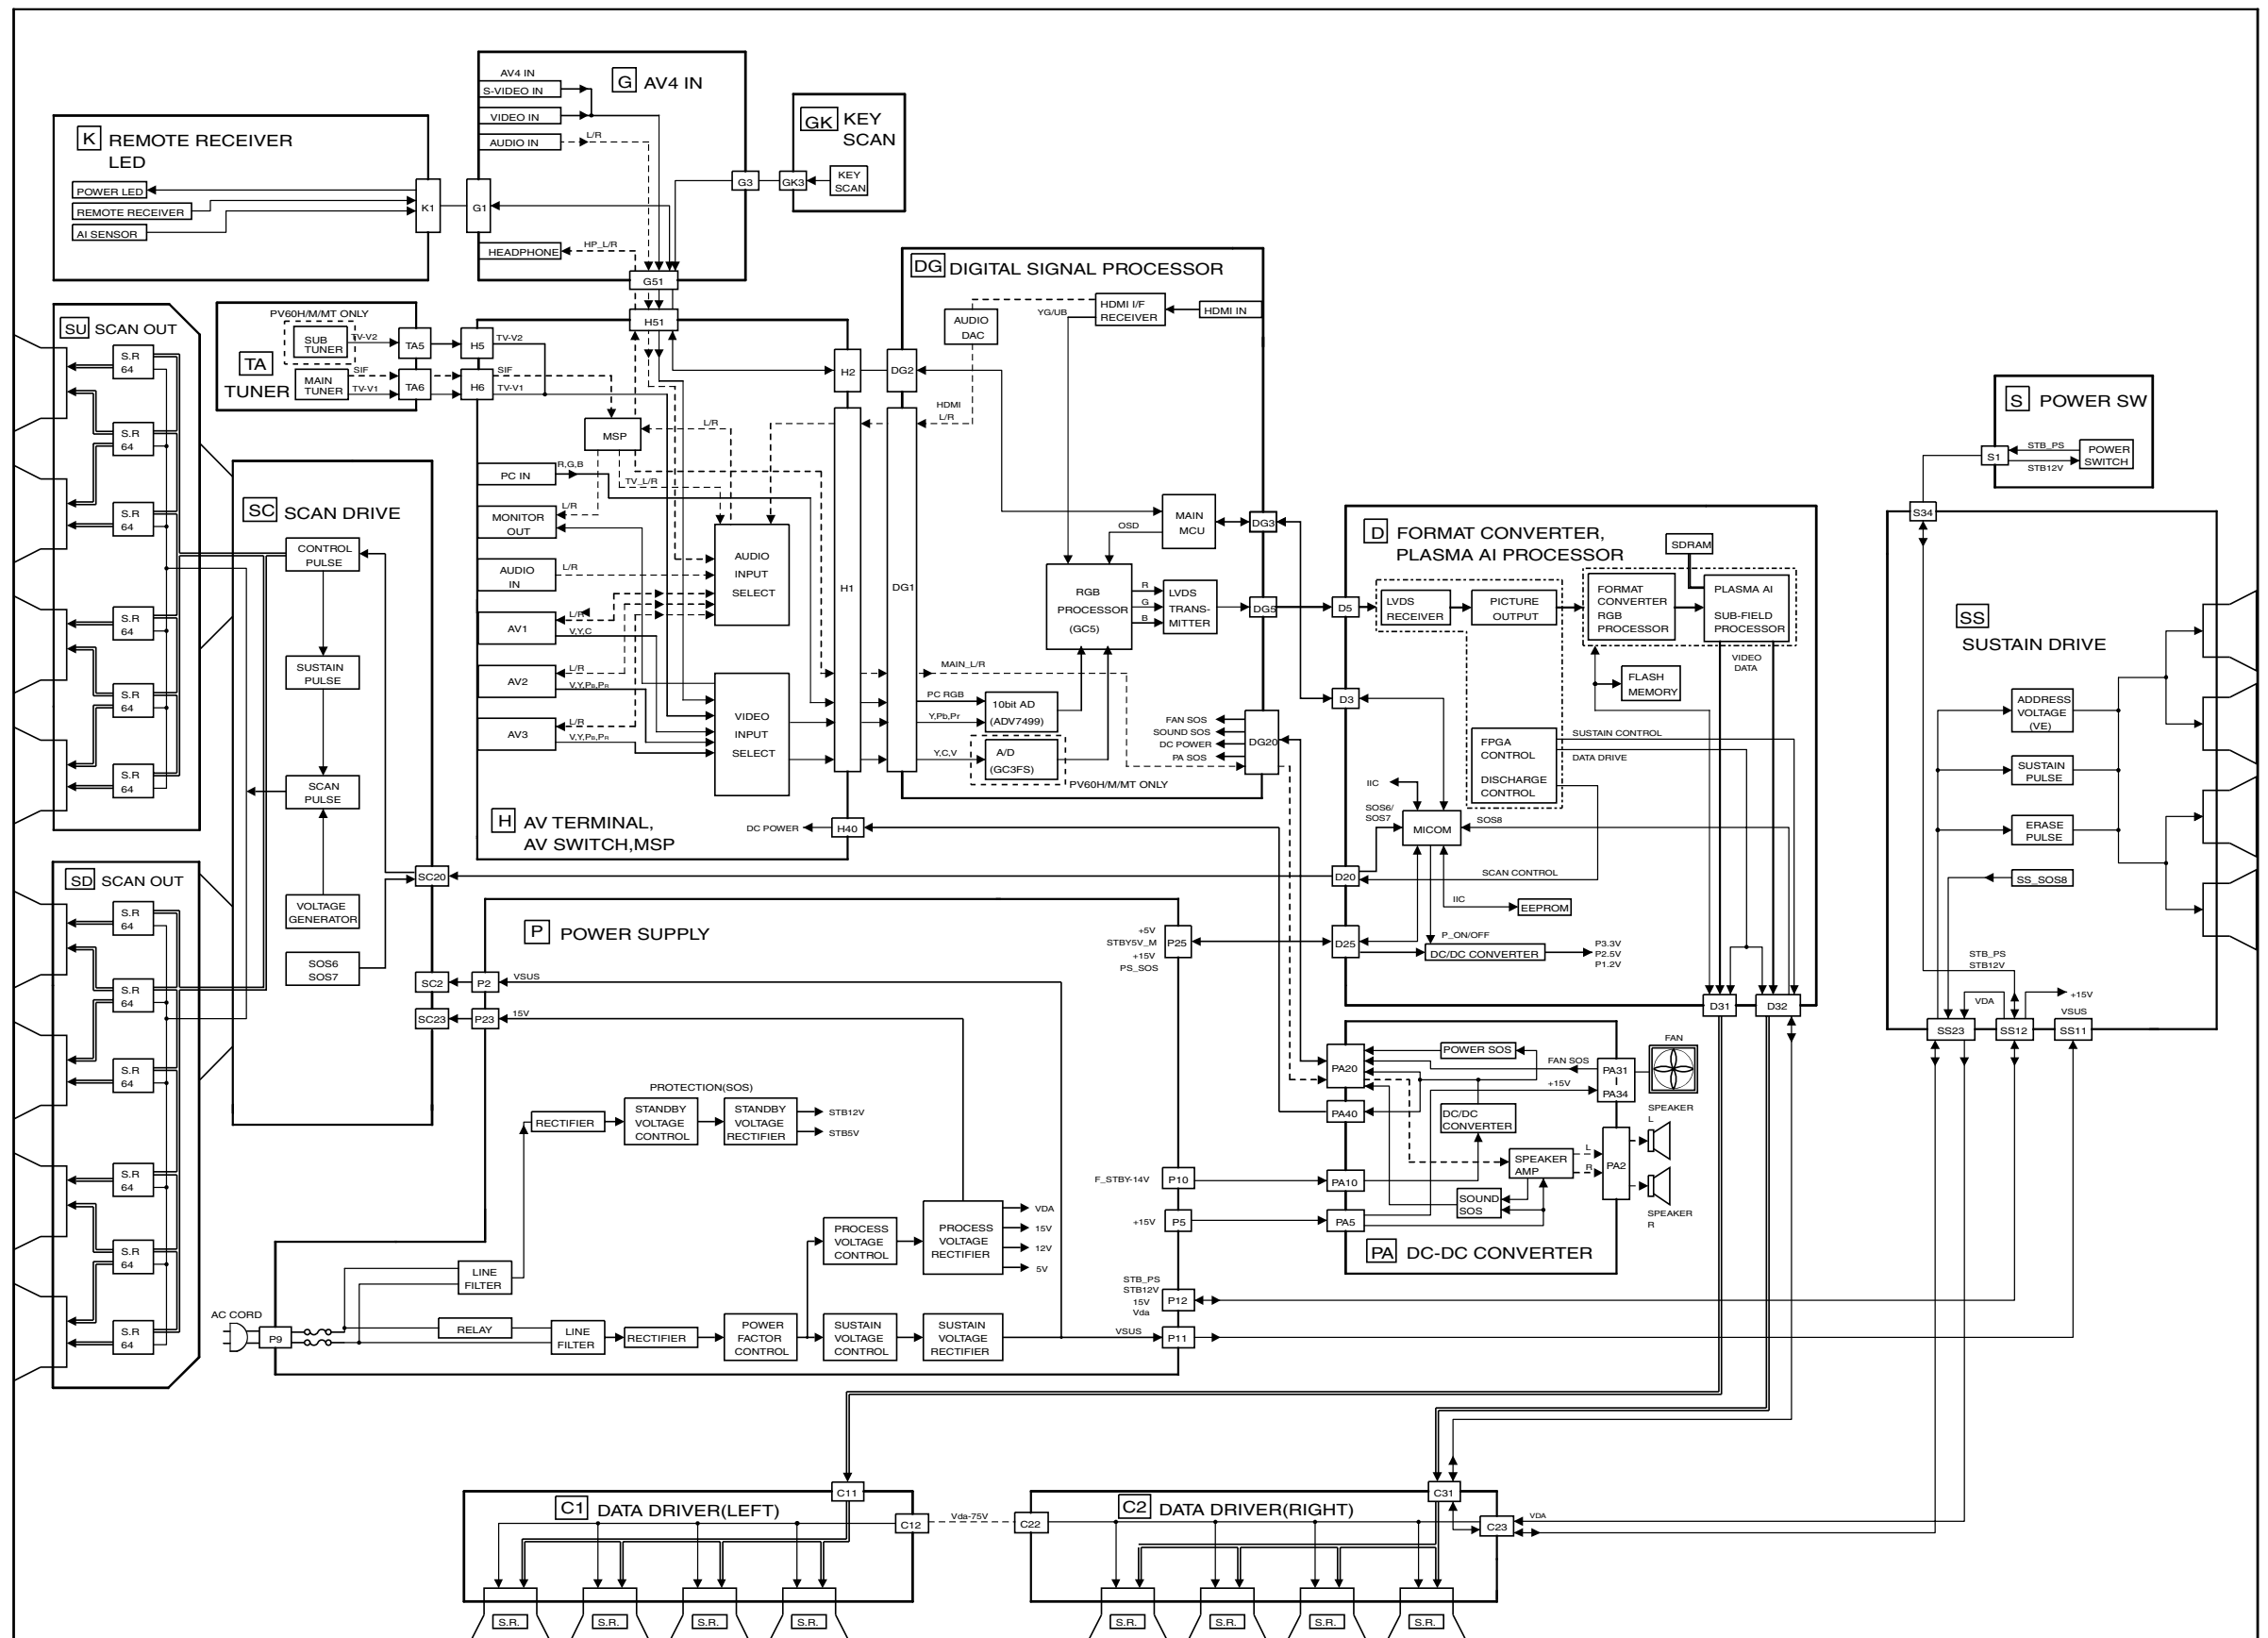


TH-42PV60A/H/M/MT Main Block Diagram

TH-42PV60A/H/M/MT Main Block Diagram




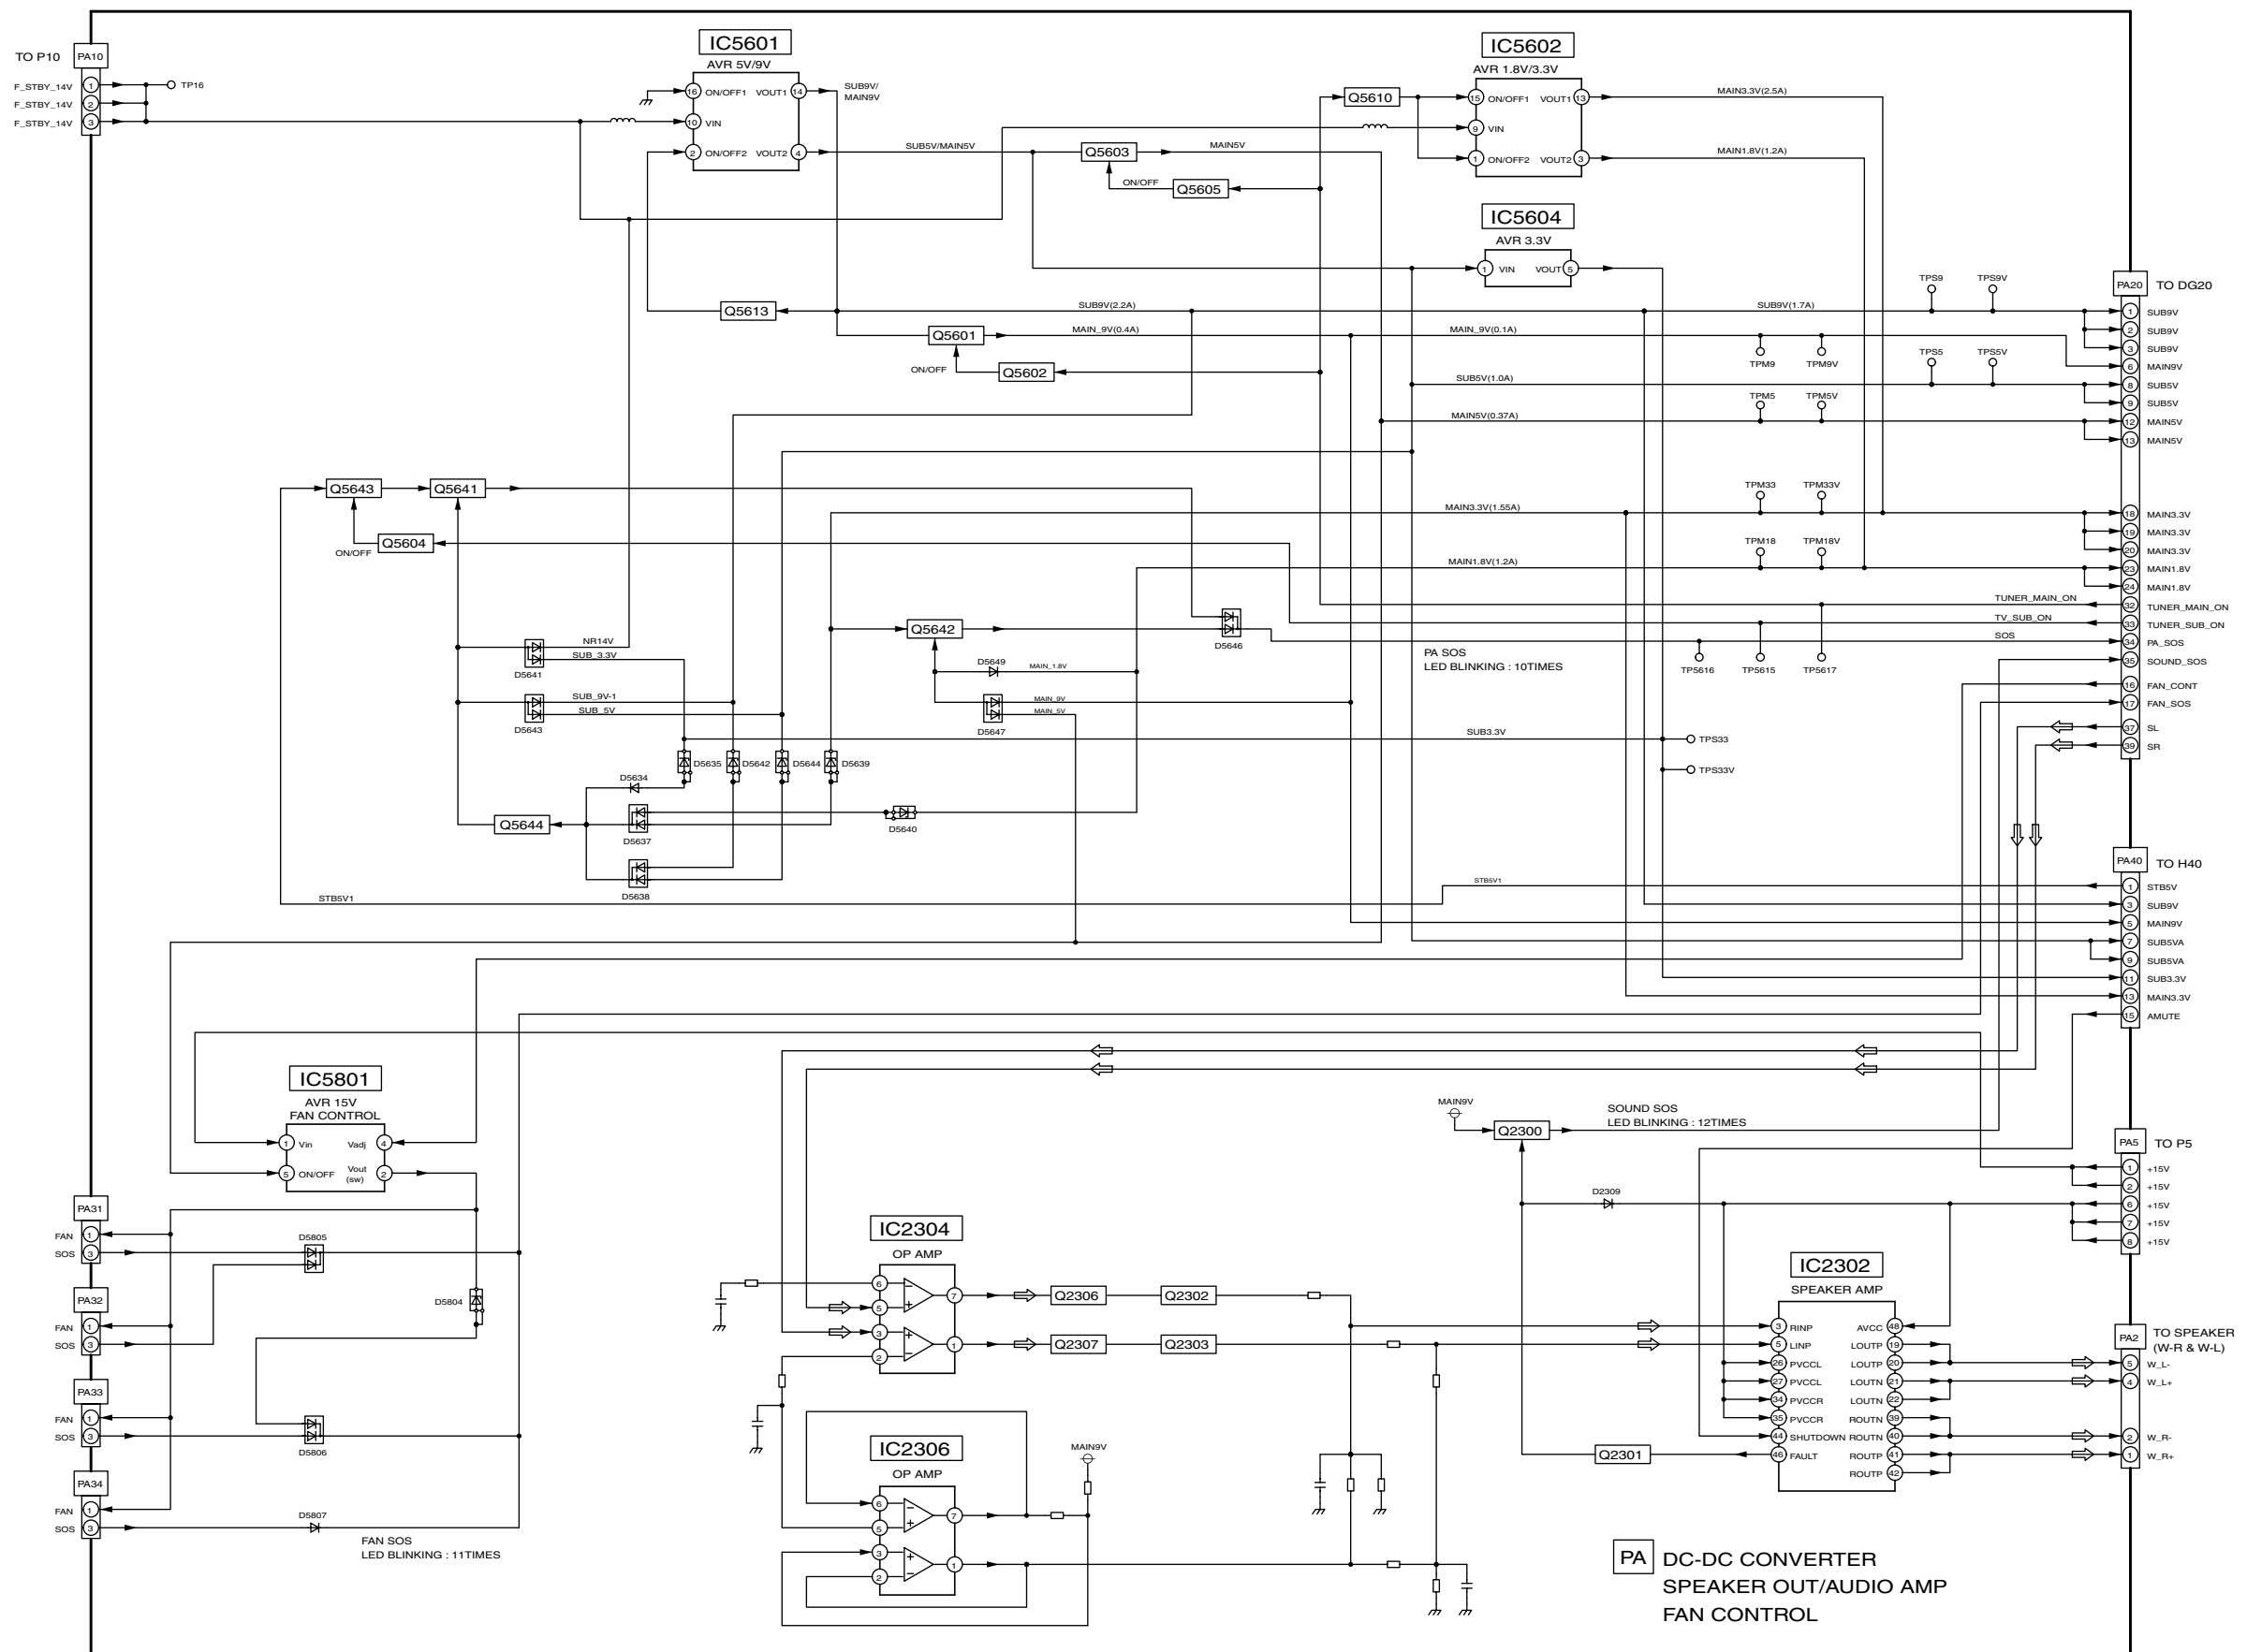

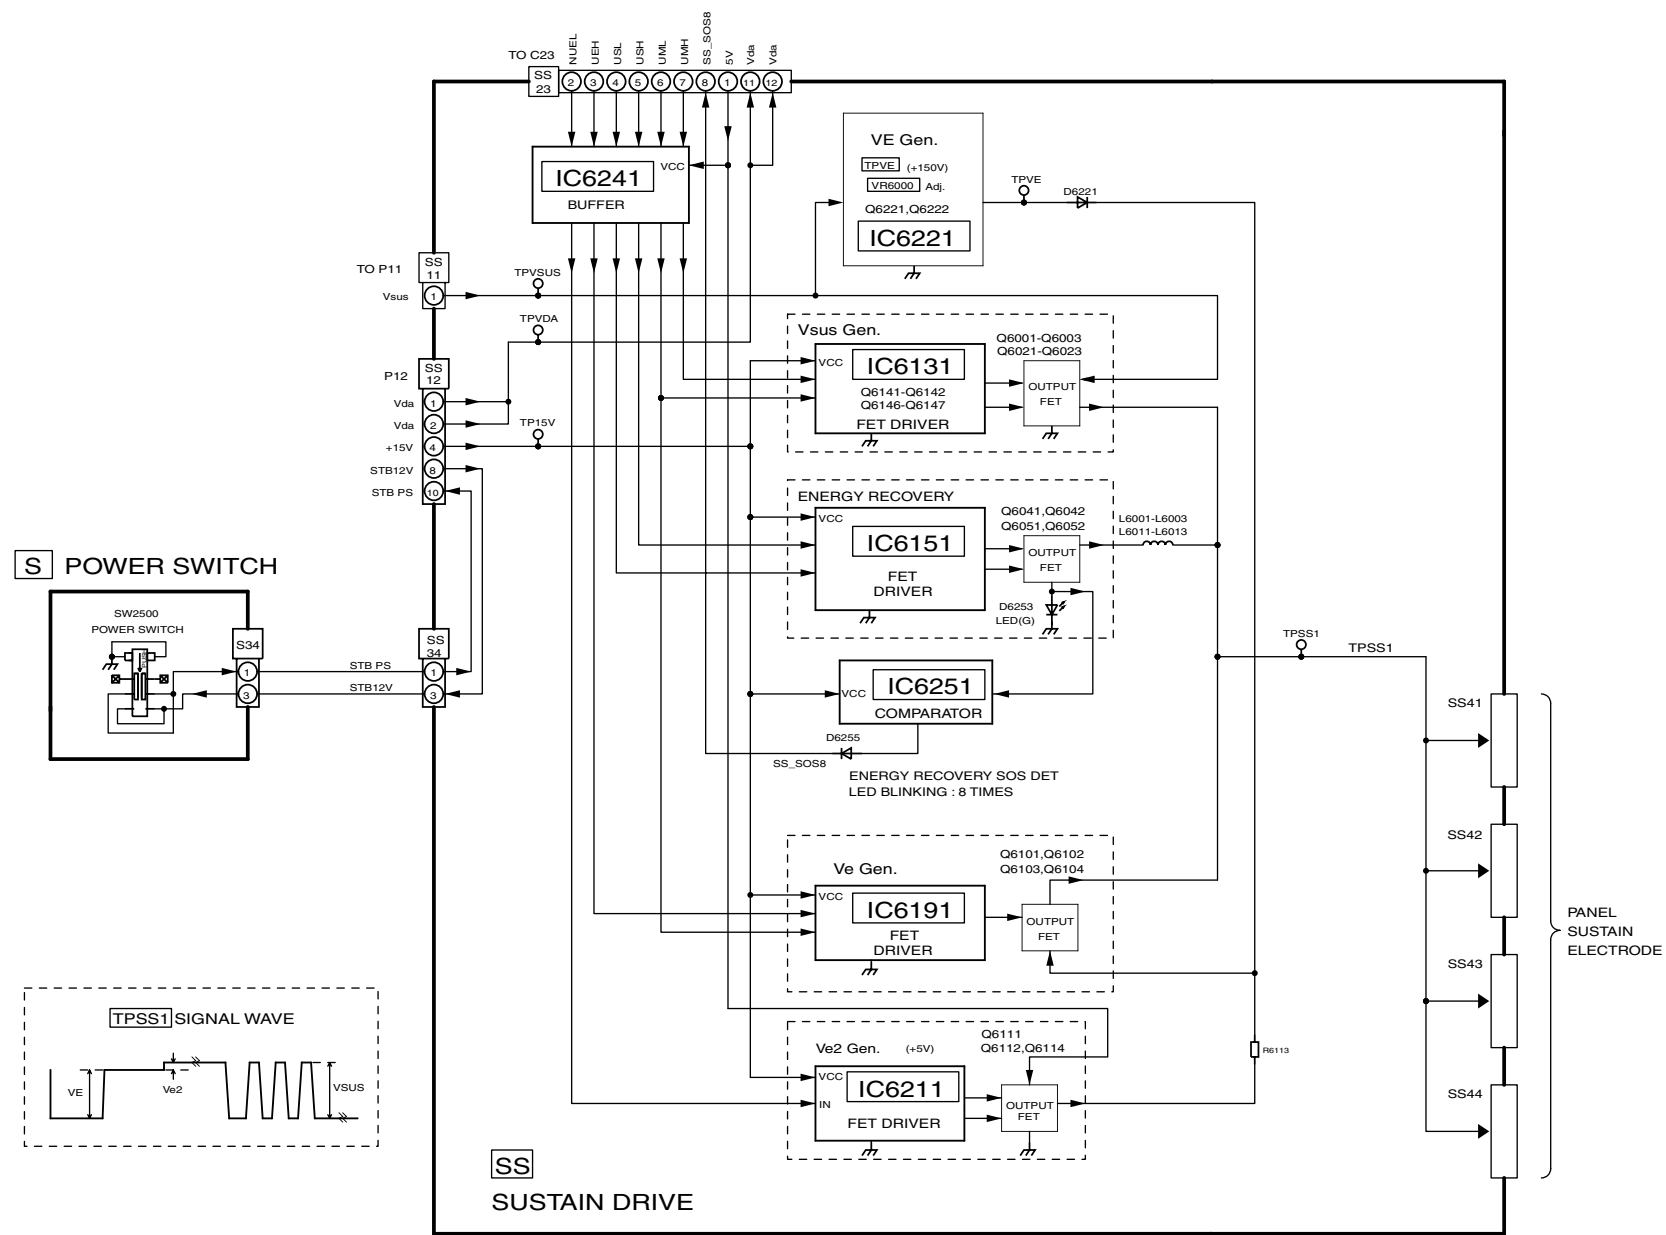


Parts Location


C1-BOARD	
IC	
IC7101	H-2
IC7102	I-2
IC7103	G-2
IC7104	F-1
IC7105	H-2

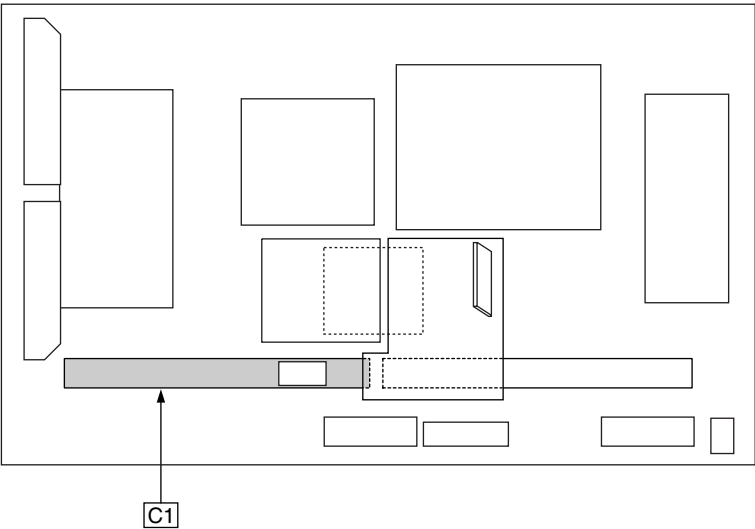

C1-BOARD (FOIL SIDE)
TNPA3812

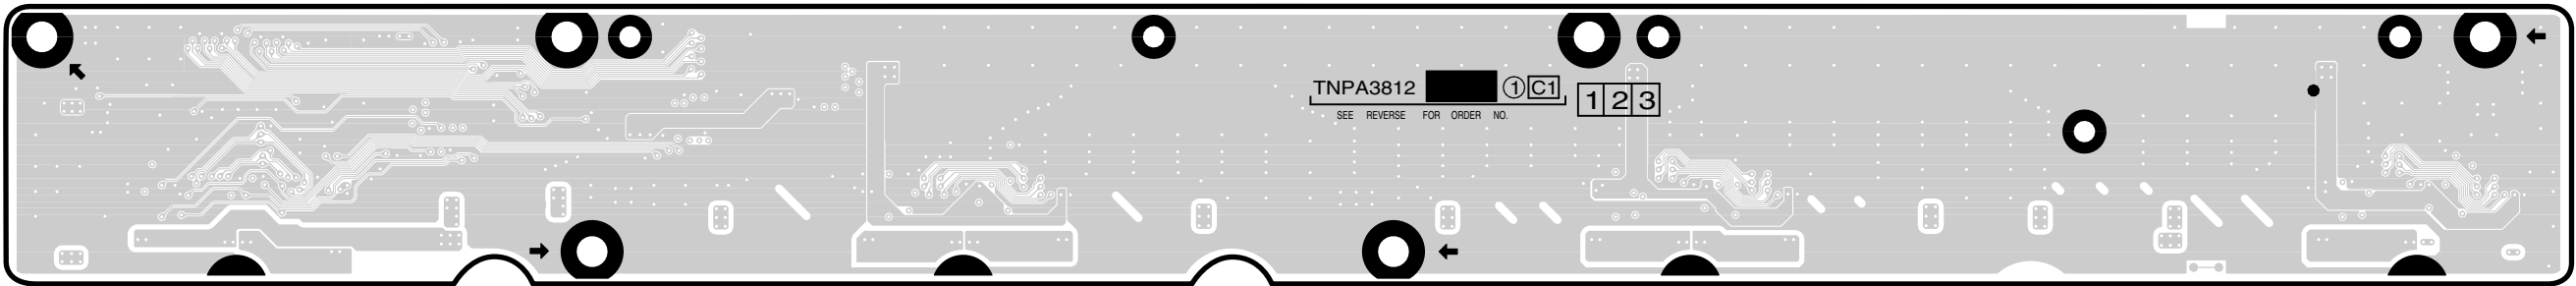


C1-BOARD (COMPONENT SIDE)
TNPA3812

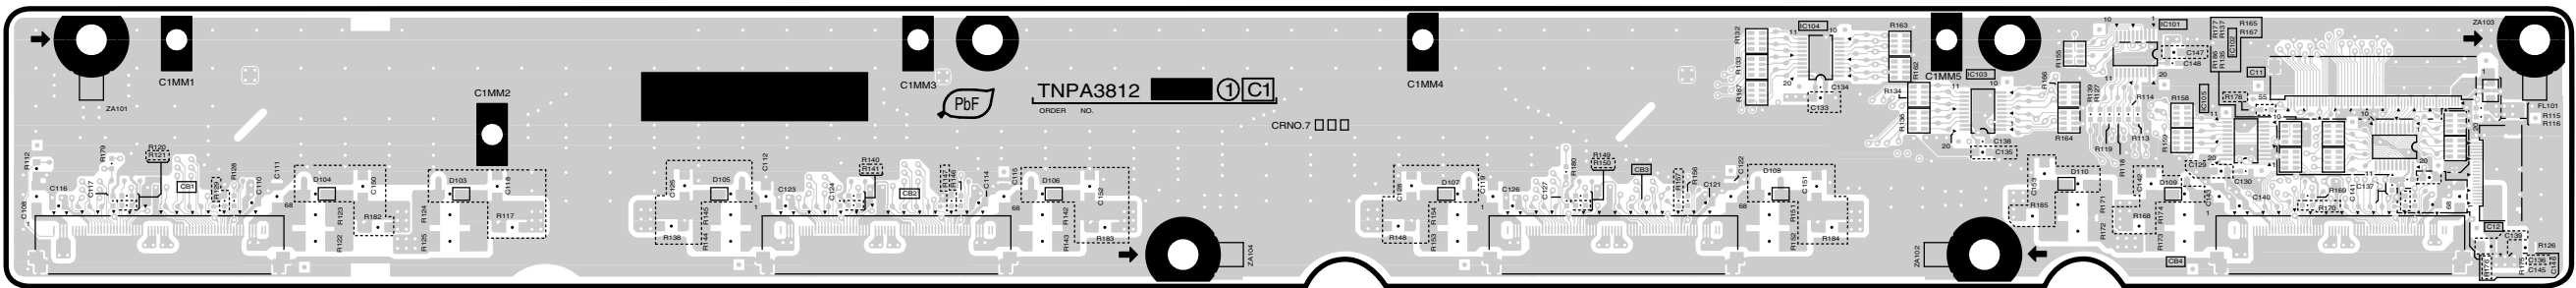


Parts Location


C2-BOARD	
IC	
IC7201	B-2
IC7202	A-1
IC7203	B-2
IC7204	C-2
IC7205	B-1

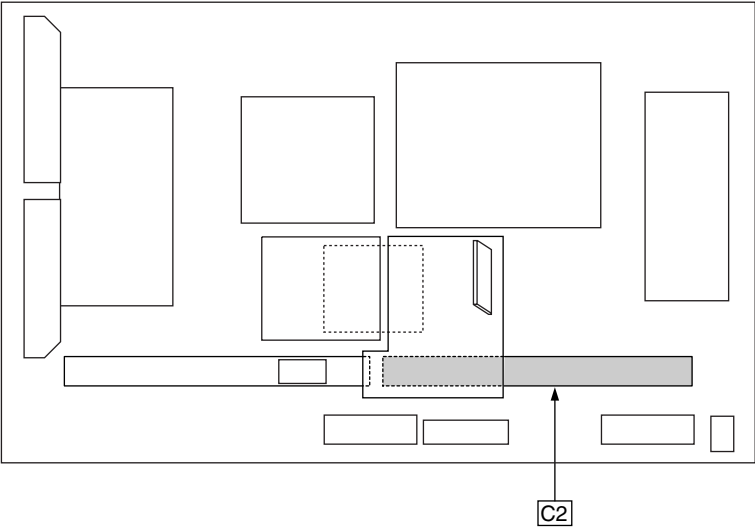



C2-BOARD (FOIL SIDE)
TNPA3813

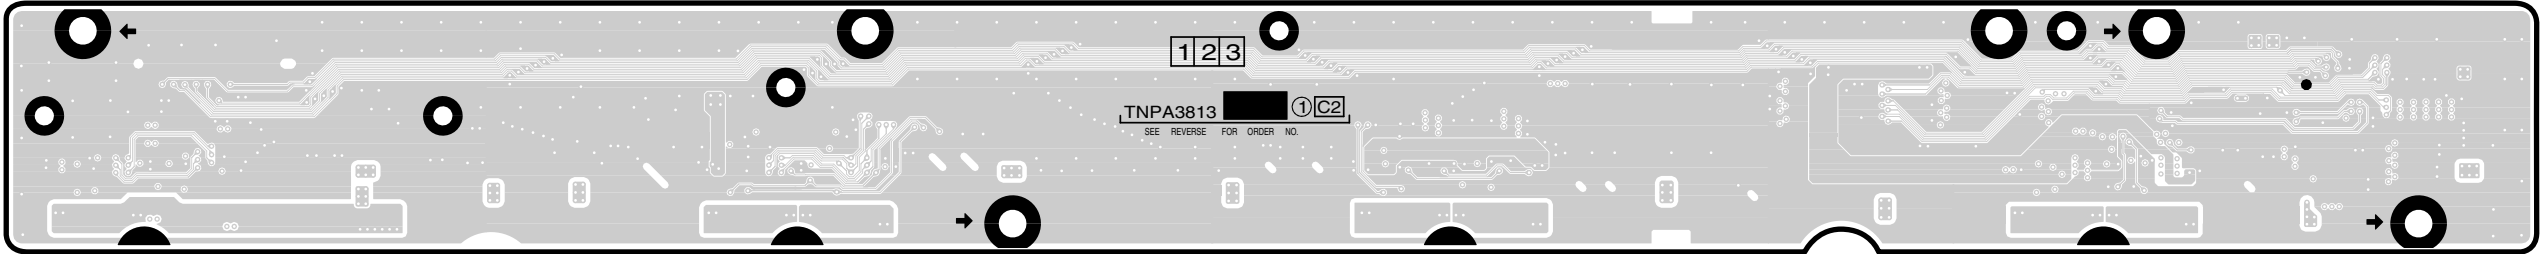

C2-BOARD (COMPONENT SIDE)
TNPA3813

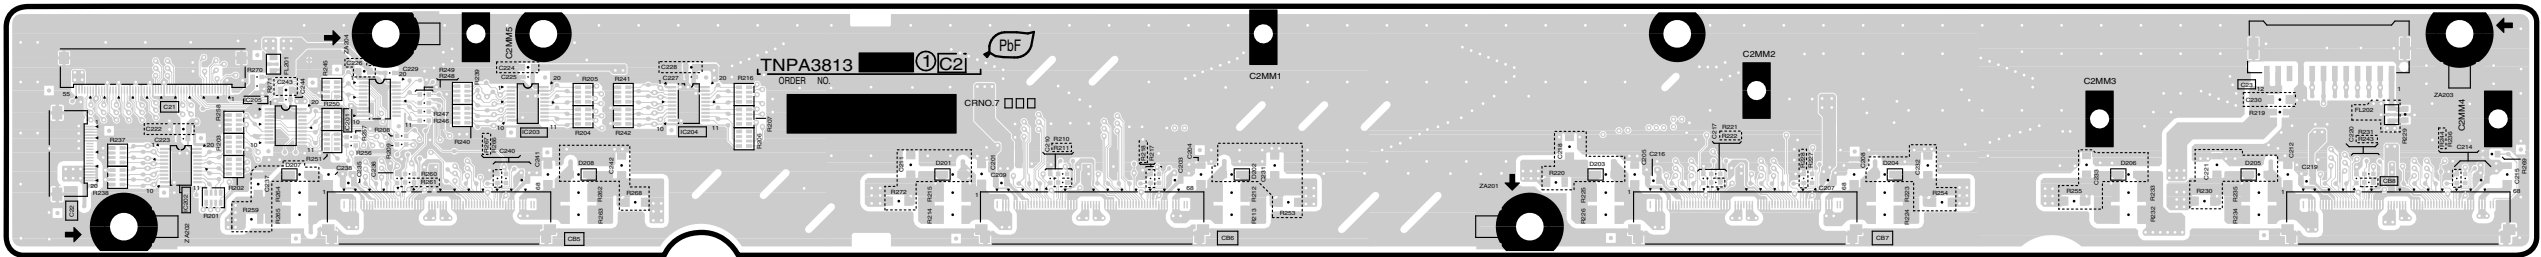



D-BOARD (COMPONENT SIDE)
TZTNP01BJTB

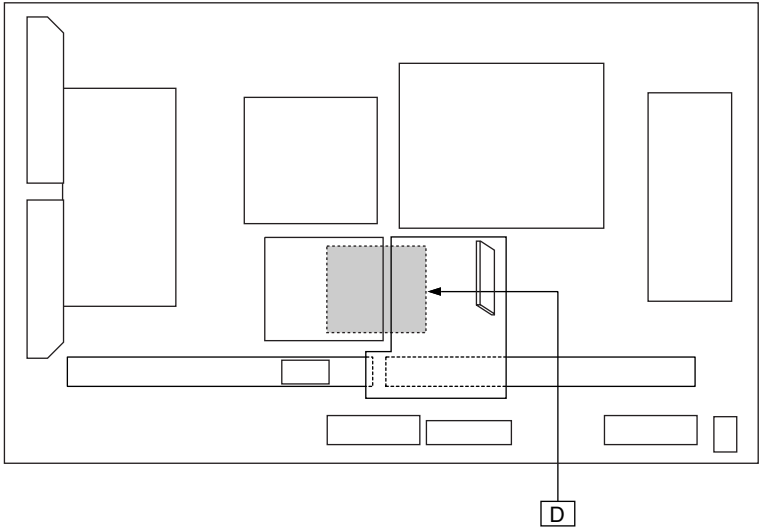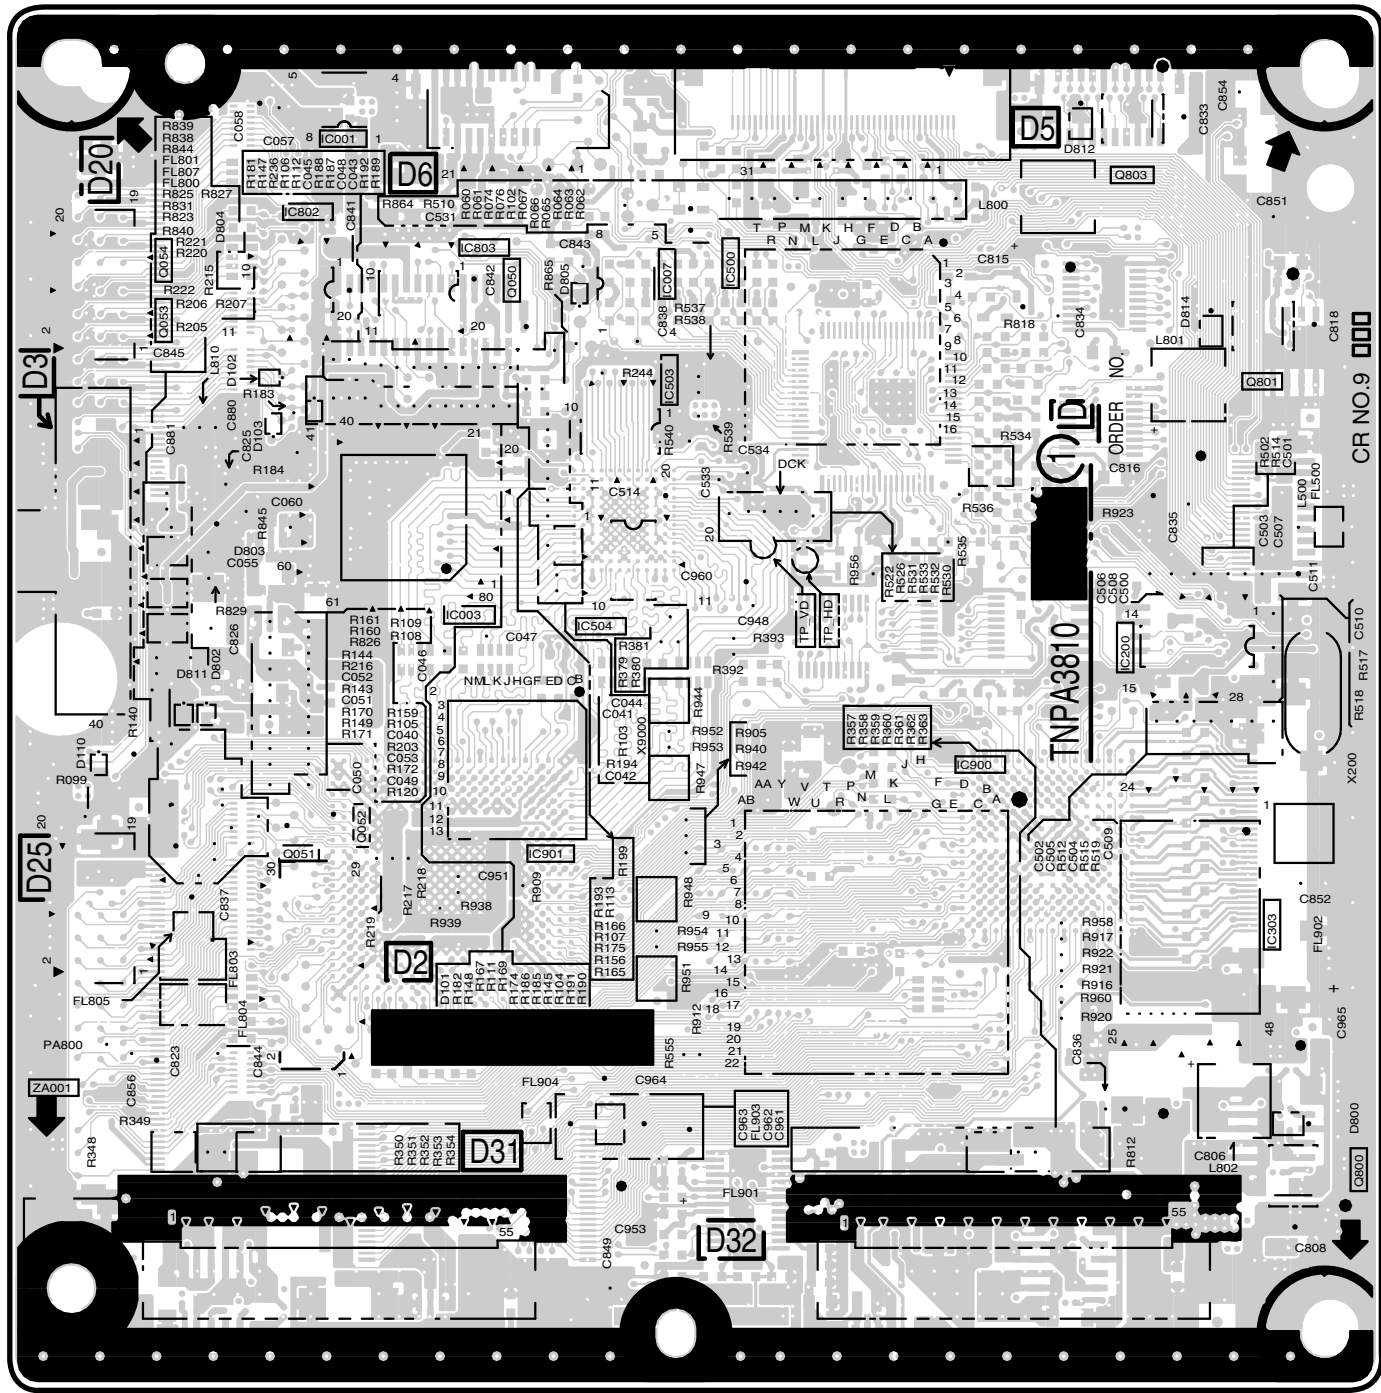

Parts Location

D-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC9001	B-5	Q9050	C-5
IC9003	C-4	Q9051	B-3
IC9007	C-5	Q9052	B-3
IC9200	E-4	Q9053	B-5
IC9303	E-3	Q9054	B-5
IC9500	D-5	Q9800	F-2
IC9503	C-4	Q9801	E-4
IC9504	C-4	Q9803	E-5
IC9802	B-5	TP	
IC9803	C-5	TP-HD	D-4
IC9900	D-3		
IC9901	C-3	TP-VD	D-4



D-BOARD (FOIL SIDE)
TZTNP01BJTB

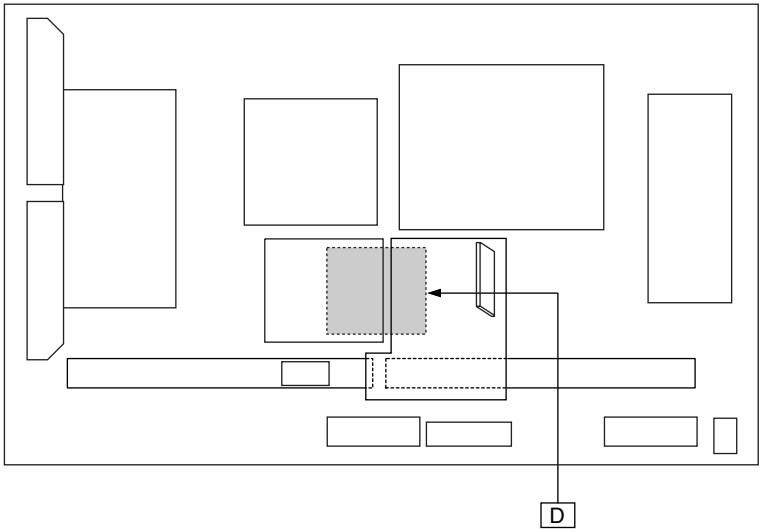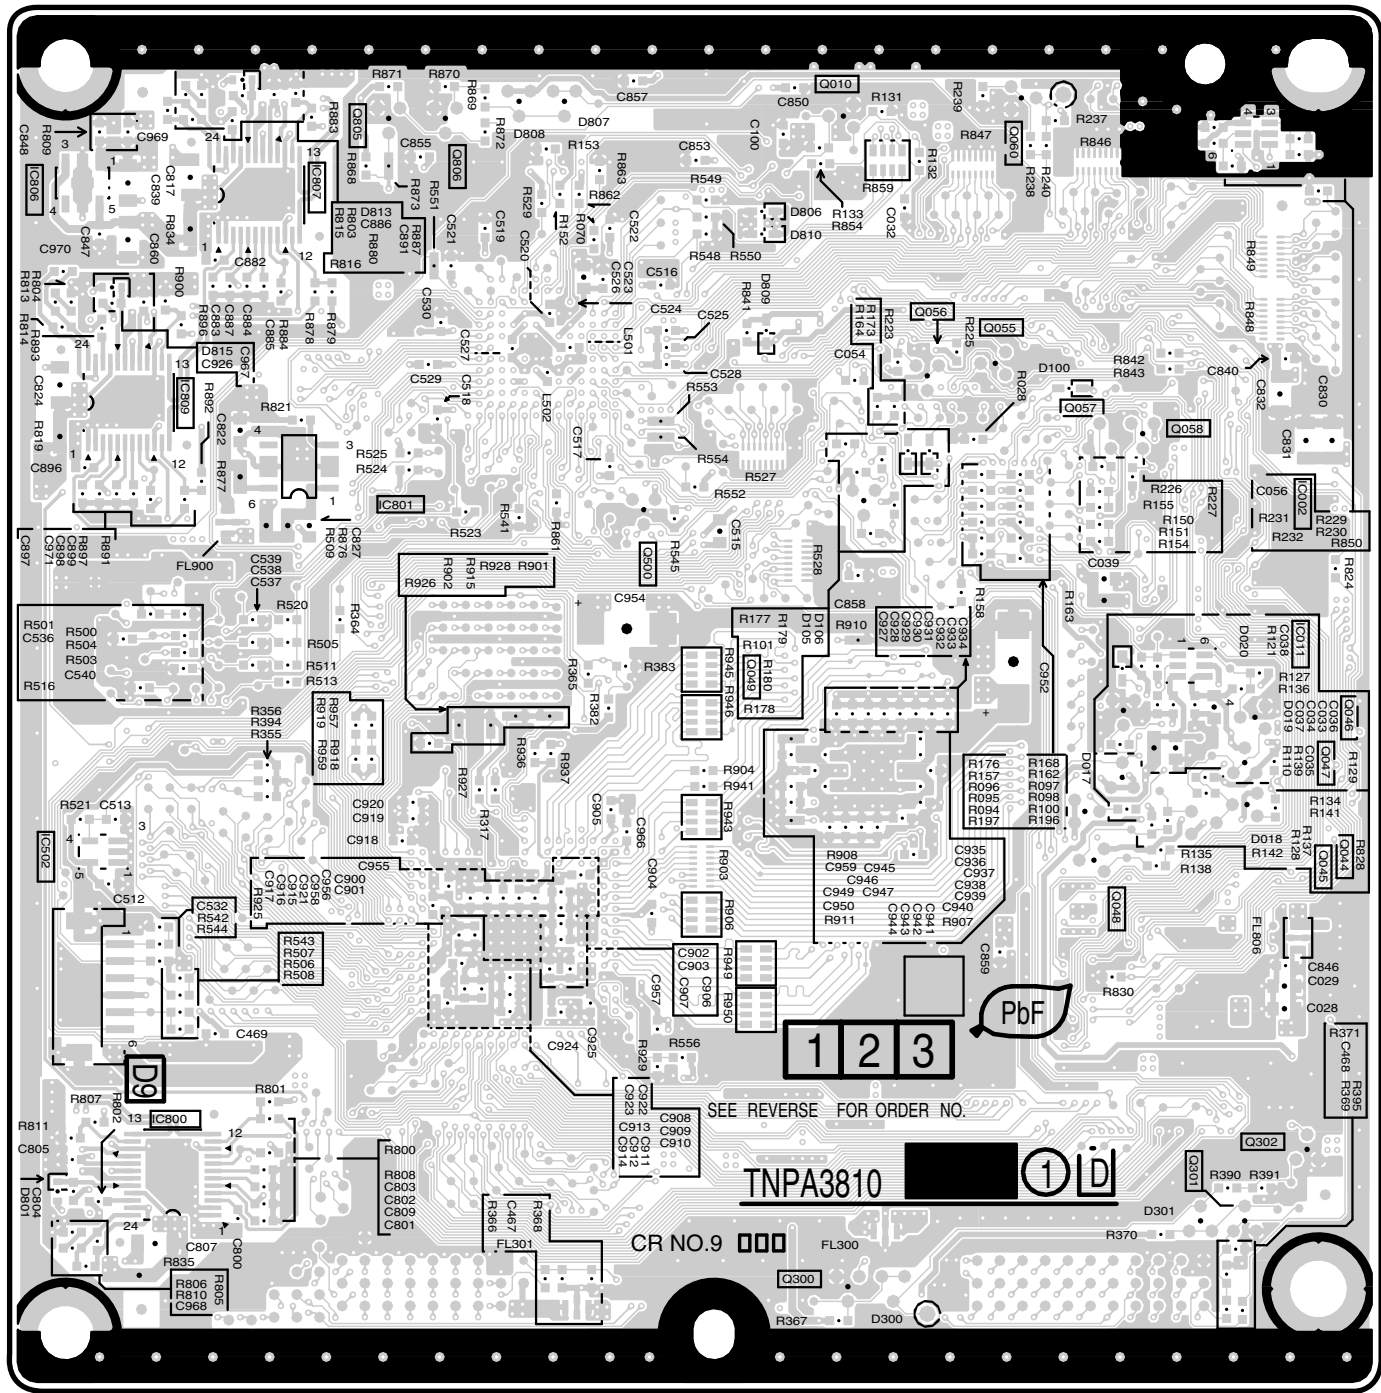

Parts Location

D-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC9002	E-4	Q9010	D-5
IC9011	E-4	Q9044	E-3
IC9502	A-3	Q9045	E-3
IC9800	B-2	Q9046	E-3
IC9801	B-4	Q9047	E-3
IC9806	A-5	Q9048	E-3
IC9807	B-5	Q9049	D-3
IC9809	B-4	Q9055	D-5
		Q9056	D-5
		Q9057	E-4
		Q9058	E-4
		Q9060	D-5
		Q9300	D-2
		Q9301	E-2
		Q9302	E-2
		Q9500	C-4
		Q9805	B-5
		Q9806	C-5

DG-BOARD (COMPONENT SIDE)
TNPA3756CS (PV60H/M/MT)
TNPA3756CP (PV60A)

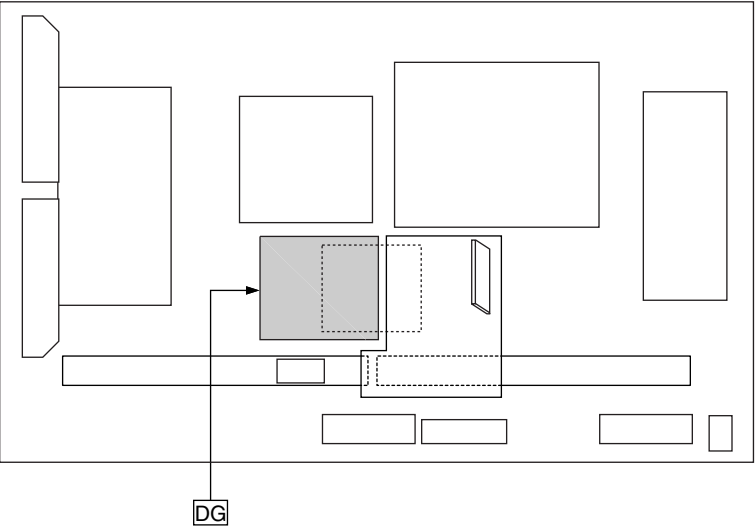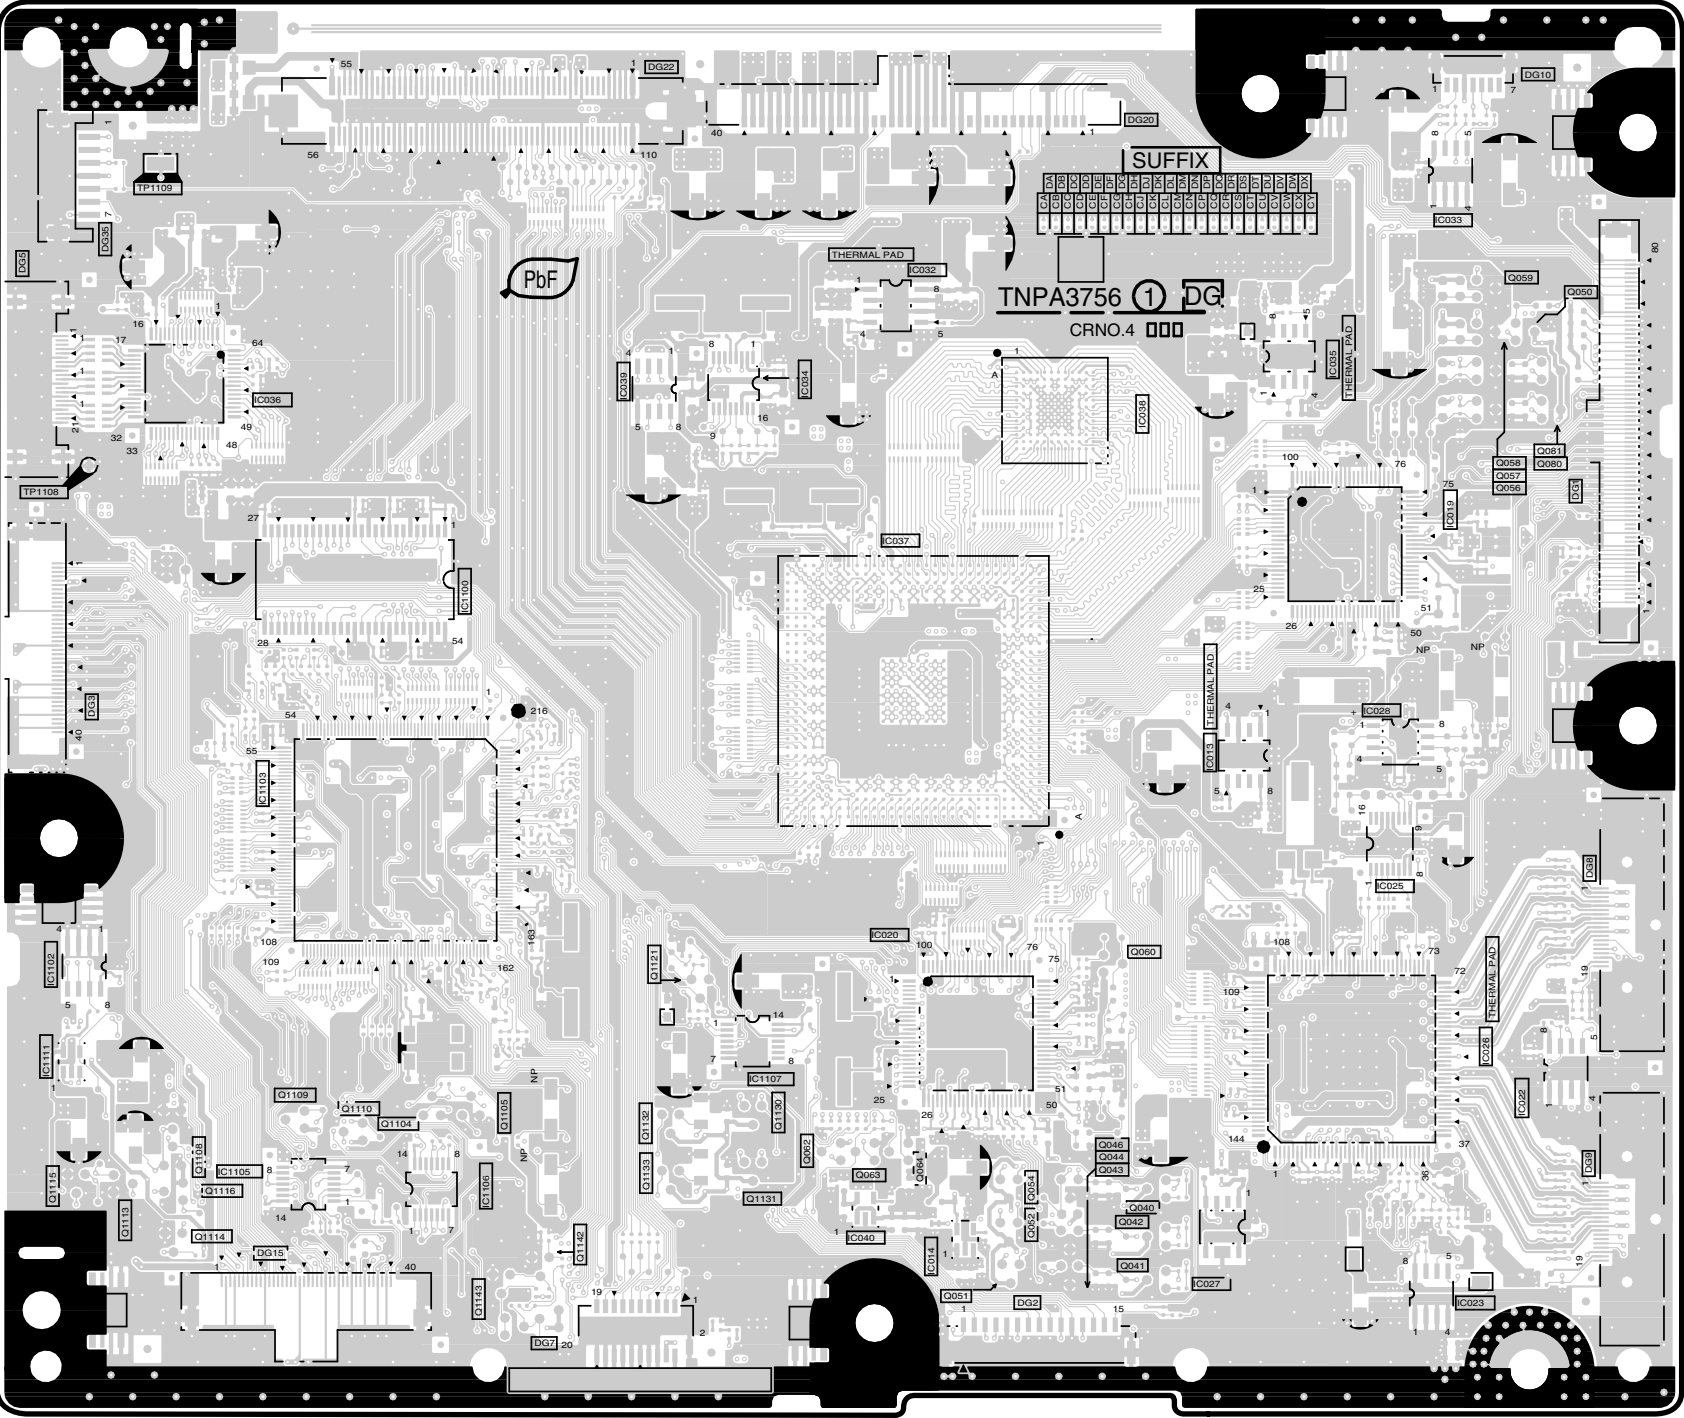


Parts Location

DG-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR			
IC1100	C-4	Q1104	B-2	Q4056	F-4
IC1102	A-2	Q1105	C-2	Q4057	F-4
IC1103	B-3	Q1108	B-2	Q4058	F-4
IC1105	B-2	Q1109	B-2	Q4059	F-5
IC1106	C-2	Q1110	B-2	Q4060	E-2
IC1107	D-2	Q1113	A-2	Q4062	D-2
IC1111	A-2	Q1114	B-2	Q4063	D-2
IC4013	E-3	Q1115	A-2	Q4064	D-2
IC4014	D-1	Q1116	B-2	Q4080	F-4
IC4019	F-4	Q1121	C-2	Q4081	F-4
IC4020	D-3	Q1130	D-2	TP	
IC4022	F-2	Q1131	D-2	TP1108	A-4
IC4023	F-1	Q1132	C-2	TP1109	A-5
IC4025	F-3	Q1133	C-2		
IC4026	F-2	Q1142	C-1		
IC4027	E-1	Q1143	C-1		
IC4028	F-3	Q4040	E-2		
IC4032	D-5	Q4041	E-1		
IC4033	F-5	Q4042	E-2		
IC4034	D-4	Q4043	E-2		
IC4035	E-4	Q4044	E-2		
IC4036	B-4	Q4046	E-2		
IC4037	D-4	Q4050	F-5		
IC4038	E-4	Q4051	D-1		
IC4039	C-4	Q4052	D-2		
IC4040	D-2	Q4054	D-2		



DG-BOARD (FOIL SIDE)					
IC		Q4045 Q4053 Q4055 Q4061 Q4065 Q4066 Q4067 Q4068 Q4069 Q4070 Q4071 Q4073 Q4074 Q4075 Q4076 Q4077 Q4078 Q4079 Q4082 Q4083 Q4084 Q4918 Q4919	C-2 A-3 D-2 A-2 A-2 B-2 B-2 B-1 A-2 B-3 B-2 B-3 A-3 B-3 B-2 B-2 B-1 E-2 E-2	TP	
IC1101	E-3			TP1101	F-3
IC1104	F-2			TP1102	F-3
IC1110	F-2			TP1103	F-2
IC4016	B-3			TP1104	F-2
IC4017	B-2			TP1105	F-2
IC4018	B-4			TP1106	F-2
IC4024	B-2			TP1107	F-2
IC4029	C-4			TP1113	C-5
IC4030	C-3			TP1114	B-5
TRANSISTOR				TP1115	D-5
Q1100	E-3			TP1116	D-5
Q1101	E-3			TP1117	C-5
Q1102	E-3	TP1118	D-5		
Q1103	E-3	TP1119	D-5		
Q1106	E-1	TP1120	F-3		
Q1107	E-2	TP4028	B-4		
Q1111	F-2	TP4029	B-3		
Q1112	F-2	TP4030	B-3		
Q1117	D-3	TP4031	A-2		
Q1118	D-3	TP4032	A-4		
Q1120	E-3	TP4033	A-3		
Q1122	D-2	TP4034	A-1		
Q1125	E-3	TP4035	B-1		
Q1134	E-2	TP4036	B-1		
Q1135	E-2	TP4037	D-4		
Q1137	F-2	TP4038	B-5		
Q1138	D-2	TP4039	B-5		
Q1139	E-3	TP4040	B-5		
Q1140	F-2	TP4041	C-4		
Q1141	F-2	TP4064	B-1		
		TP4065	B-1		
		TP4066	B-2		

TH-42PV60H/M/MT	TH-42PV60A
DG-BOARD TNPA3756CS	DG-BOARD TNPA3756CP

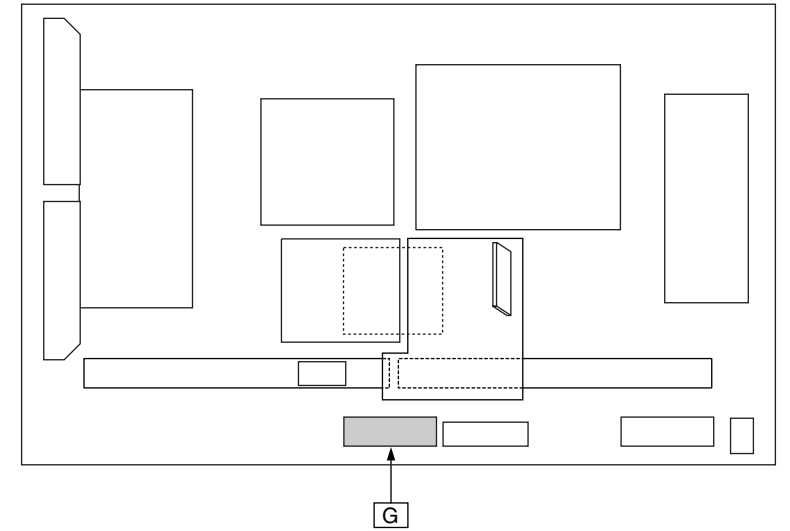

Top view of the TNP3848 PCB assembly. The board is populated with various components including resistors (R3754, R3755, R3756, R3757, R3758, R3759, R3760, R3761, R3762, R3763, R3764, R3765, R3766, R3767, R3768, R3769, R3770, R3771, R3772, R3773, R3774, R3775, R3776, R3777, R3778, R3779, R3780, R3781, R3782, R3783, R3784, R3785, R3786, R3787, R3788, R3789, R3790, R3791, R3792, R3793, R3794, R3795, R3796, R3797, R3798, R3799, R3800, R3801, R3802, R3803, R3804, R3805, R3806, R3807, R3808, R3809, R3810, R3811, R3812, R3813, R3814, R3815, R3816, R3817, R3818, R3819, R3820, R3821, R3822, R3823, R3824, R3825, R3826, R3827, R3828, R3829, R3830, R3831, R3832, R3833, R3834, R3835, R3836, R3837, R3838, R3839, R3840, R3841, R3842, R3843, R3844, R3845, R3846, R3847, R3848, R3849, R3850, R3851, R3852, R3853, R3854, R3855, R3856, R3857, R3858, R3859, R3860, R3861, R3862, R3863, R3864, R3865, R3866, R3867, R3868, R3869, R3870, R3871, R3872, R3873, R3874, R3875, R3876, R3877, R3878, R3879, R3880, R3881, R3882, R3883, R3884, R3885, R3886, R3887, R3888, R3889, R3890, R3891, R3892, R3893, R3894, R3895, R3896, R3897, R3898, R3899, R3900, R3901, R3902, R3903, R3904, R3905, R3906, R3907, R3908, R3909, R3910, R3911, R3912, R3913, R3914, R3915, R3916, R3917, R3918, R3919, R3920, R3921, R3922, R3923, R3924, R3925, R3926, R3927, R3928, R3929, R3930, R3931, R3932, R3933, R3934, R3935, R3936, R3937, R3938, R3939, R3940, R3941, R3942, R3943, R3944, R3945, R3946, R3947, R3948, R3949, R3950, R3951, R3952, R3953, R3954, R3955, R3956, R3957, R3958, R3959, R3960, R3961, R3962, R3963, R3964, R3965, R3966, R3967, R3968, R3969, R3970, R3971, R3972, R3973, R3974, R3975, R3976, R3977, R3978, R3979, R3980, R3981, R3982, R3983, R3984, R3985, R3986, R3987, R3988, R3989, R3990, R3991, R3992, R3993, R3994, R3995, R3996, R3997, R3998, R3999, R4000, R4001, R4002, R4003, R4004, R4005, R4006, R4007, R4008, R4009, R4010, R4011, R4012, R4013, R4014, R4015, R4016, R4017, R4018, R4019, R4020, R4021, R4022, R4023, R4024, R4025, R4026, R4027, R4028, R4029, R4030, R4031, R4032, R4033, R4034, R4035, R4036, R4037, R4038, R4039, R4040, R4041, R4042, R4043, R4044, R4045, R4046, R4047, R4048, R4049, R4050, R4051, R4052, R4053, R4054, R4055, R4056, R4057, R4058, R4059, R4060, R4061, R4062, R4063, R4064, R4065, R4066, R4067, R4068, R4069, R4070, R4071, R4072, R4073, R4074, R4075, R4076, R4077, R4078, R4079, R4080, R4081, R4082, R4083, R4084, R4085, R4086, R4087, R4088, R4089, R4090, R4091, R4092, R4093, R4094, R4095, R4096, R4097, R4098, R4099, R4100, R4101, R4102, R4103, R4104, R4105, R4106, R4107, R4108, R4109, R4110, R4111, R4112, R4113, R4114, R4115, R4116, R4117, R4118, R4119, R4120, R4121, R4122, R4123, R4124, R4125, R4126, R4127, R4128, R4129, R4130, R4131, R4132, R4133, R4134, R4135, R4136, R4137, R4138, R4139, R4140, R4141, R4142, R4143, R4144, R4145, R4146, R4147, R4148, R4149, R4150, R4151, R4152, R4153, R4154, R4155, R4156, R4157, R4158, R4159, R4160, R4161, R4162, R4163, R4164, R4165, R4166, R4167, R4168, R4169, R4170, R4171, R4172, R4173, R4174, R4175, R4176, R4177, R4178, R4179, R4180, R4181, R4182, R4183, R4184, R4185, R4186, R4187, R4188, R4189, R4190, R4191, R4192, R4193, R4194, R4195, R4196, R4197, R4198, R4199, R4200, R4201, R4202, R4203, R4204, R4205, R4206, R4207, R4208, R4209, R4210, R4211, R4212, R4213, R4214, R4215, R4216, R4217, R4218, R4219, R4220, R4221, R4222, R4223, R4224, R4225, R4226, R4227, R4228, R4229, R4230, R4231, R4232, R4233, R4234, R4235, R4236, R4237, R4238, R4239, R4240, R4241, R4242, R4243, R4244, R4245, R4246, R4247, R4248, R4249, R4250, R4251, R4252, R4253, R4254, R4255, R4256, R4257, R4258, R4259, R4260, R4261, R4262, R4263, R4264, R4265, R4266, R4267, R4268, R4269, R4270, R4271, R4272, R4273, R4274, R4275, R4276, R4277, R4278, R4279, R4280, R4281, R4282, R4283, R4284, R4285, R4286, R4287, R4288, R4289, R4290, R4291, R4292, R4293, R4294, R4295, R4296, R4297, R4298, R4299, R4300, R4301, R4302, R4303, R4304, R4305, R4306, R4307, R4308, R4309, R4310, R4311, R4312, R4313, R4314, R4315, R4316, R4317, R4318, R4319, R4320, R4321, R4322, R4323, R4324, R4325, R4326, R4327, R4328, R4329, R4330, R4331, R4332, R4333, R4334, R4335, R4336, R4337, R4338, R4339, R4340, R4341, R4342, R4343, R4344, R4345, R4346, R4347, R4348, R4349, R4350, R4351, R4352, R4353, R4354, R4355, R4356, R4357, R4358, R4359, R4360, R4361, R4362, R4363, R4364, R4365, R4366, R4367, R4368, R4369, R4370, R4371, R4372, R4373, R4374, R4375, R4376, R4377, R4378, R4379, R4380, R4381, R4382, R4383, R4384, R4385, R4386, R4387, R4388, R4389, R4390, R4391, R4392, R4393, R4394, R4395, R4396, R4397, R4398, R4399, R4400, R4401, R4402, R4403, R4404, R4405, R4406, R4407, R4408, R4409, R4410, R4411, R4412, R4413, R4414, R4415, R4416, R4417, R4418, R4419, R4420, R4421, R4422, R4423, R4424, R4425, R442

Front view of the TNPA3848 remote control. The device is black with a silver-colored top edge. It features a series of buttons: a small 'ON/OFF' button on the left, followed by 'TV GUIDE', 'PRESET', 'MENU', 'ASPECT', 'TV/VRT', 'VOL DN', 'VOL UP', 'CH DN', 'CH UP', and 'TV/VRT' on the right. The model number 'TNPA3848' is printed in the center. A 'GK 1' logo and a 'PbF' (Pb-free) symbol are also visible.

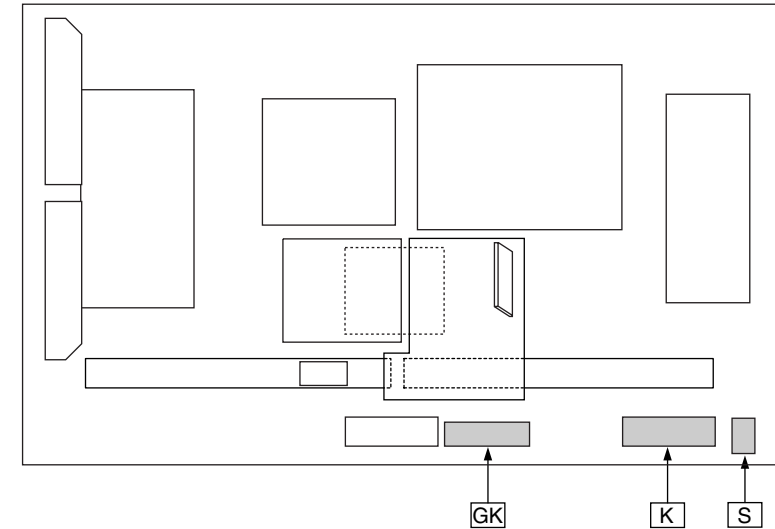


Diagram of the back of the TNPFA3763 module. Labels include: S2, S1, SW2500, C2500, R2504, and PbF. Pin numbers 1, 2, and 3 are indicated near the S2 and S1 components. The text "TNPFA3763" and "SEE REVERSE FOR ORDER NO." is printed on the board.


Diagram of the SW2500 component showing various features and labels:

- TPNA3763**: Label on the left side of the component.
- ORDER NO.**: Label below the left side of the component.
- SW2500**: Label at the bottom center of the component.
- (1) S**: Label in a circle on the bottom left.
- 1 S1 3**: Label on the right side, indicating a feature with a square symbol and the number 1.
- 1 S2 2**: Label on the right side, indicating a feature with a square symbol and the number 1.

TH-42PV60A/H/M/MT
GK-BOARD TNPA3848AD
K-BOARD TNPA3762AE
S-BOARD TNPA3763AC


TH-42PV60A/H/M/MT
GK-BOARD TNPA3848AD
K-BOARD TNPA3762AE
S-BOARD TNPA3763AC

H-BOARD (COMPONENT SIDE)
TNPA3760AD

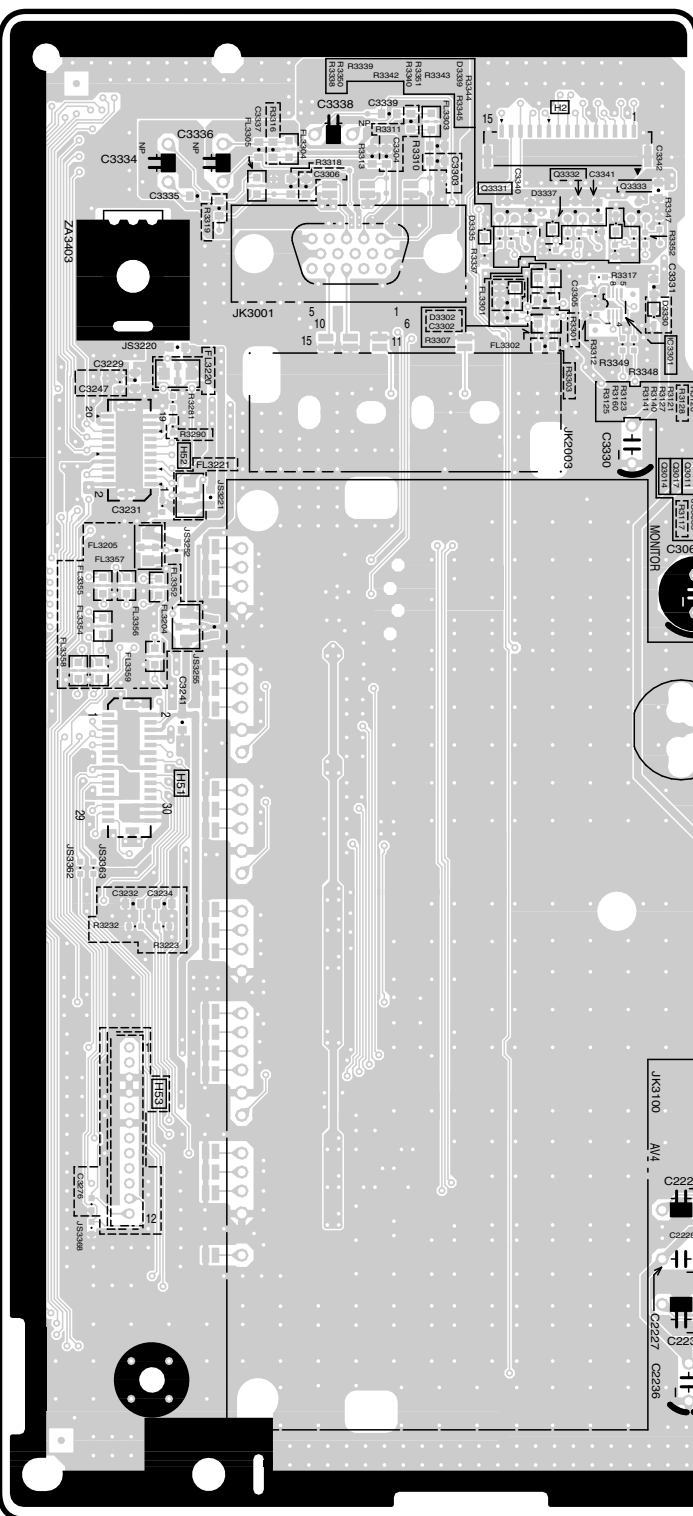


Parts Location


H-BOARD (COMPONENT SIDE)						
IC	TRANSISTOR					
IC2103	F-4	Q2011	D-4	Q2300	E-5	Q3018
IC2104	F-4	Q2012	D-4	Q2301	E-4	Q3023
IC2105	D-2	Q2013	D-4	Q2302	E-4	Q3203
IC2106	E-4	Q2102	E-4	Q2314	G-4	Q3204
IC2107	F-3	Q2103	E-4	Q2315	G-4	Q3205
IC2108	F-2	Q2104	F-4	Q2316	G-4	Q3206
IC2109	C-2	Q2105	F-4	Q2317	G-4	Q3207
IC2210	C-1	Q2106	E-2	Q3002	C-4	Q3209
IC3005	D-3	Q2107	F-2	Q3008	G-3	Q3210
IC3200	F-2	Q2108	E-2	Q3011	C-4	Q3331
IC3301	C-5	Q2109	F-2	Q3012	C-4	Q3332
IC5603	G-2	Q2113	G-4	Q3014	C-4	Q3333
		Q2114	G-3	Q3015	C-4	Q5614
				Q3017	C-4	

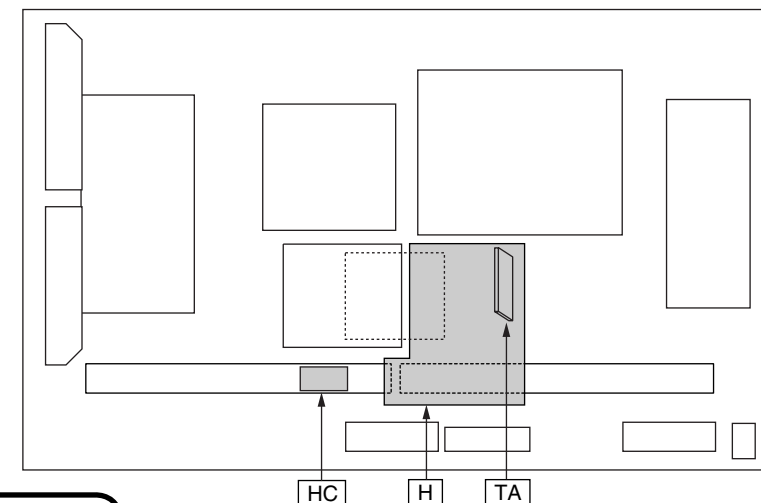

TA-BOARD (COMPONENT SIDE)
TNPA3768AC (TH-42PV60A)
TNPA3768AB (TH-42PV60H/M/MT)

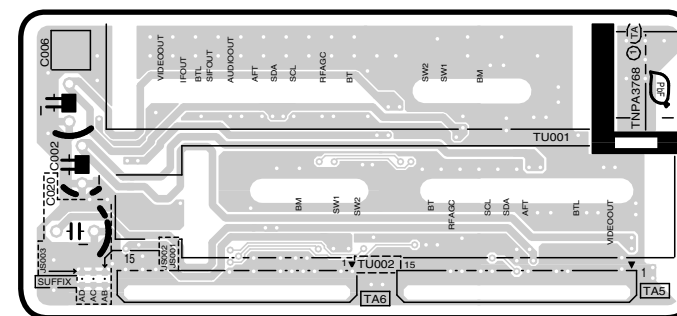

HC-BOARD (COMPONENT SIDE)
TNPA3852

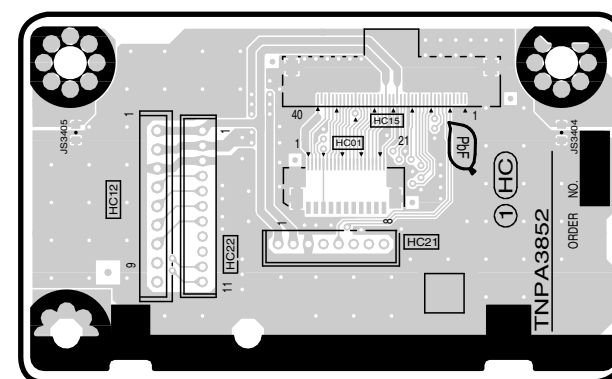


TH-42PV60A/H/M/MT H-BOARD TNPA3760AD
TH-42PV60A/H/M/MT HC-BOARD TNPA3852

TH-42PV60A TA-BOARD TNPA3768AC
TH-42PV60H/M/MT TA-BOARD TNPA3768AB

TH-42PV60A/H/M/MT H-BOARD TNPA3760AD
TH-42PV60A/H/M/MT HC-BOARD TNPA3852

TH-42PV60A TA-BOARD TNPA3768AC
TH-42PV60H/M/MT TA-BOARD TNPA3768AB

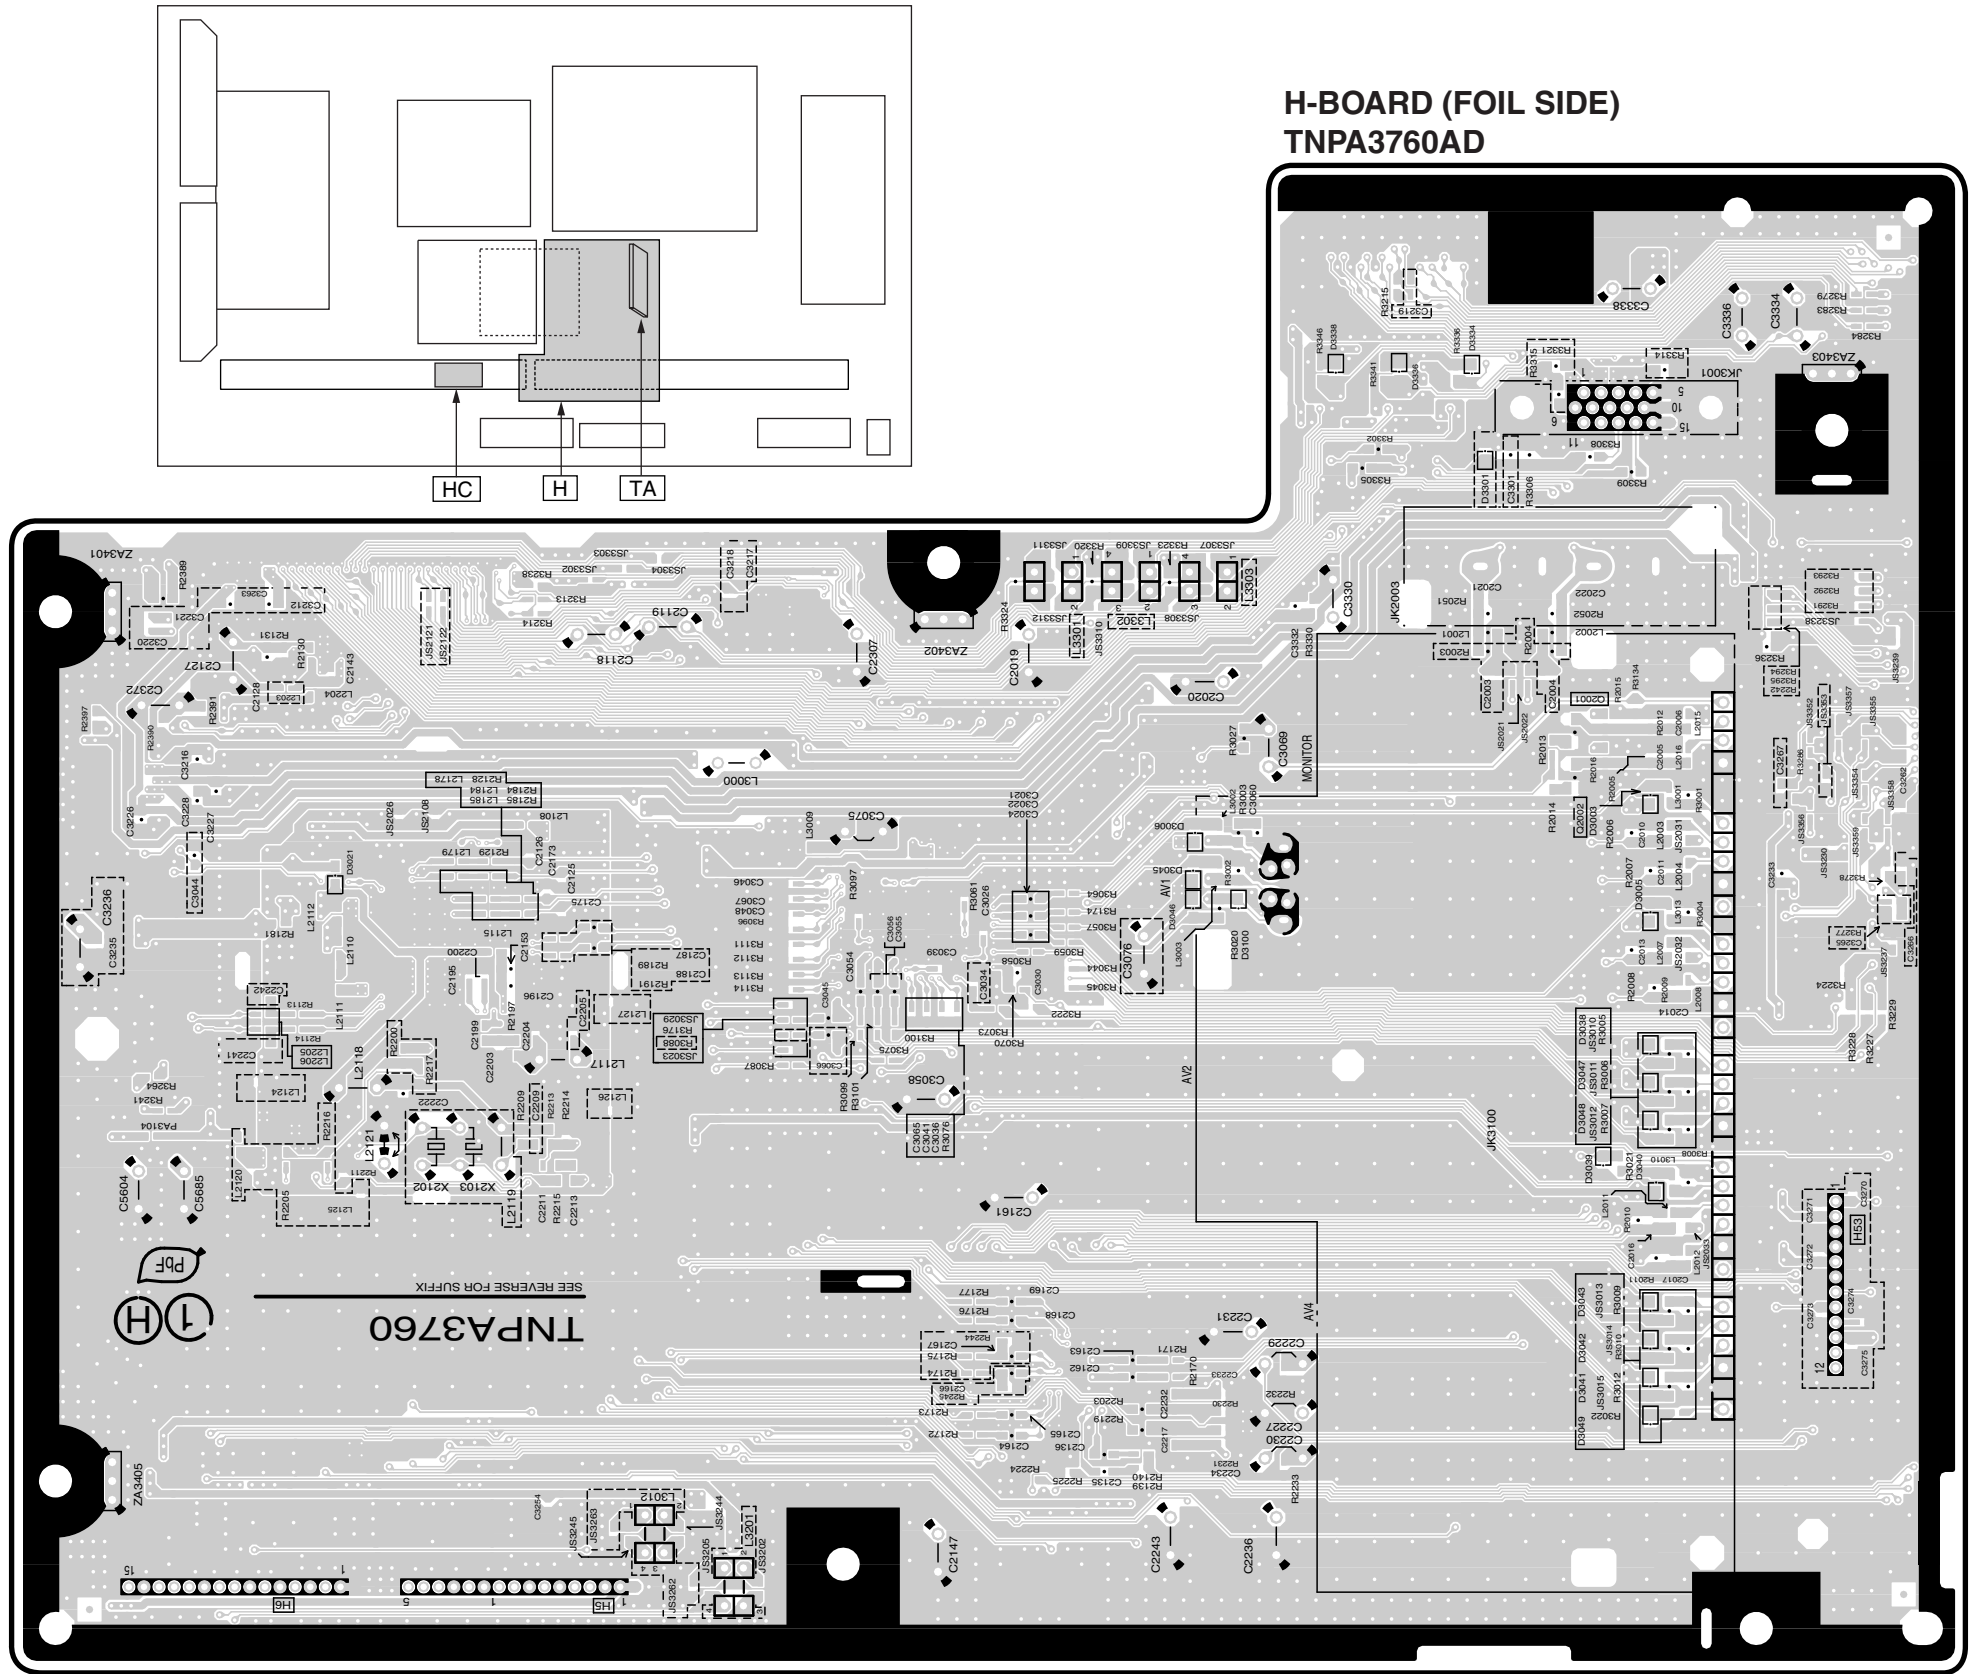

H-BOARD (FOIL SIDE)
TNPA3760AD


Parts Location

H-BOARD (FOIL SIDE)	
TRANSISTOR	
Q2001	F-4
Q2002	F-4


Parts Location

TA-BOARD (FOIL SIDE)	
TRANSISTOR	
Q002	I-3

TA-BOARD (FOIL SIDE)
TNPA3768AC (TH-42PV60A)
TNPA3768AB (TH-42PV60H/M/MT)

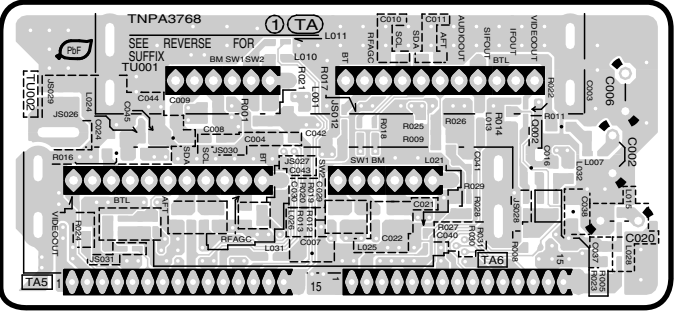

HC-BOARD (FOIL SIDE)
TNPA3852

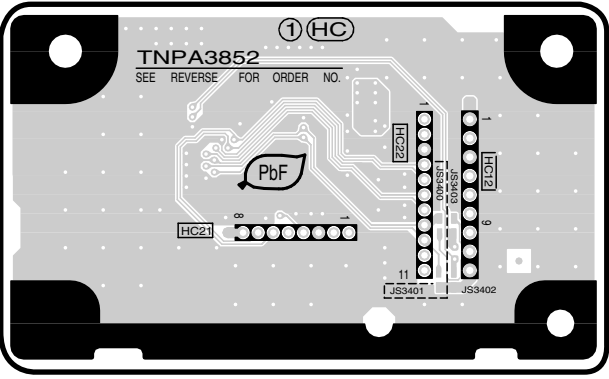


TH-42PV60A/H/M/MT H-BOARD TNPA3760AD
TH-42PV60A/H/M/MT HC-BOARD TNPA3852

TH-42PV60A TA-BOARD TNPA3768AC
TH-42PV60H/M/MT TA-BOARD TNPA3768AB


TH-42PV60A/H/M/MT H-BOARD TNPA3760AD
TH-42PV60A/H/M/MT HC-BOARD TNPA3852


TH-42PV60A TA-BOARD TNPA3768AC
TH-42PV60H/M/MT TA-BOARD TNPA3768AB

P-BOARD (COMPONENT SIDE)
TNPA3911

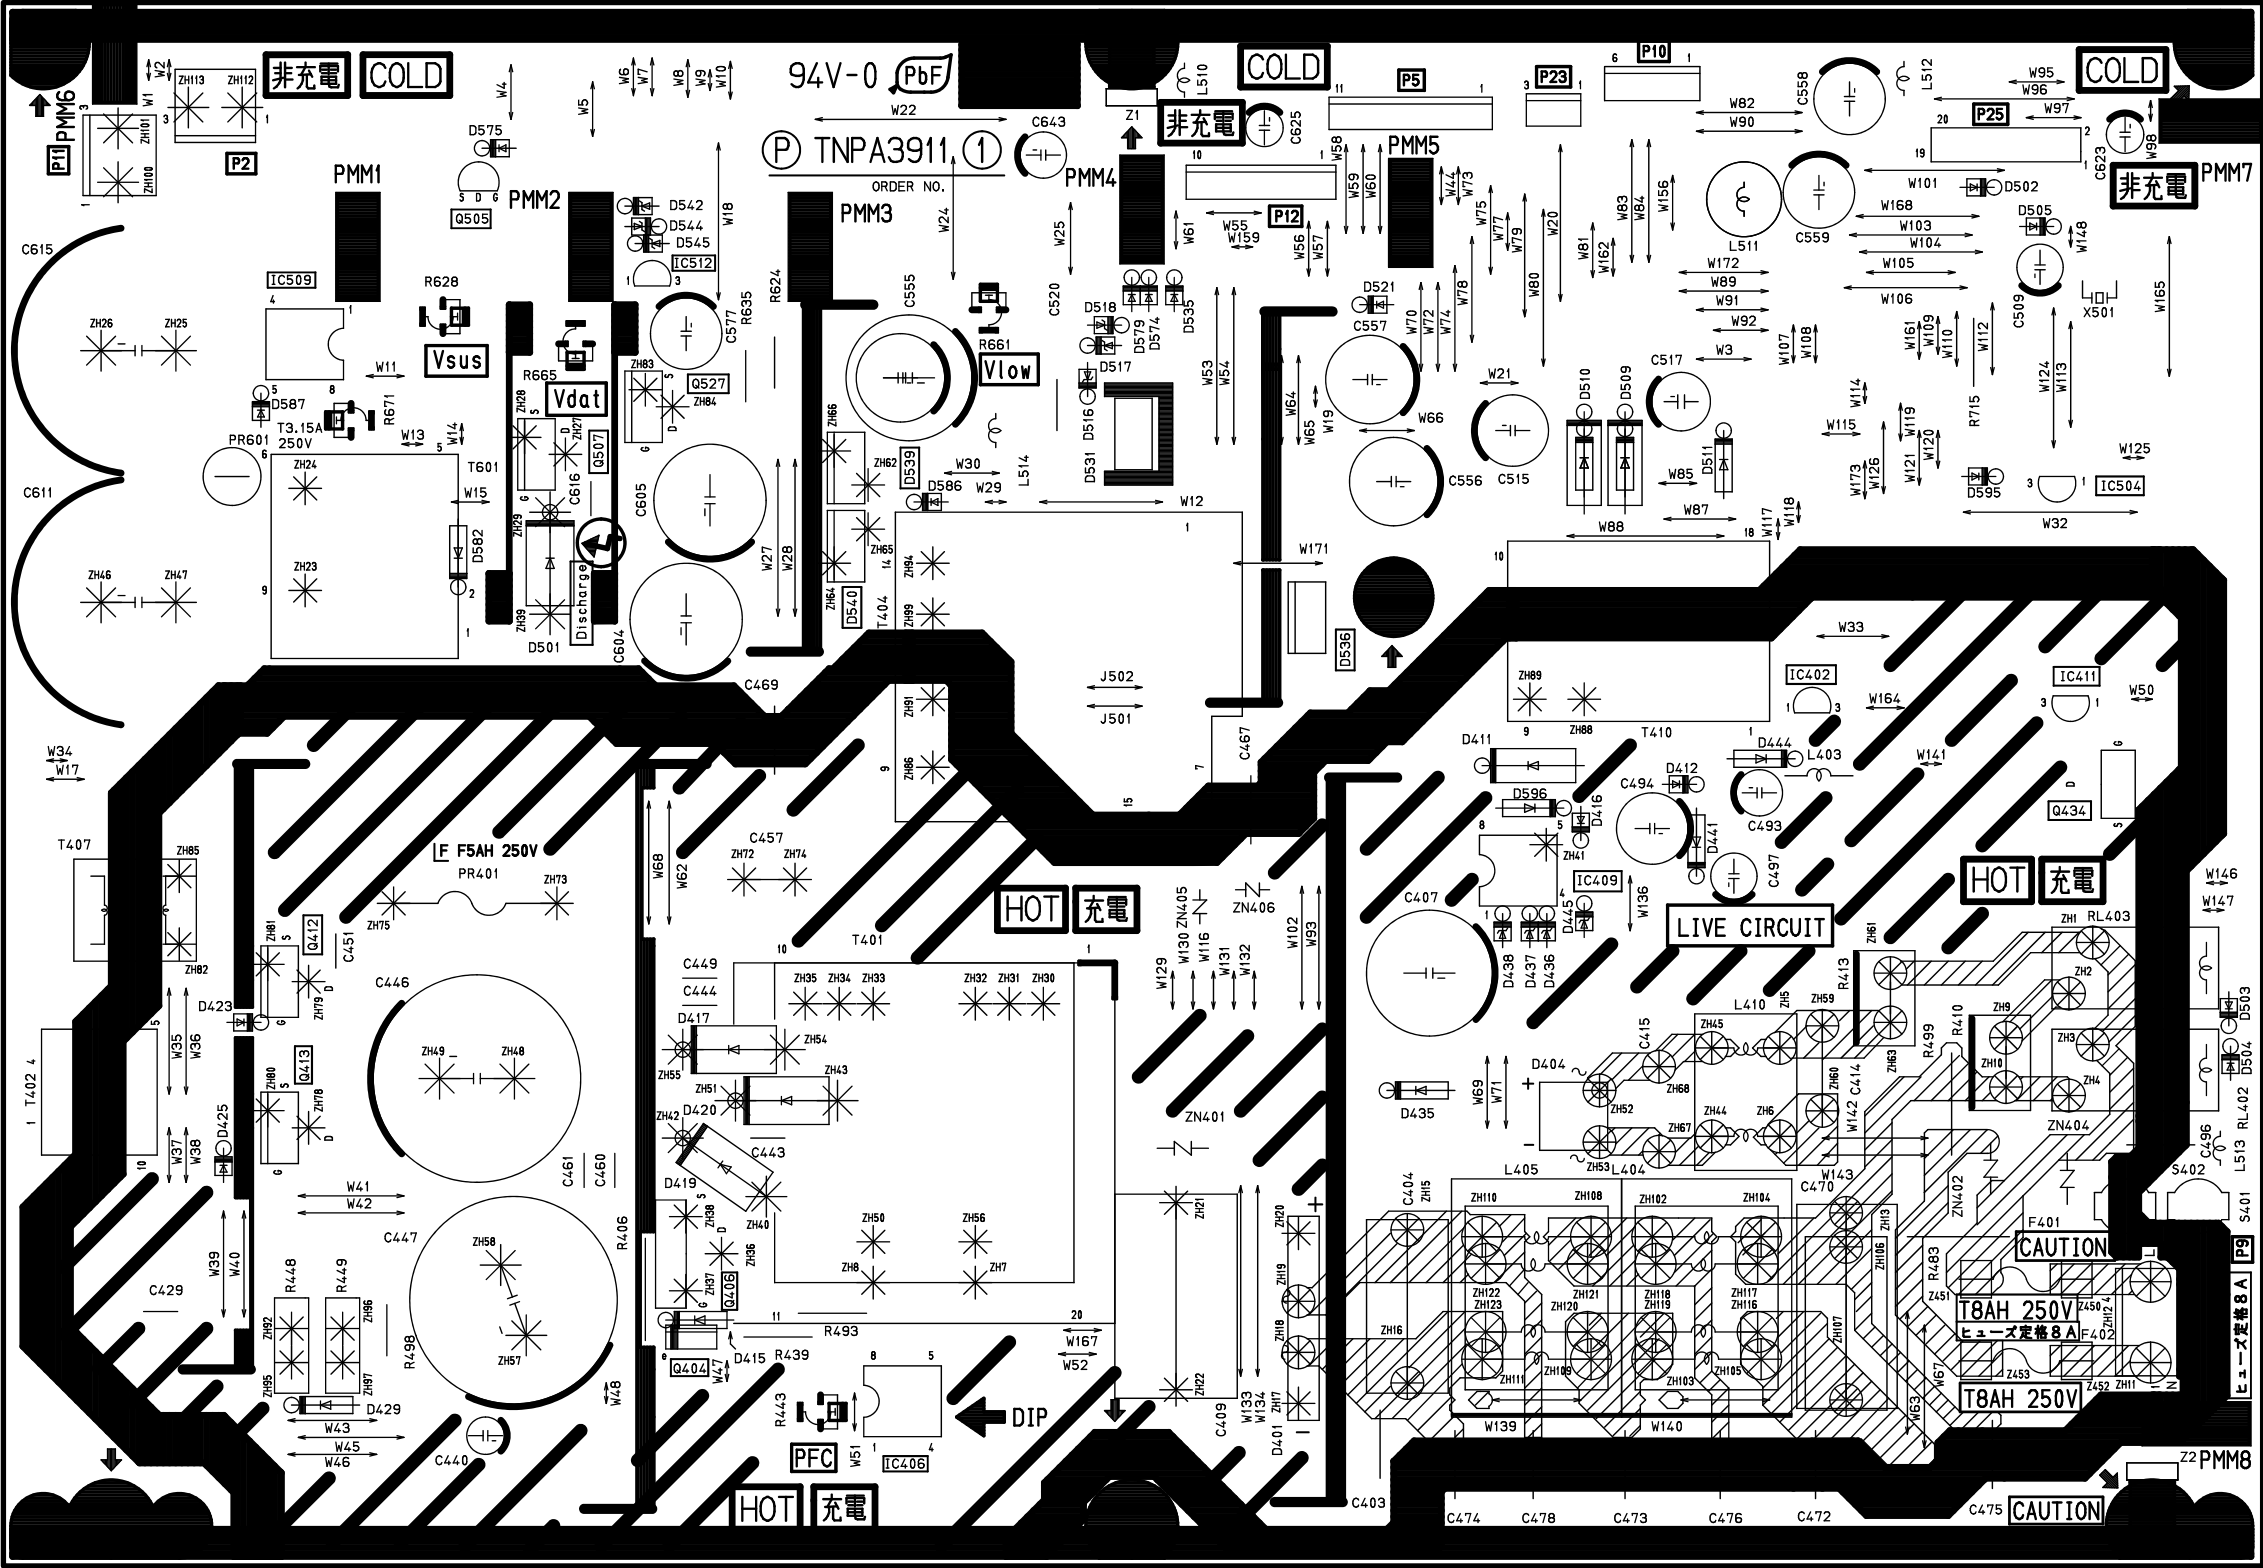

P-BOARD (FOIL SIDE)
TNPA3911

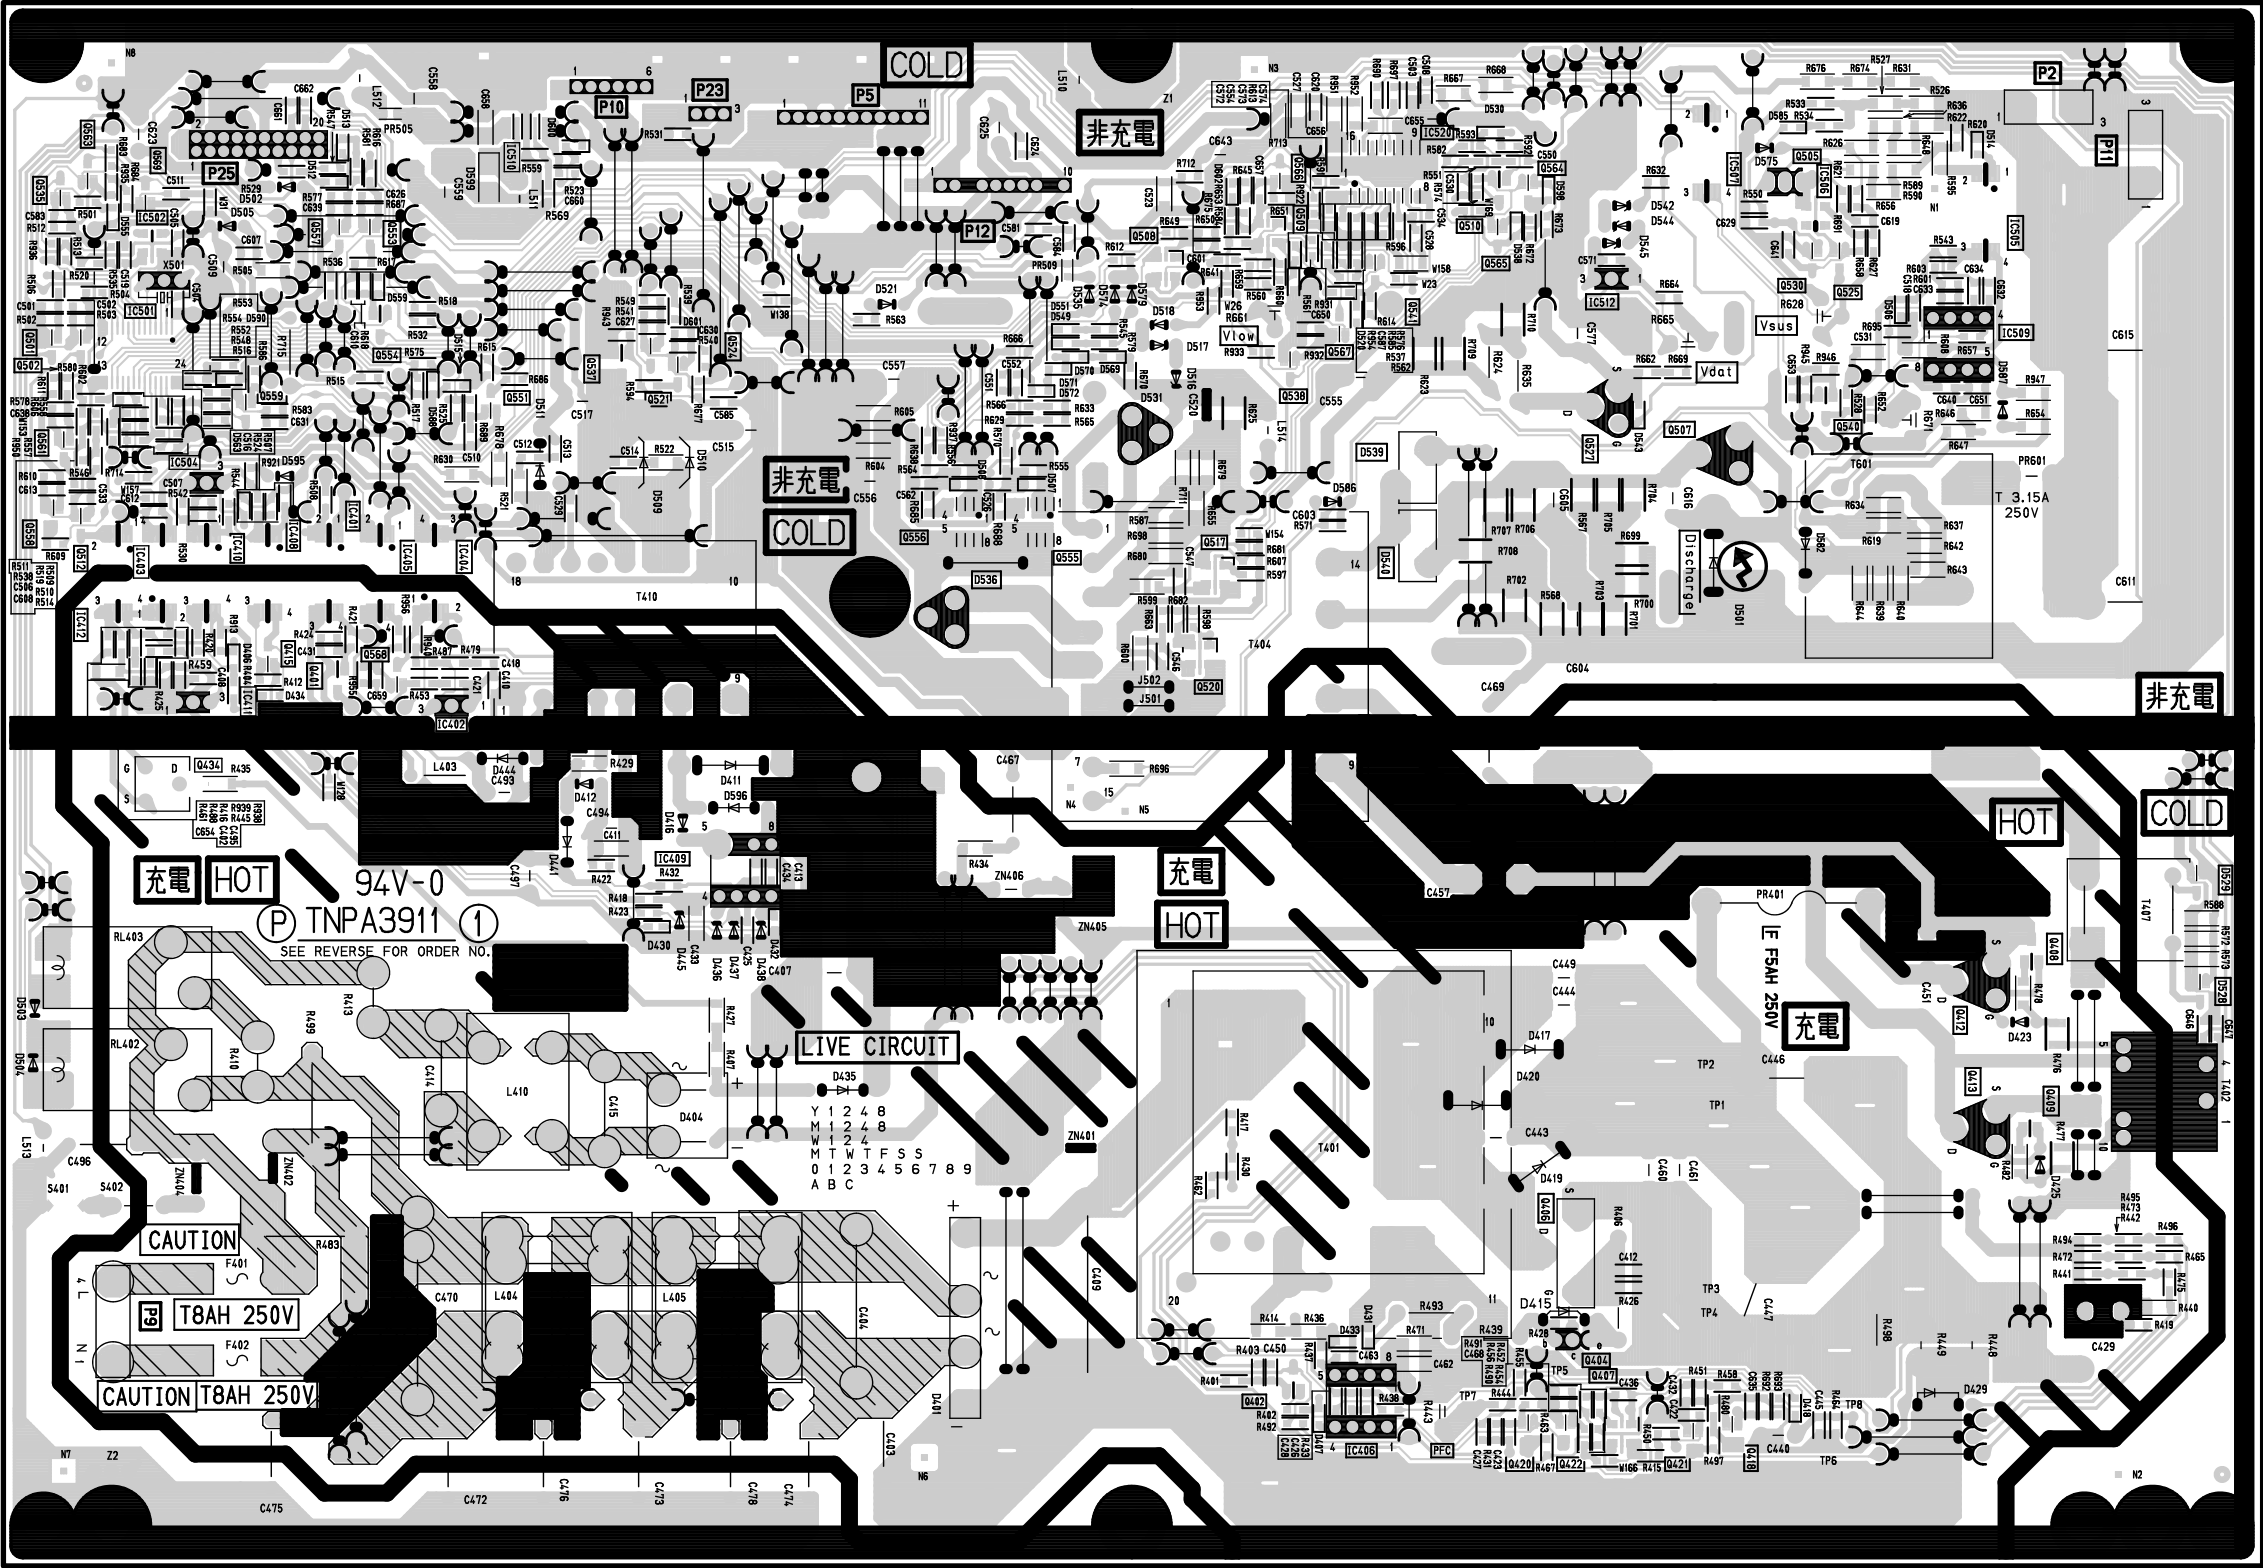

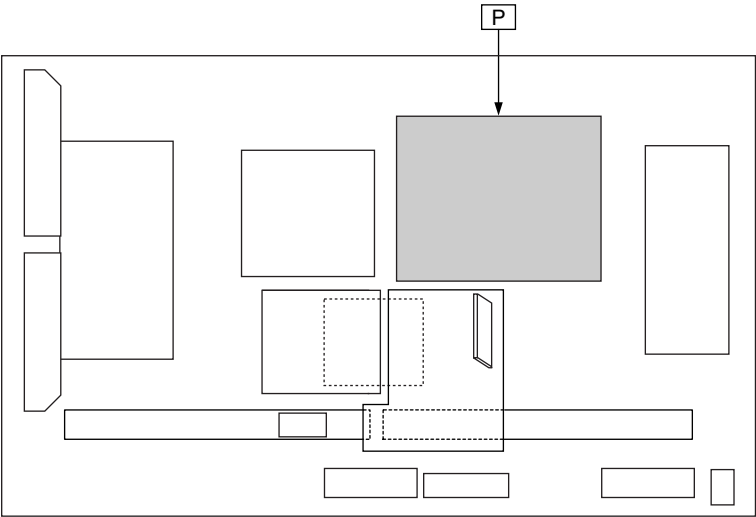



Parts Location

P-BOARD (FOIL SIDE)					
IC		TRANSISTOR			
IC401	B-4	Q401	B-4	Q535	A-5
IC402	C-4	Q402	E-1	Q537	C-5
IC403	B-4	Q404	F-1	Q538	E-5
IC404	C-4	Q406	F-2	Q540	G-5
IC405	C-4	Q407	F-1	Q541	F-5
IC406	F-1	Q408	H-3	Q551	C-5
IC408	B-4	Q409	H-2	Q553	B-5
IC409	C-3	Q412	H-3	Q554	B-5
IC410	B-4	Q413	H-2	Q555	E-4
IC411	B-4	Q415	B-4	Q556	D-4
IC412	A-4	Q418	G-1	Q557	B-5
IC501	B-5	Q420	F-1	Q558	A-4
IC502	B-5	Q421	G-1	Q559	B-5
IC504	B-4	Q422	F-1	Q561	A-5
IC505	H-5	Q434	B-4	Q563	A-6
IC506	G-5	Q501	A-5	Q564	F-6
IC507	G-6	Q502	A-5	Q565	F-5
IC509	H-5	Q505	G-6	Q566	E-6
IC510	C-6	Q507	G-5	Q567	F-5
IC512	F-5	Q508	E-5	Q568	B-4
IC520	F-6	Q509	E-5	Q569	B-6
				VOLUME	
				R443	F-1
				R628	G-5
				R661	E-5
				R665	G-5
				R671	G-4
				Q510	F-5
				Q512	A-4
				Q517	E-4
				Q520	E-4
				Q521	C-5
				Q524	D-5
				Q525	G-5
				Q527	F-5
				Q530	G-5

Parts Location

P-BOARD (COMPONENT SIDE)					
IC		TRANSITOR		VOLUME	
IC402	G-4	Q404	C-2	R443	D-1
IC406	D-1	Q406	D-2	R628	C-5
IC409	F-3	Q412	B-3	R661	D-5
IC411	H-4	Q413	B-2	R665	C-5
IC504	H-4	Q434	H-3	R671	B-5
IC509	B-5	Q505	C-5		
IC512	C-5	Q507	C-5		
		Q527	C-5		

PA-BOARD (FOIL SIDE)
TNPA3761AC

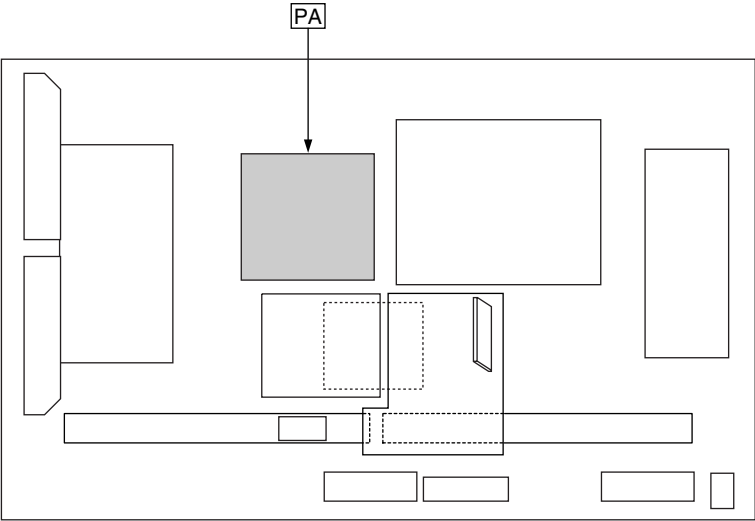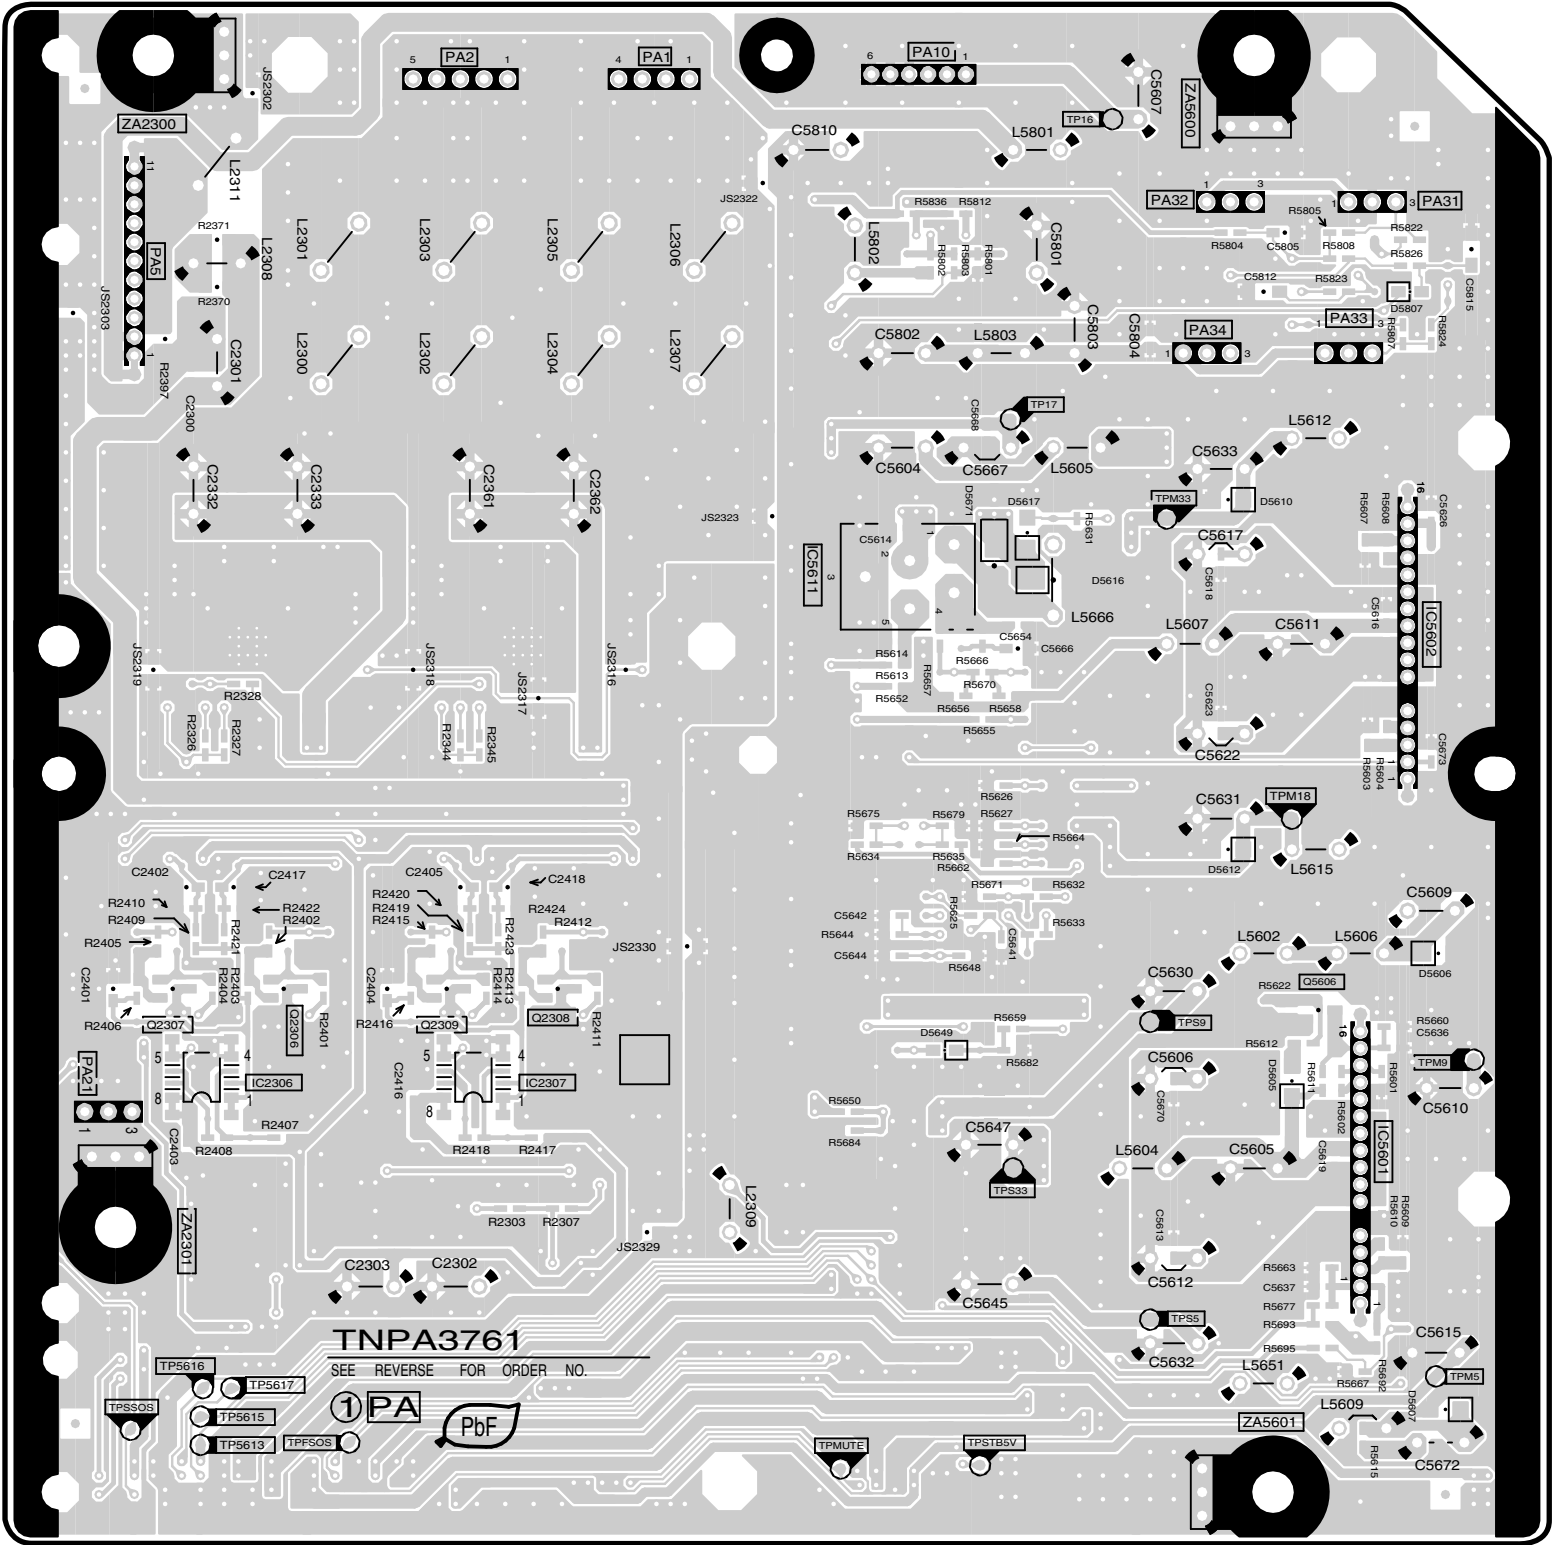

Parts Location

PA-BOARD (FOIL SIDE)					
IC		TRANSISTOR		TP	
IC2306	B-2	Q2306	B-3	TP16	D-6
IC2307	C-2	Q2307	A-2	TP17	D-5
IC5601	E-2	Q2308	C-3	TP5613	B-1
IC5602	F-4	Q2309	B-3	TP5615	B-1
IC5611	D-4	Q5606	E-3	TP5616	A-1
				TP5617	B-1
				TPFSOS	B-1
				TPM5	F-2
				TPM9	F-2
				TPM18	E-3
				TPM33	E-4
				TPMUTE	D-1
				TPS5	E-2
				TPS9	E-3
				TPS33	D-2
				TPSSOS	A-1
				TPSTB5V	D-1

6

5


4

3

2

1

SC-BEARD (COMPONENT SIDE)
TNPA3814

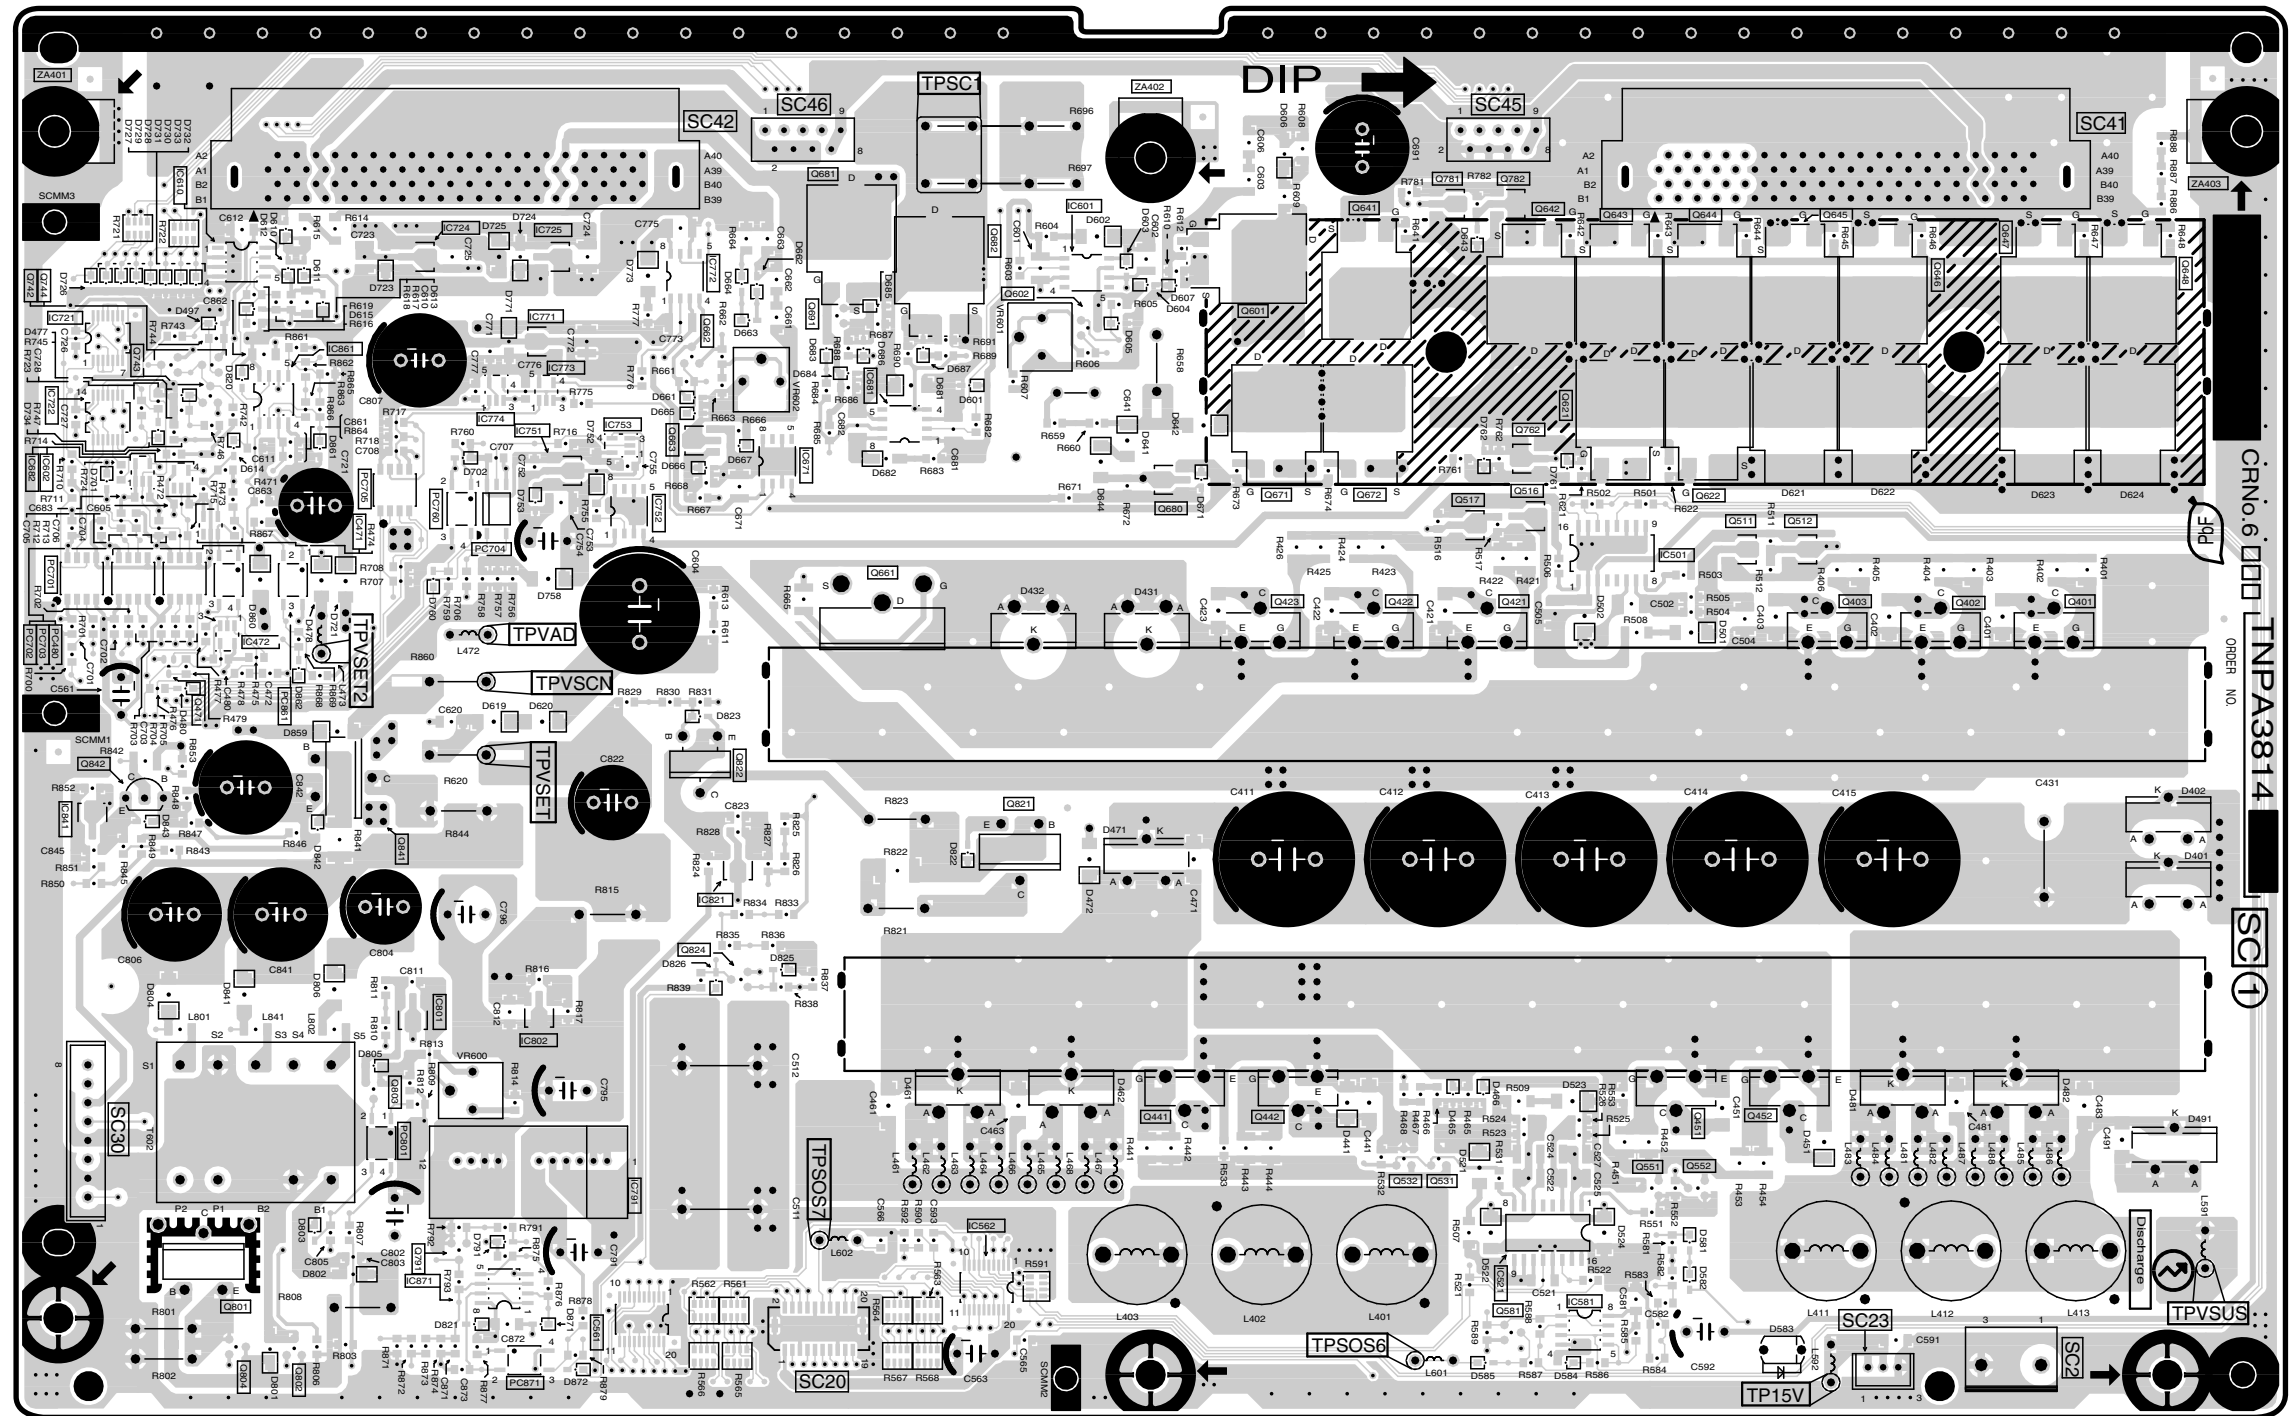

CRN0.6000 INPA3814
ORDER NO. SC1

A

B

C

D


E

F

G

H

I

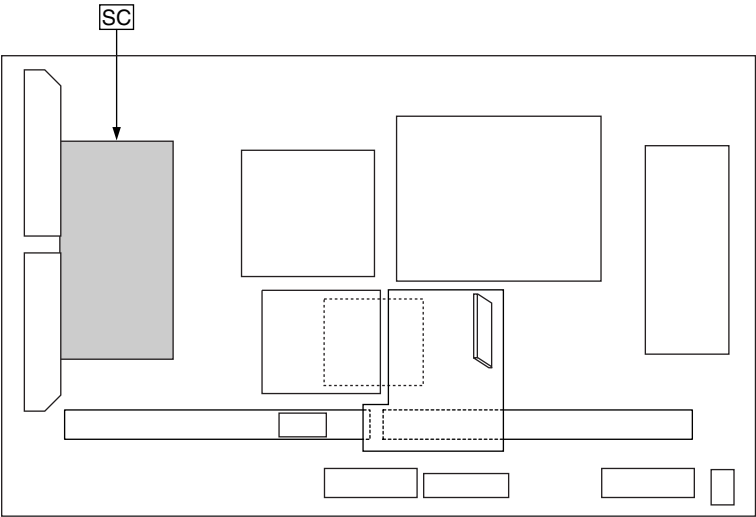

Parts Location


SC-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6401	B-4	TP1	A-1	TP41	D-5
Q6402	B-4	TP2	B-1	TP42	C-5
Q6403	C-4	TP4	B-2	TP43	C-5
Q6421	D-4	TP5	B-2	TP44	B-6
Q6422	D-4	TP6	C-1	TP45	C-5
Q6423	D-4	TP7	C-1	TP46	F-5
Q6441	E-2	TP8	B-2	TP47	F-5
Q6442	D-2	TP9	B-2	TP48	F-6
Q6451	C-2	TP10	F-2	TP49	F-6
Q6452	C-2	TP11	F-2	TP50	H-6
Q6661	F-4	TP12	G-1	TP51	G-6
Q6801	H-1	TP13	G-1	TP52	E-1
Q6821	E-3	TP14	E-2	TP53	G-4
Q6822	F-3	TP15	F-2	TP54	C-6
Q6841	H-3	TP16	G-1	TP55	C-6
Q6842	H-3	TP17	G-1	TP56	C-6
		TP18	F-2	TP57	B-6
		TP19	F-1	TP58	B-6
		TP20	F-2	TP59	G-6
		TP21	E-1	TP60	G-6
		TP22	F-2	TP61	G-6
		TP23	F-1	TP62	G-6
		TP24	F-1	TP63	G-6
		TP25	F-1	TP64	F-3
		TP26	E-1	VOLUME	
		TP27	F-1	VR6600	G-2
		TP28	H-2	VR6601	E-5
		TP29	H-5	VR6602	F-5
		TP30	A-5		
		TP31	H-4		
		TP32	E-5		
		TP33	B-3		
		TP34	E-1		
		TP35	E-3		
		TP38	F-1		
		TP39	E-1		
		TP40	D-5		

Parts Location


SC-BOARD (COMPONENT SIDE)							
IC		PHOTO COUPLER				TP	
IC6471	B-4	PC6480	A-4	Q6641	F-5	TP15V	G-1
IC6472	B-4	PC6701	A-4	Q6642	F-5	TPSC1	D-6
IC6501	G-4	PC6702	A-4	Q6643	F-5	TPSOS6	F-1
IC6521	F-2	PC6703	A-4	Q6644	G-5	TPSOS7	D-2
IC6561	C-1	PC6704	C-4	Q6645	G-5	TPVAD	C-4
IC6562	D-2	PC6705	B-4	Q6646	G-5	TPVSCN	C-4
IC6581	F-1	PC6760	C-4	Q6647	H-5	TPVSET	C-3
IC6601	E-5	PC6801	B-2	Q6648	H-5	TPVSET2	B-4
IC6602	A-4	PC6861	B-3	Q6661	D-4	TPVSUS	H-1
IC6610	B-5	PC6871	C-1	Q6662	C-5		
IC6671	D-4	TRANSISTOR		Q6663	C-4	VOLUME	
IC6681	D-5	Q6401	H-4	Q6671	E-4	VR6600	C-2
IC6682	A-4	Q6402	H-4	Q6672	F-4	VR6601	D-4
IC6721	A-5	Q6403	G-4	Q6680	E-4	VR6602	D-5
IC6722	A-4	Q6421	F-4	Q6681	E-4		
IC6724	C-5	Q6422	F-4	Q6682	D-5		
IC6725	C-5	Q6423	E-4	Q6691	D-5		
IC6751	C-4	Q6441	E-2	Q6742	A-5		
IC6752	C-4	Q6442	E-2	Q6743	B-5		
IC6753	C-4	Q6451	G-2	Q6744	A-5		
IC6771	C-5	Q6452	G-2	Q6762	F-4		
IC6772	C-5	Q6471	B-3	Q6781	F-5		
IC6773	C-5	Q6511	G-4	Q6782	F-5		
IC6774	C-4	Q6512	G-4	Q6791	B-2		
IC6791	C-2	Q6516	F-4	Q6801	B-1		
IC6801	C-2	Q6517	F-4	Q6802	B-1		
IC6802	C-2	Q6531	F-2	Q6803	B-2		
IC6821	C-3	Q6532	F-2	Q6804	B-1		
IC6841	A-3	Q6551	F-2	Q6821	D-3		
IC6861	B-5	Q6552	G-2	Q6822	D-3		
IC6871	B-2	Q6581	F-1	Q6824	C-3		
		Q6601	E-5	Q6841	B-3		
		Q6602	D-5	Q6842	A-3		
		Q6621	F-4				
		Q6622	G-4				

Parts Location


SD-BOARD	
IC	
IC6951	G-2
IC6952	F-2
IC6953	E-2
IC6954	D-1
IC6955	C-2
IC6956	B-2

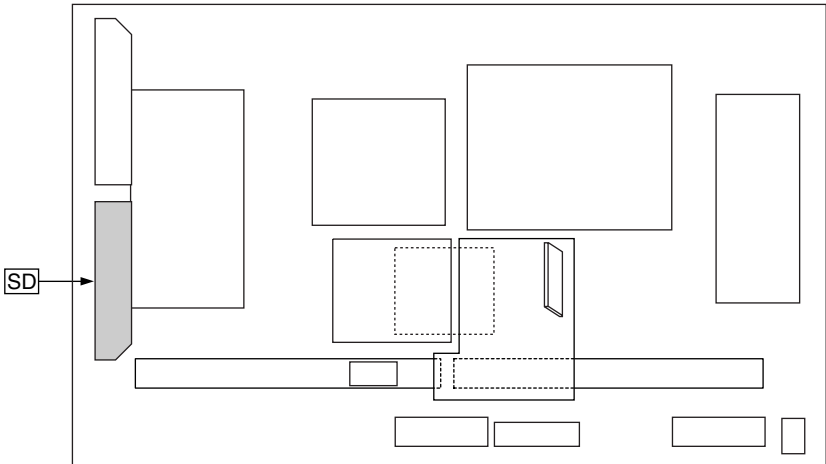

SD-BOARD (FOIL SIDE)
TNPA3819

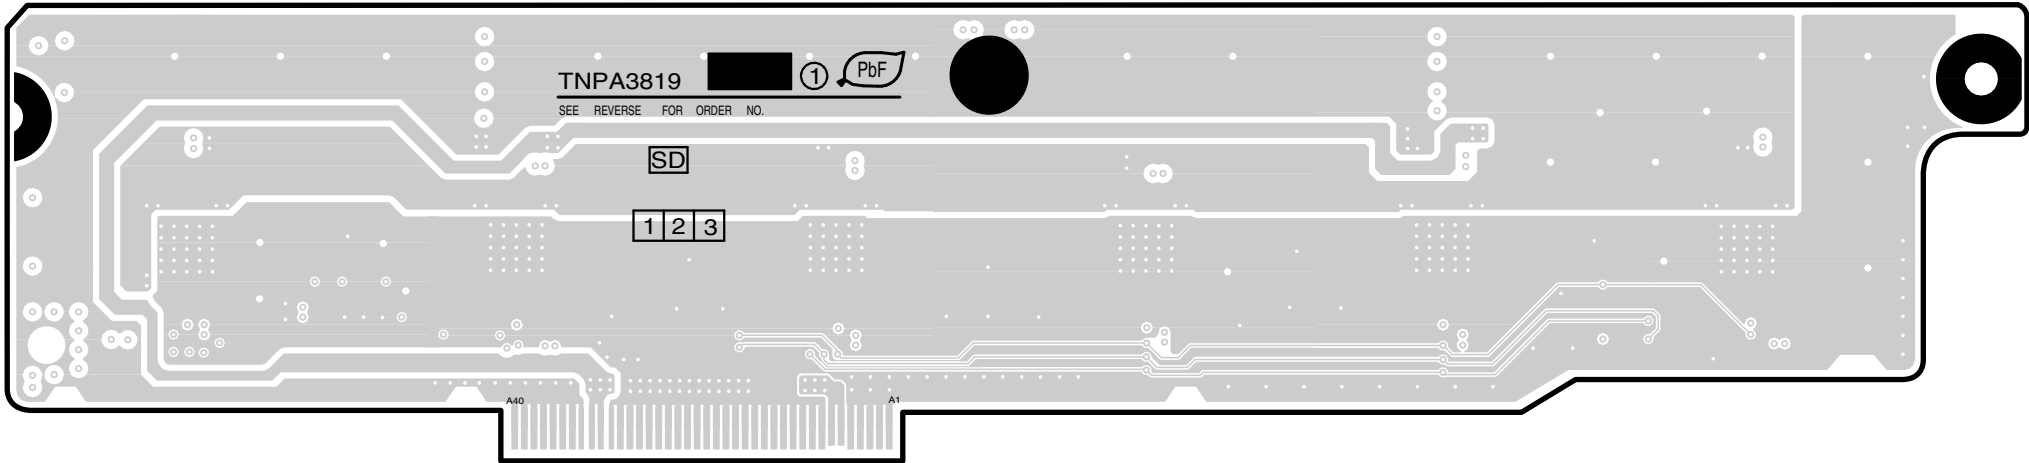


SD-BOARD (COMPONENT SIDE)
TNPA3819

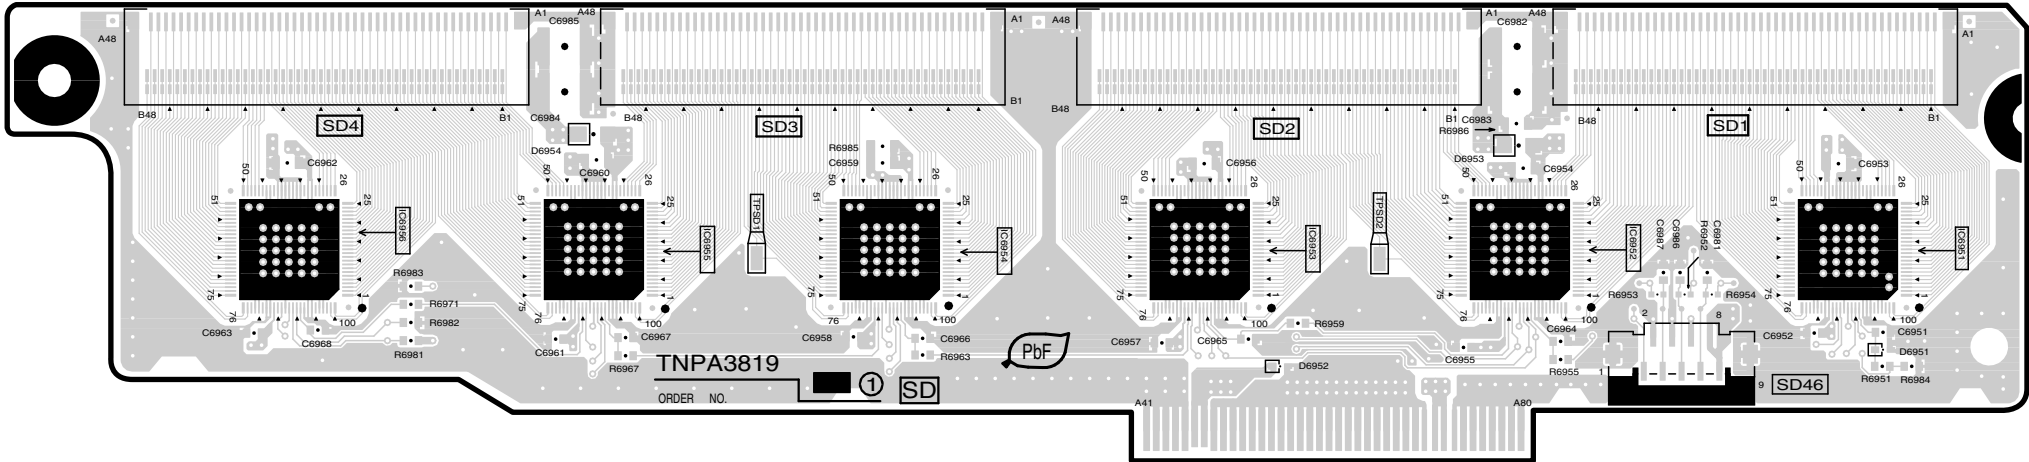


Parts Location

SS-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR		Q		TP	
IC6131	B-3	Q6001	A-3	Q6111	G-2	TP15V	B-2
IC6151	E-2	Q6002	B-3	Q6112	G-2	TPSS1	H-4
IC6191	H-3	Q6003	B-3	Q6141	C-3	TPVDA	A-2
IC6211	F-2	Q6021	C-3	Q6142	C-3	TPVe	F-2
IC6221	F-2	Q6022	C-3	Q6146	C-2	TPVSUS	A-2
IC6241	H-2	Q6023	D-3	Q6147	C-3	VOLUME	
IC6251	I-3	Q6041	F-3	Q6171	F-3		
		Q6042	F-3	Q6172	F-3	VR6000	F-2
		Q6051	E-3	Q6181	E-3		
		Q6052	E-3	Q6182	F-3		
		Q6101	H-3	Q6221	F-2		
		Q6102	H-3	Q6222	F-1		
		Q6103	H-2	Q6251	H-3		
		Q6104	G-3				
		Q6105	G-3				
		Q6106	G-2				

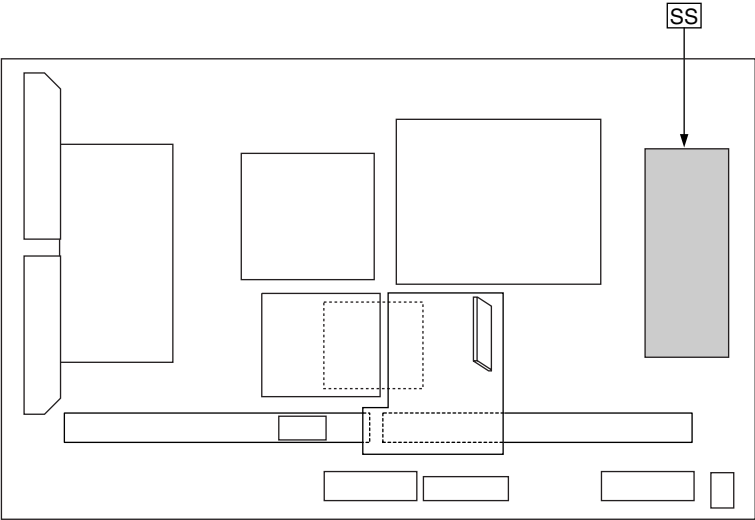


SS-BOARD (COMPONENT SIDE)
TNPA3815

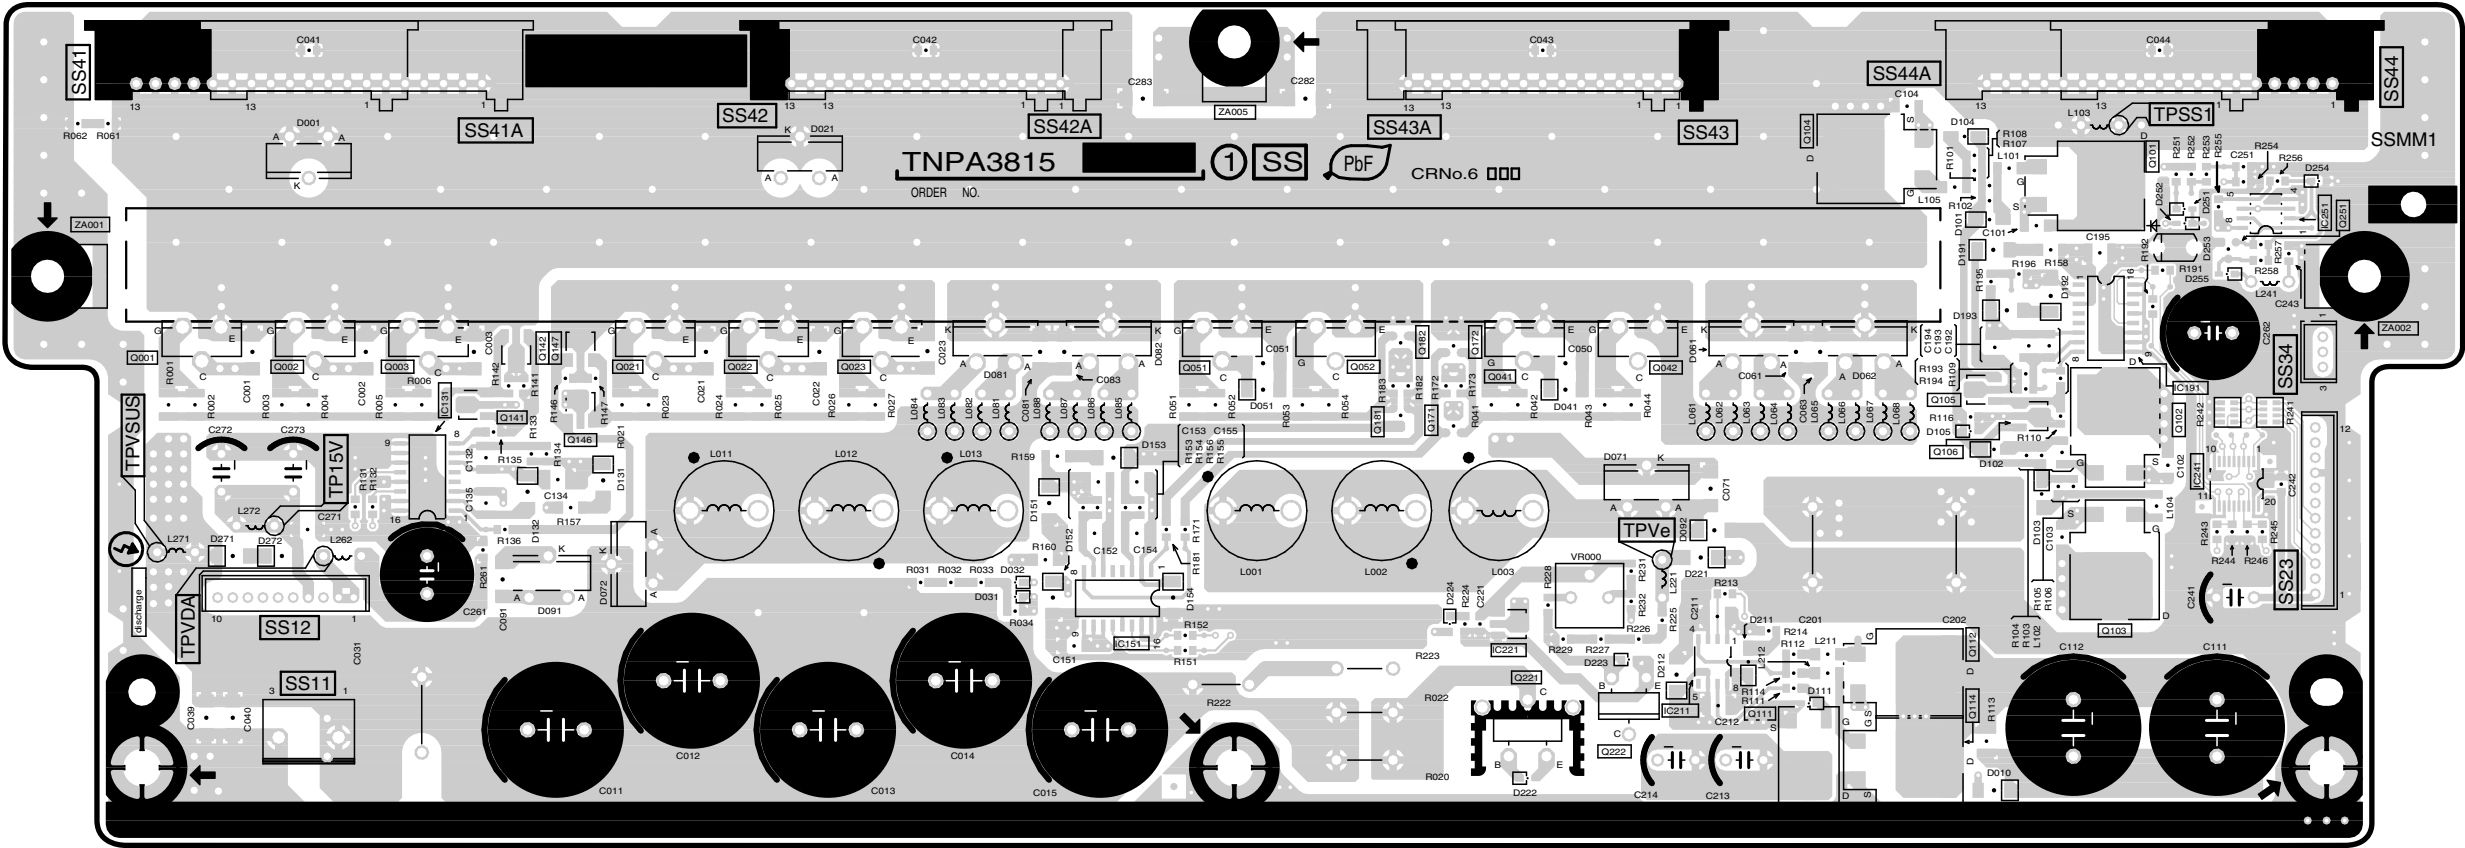


Parts Location

SS-BOARD (FOIL SIDE)							
TRANSISTOR		TP				VOLUME	
Q6001	H-3	TP1	H-1	TP16	B-2	VR6000	D-2
Q6002	H-3	TP2	H-2	TP17	B-2		
Q6003	H-3	TP3	H-2	TP18	B-2		
Q6021	G-3	TP4	H-2	TP19	B-2		
Q6022	F-3	TP5	H-2	TP20	B-2		
Q6023	F-3	TP6	H-2	TP21	B-2		
Q6041	D-3	TP7	H-2	TP22	B-2		
Q6042	D-3	TP8	H-2	TP23	B-2		
Q6051	E-3	TP9	H-2	TP24	I-3		
Q6052	E-3	TP10	G-2	TP25	H-3		
Q6221	D-1	TP11	G-2	TP26	F-3		
Q6222	D-2	TP12	B-3	TP27	F-3		
		TP13	B-2	TP28	D-3		
		TP14	B-2	TP29	D-3		
		TP15	A-2	TP30	B-3		
				TP31	A-3		
				TP32	C-1		

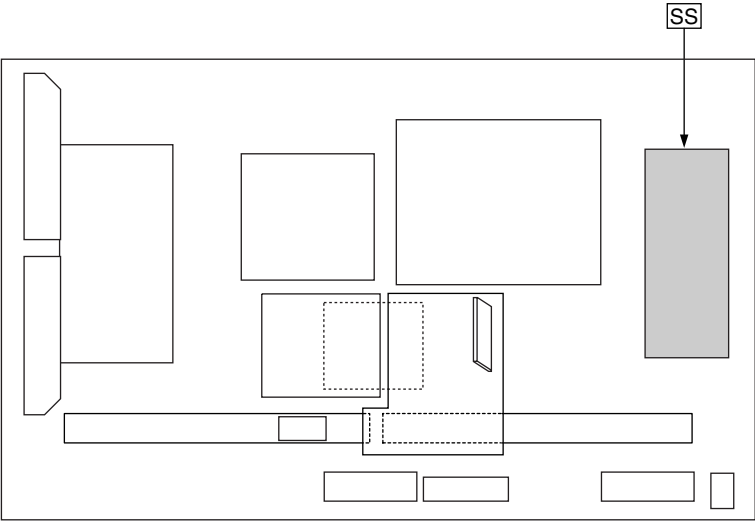


SS-BOARD (FOIL SIDE)
TNPA3815

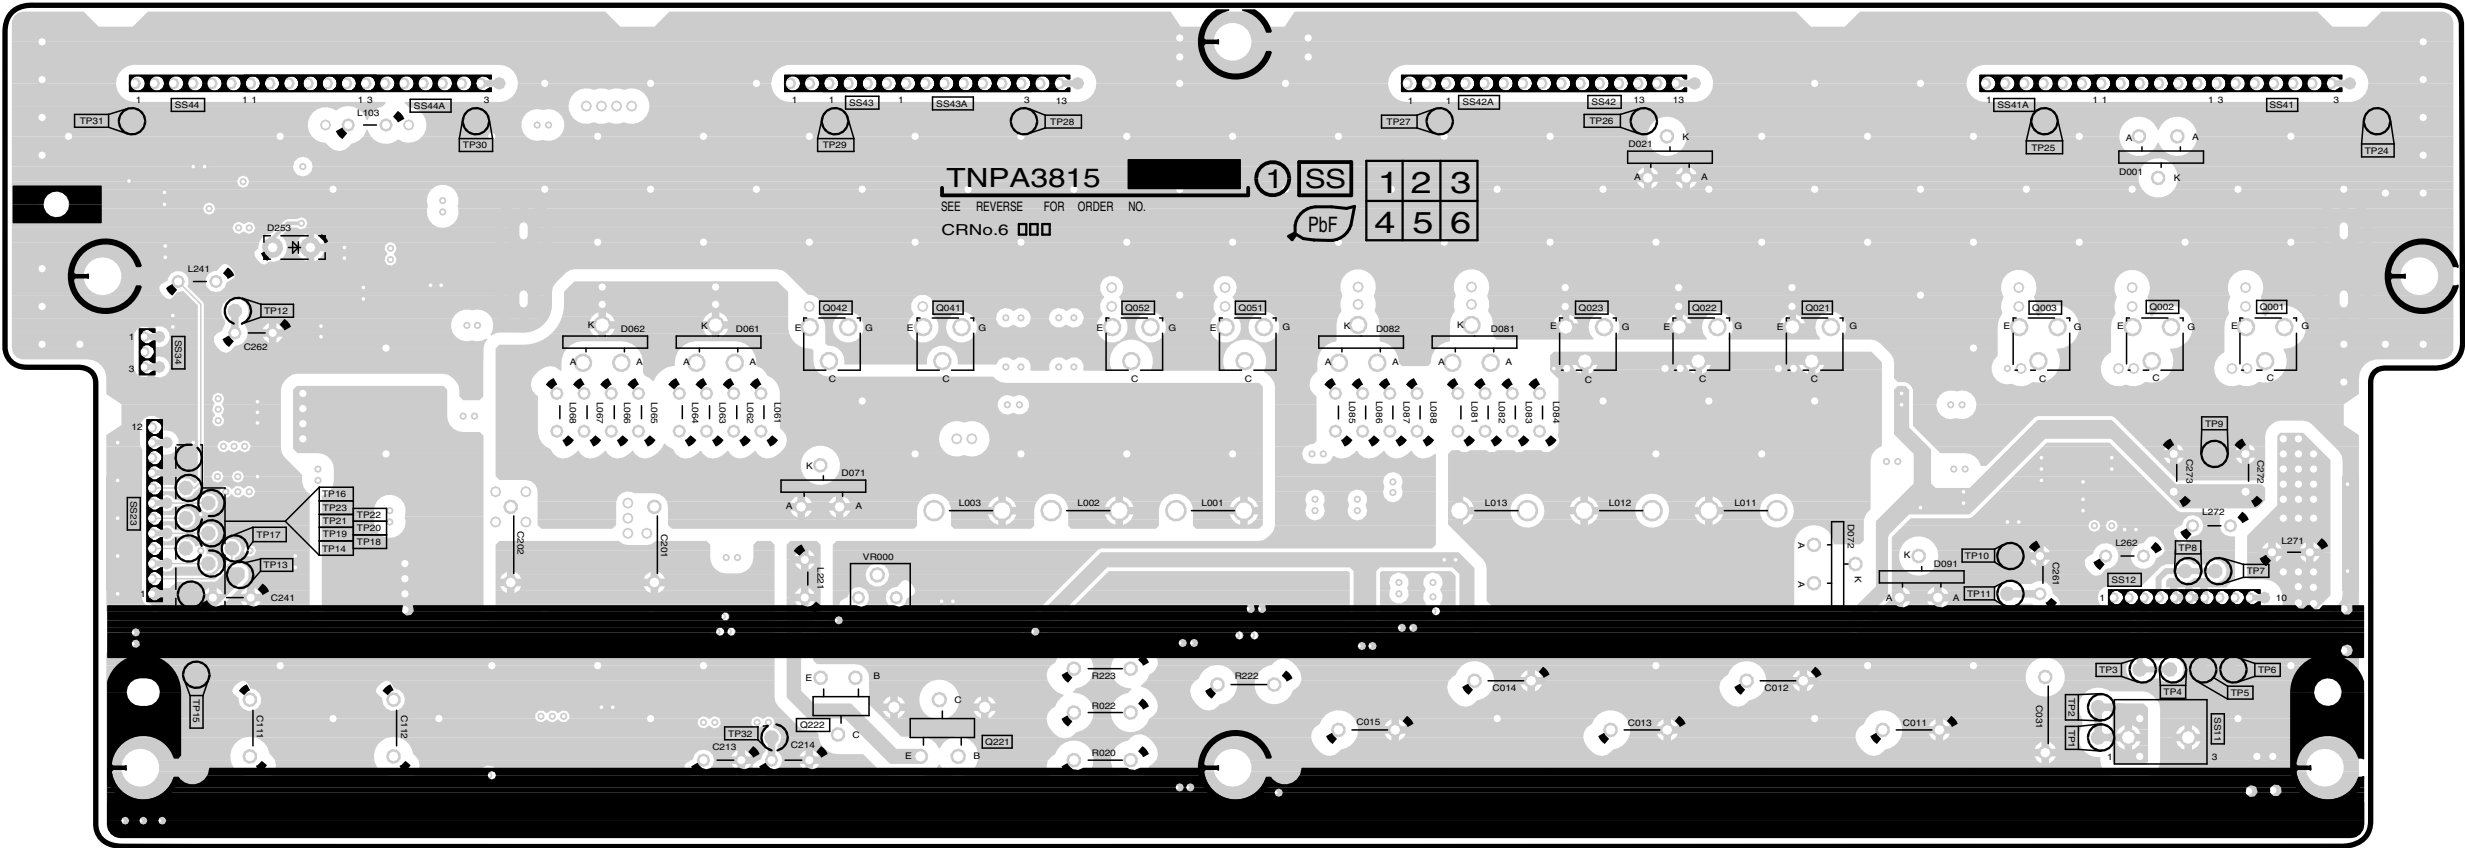


Parts Location


SU-BOARD	
IC	
IC6901	G-2
IC6902	F-2
IC6903	E-2
IC6904	D-1
IC6905	C-2
IC6906	B-2

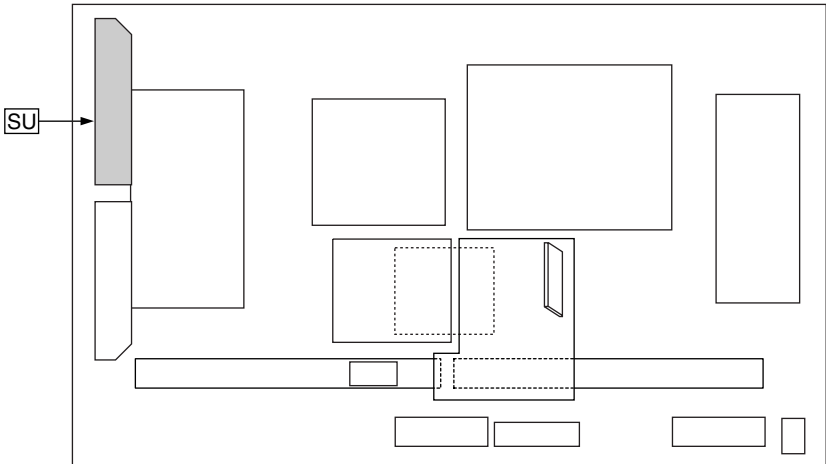


SU-BOARD (FOIL SIDE)
TNPA3818

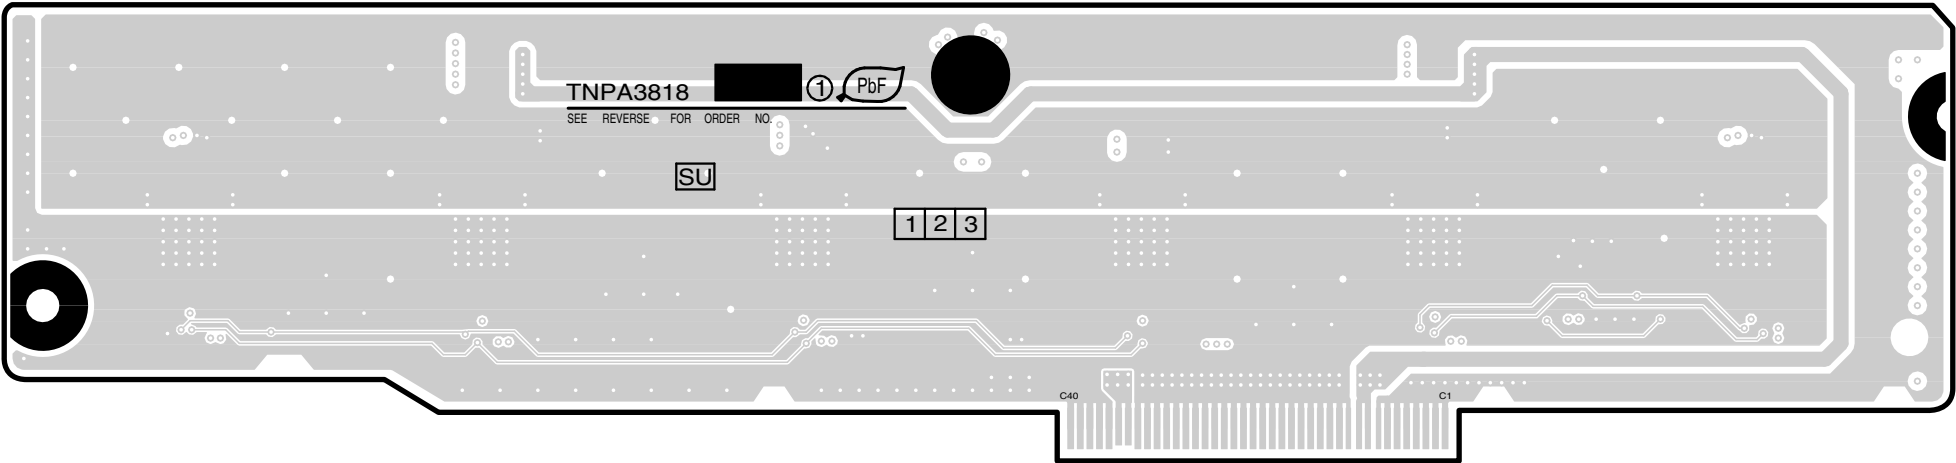



SU-BOARD (COMPONENT SIDE)
TNPA3818

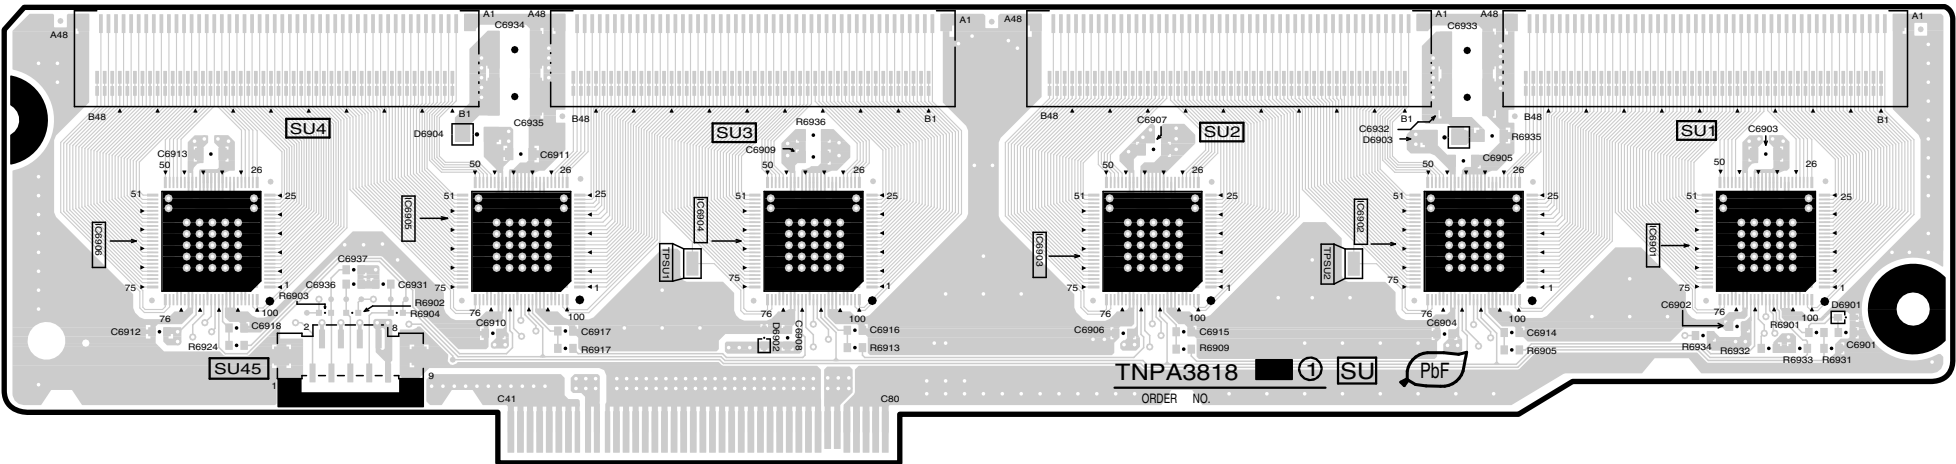

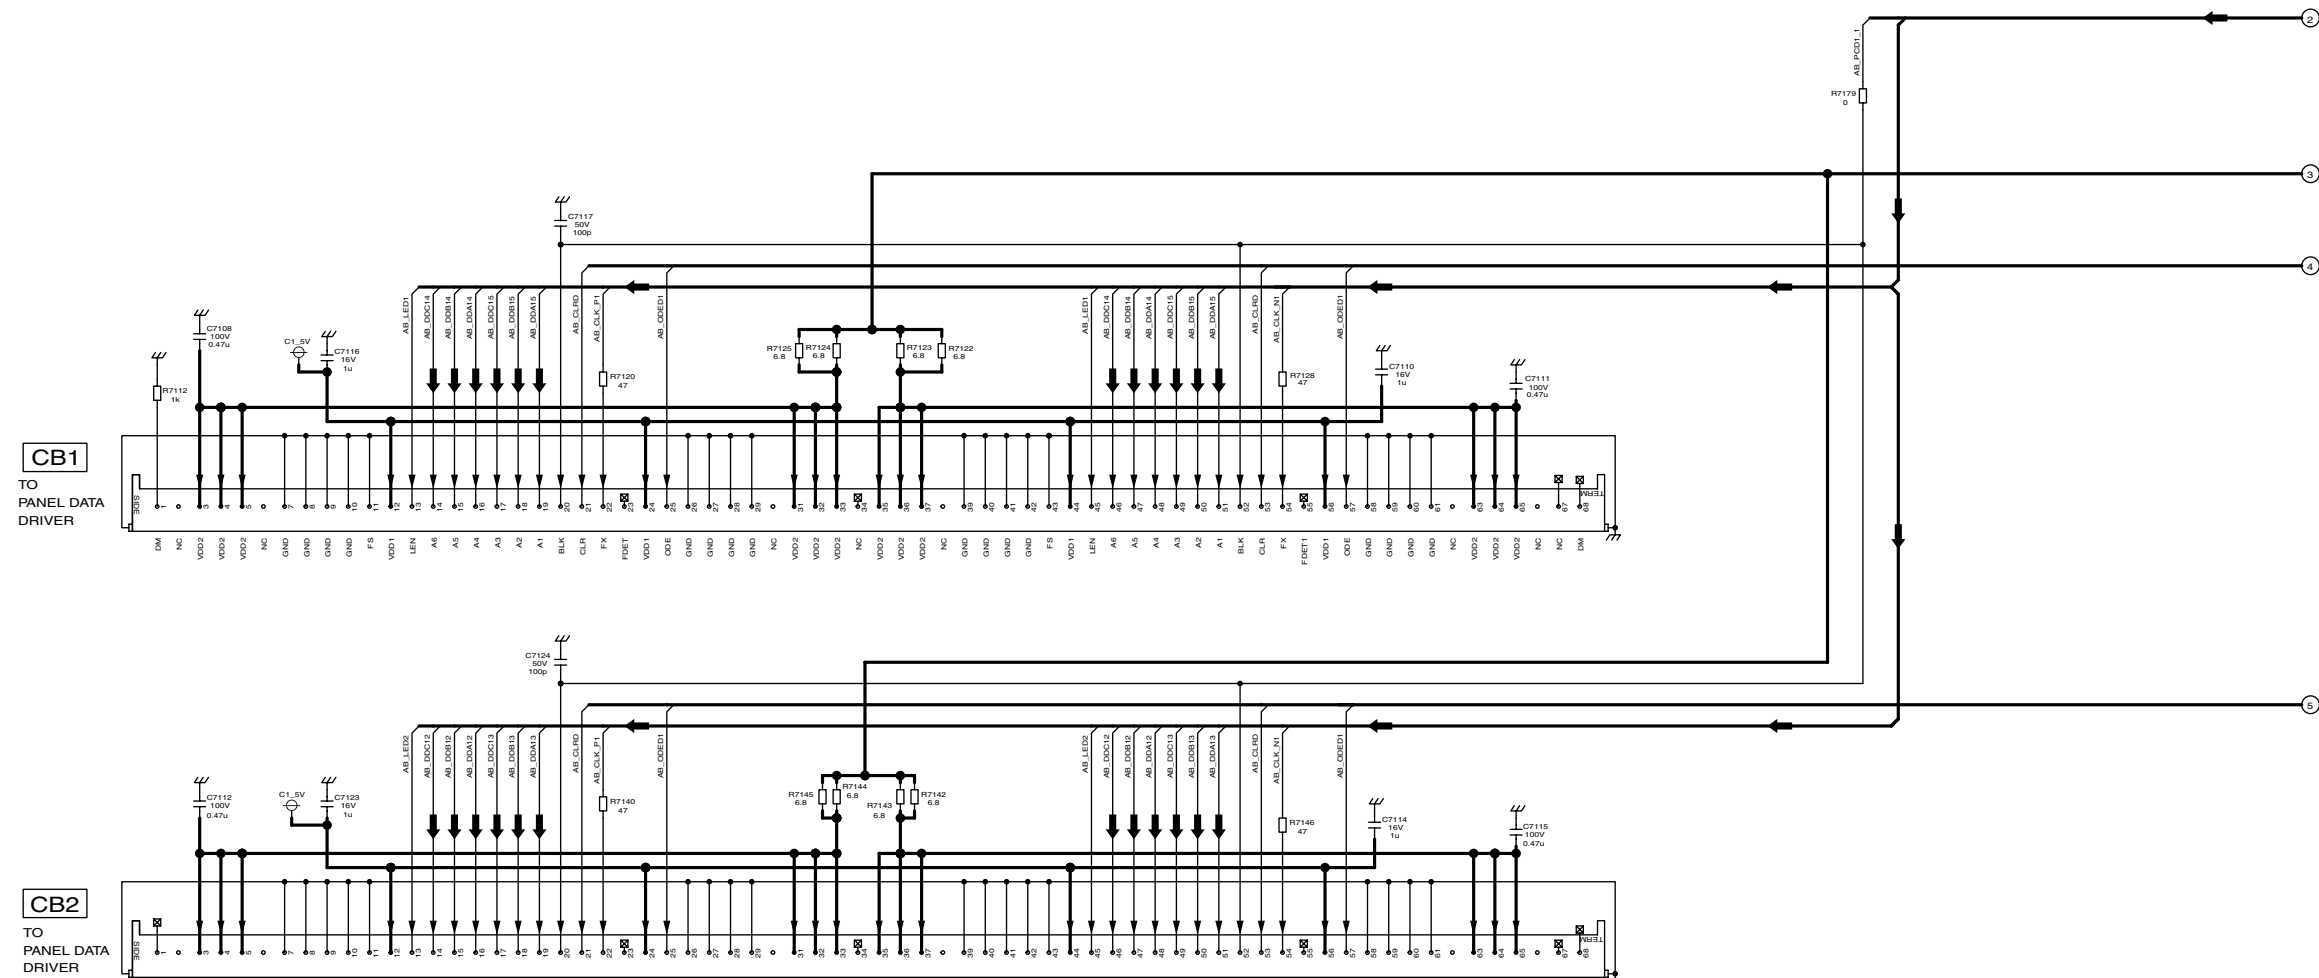


! C1-BOARD TNPA3812 (2/2)

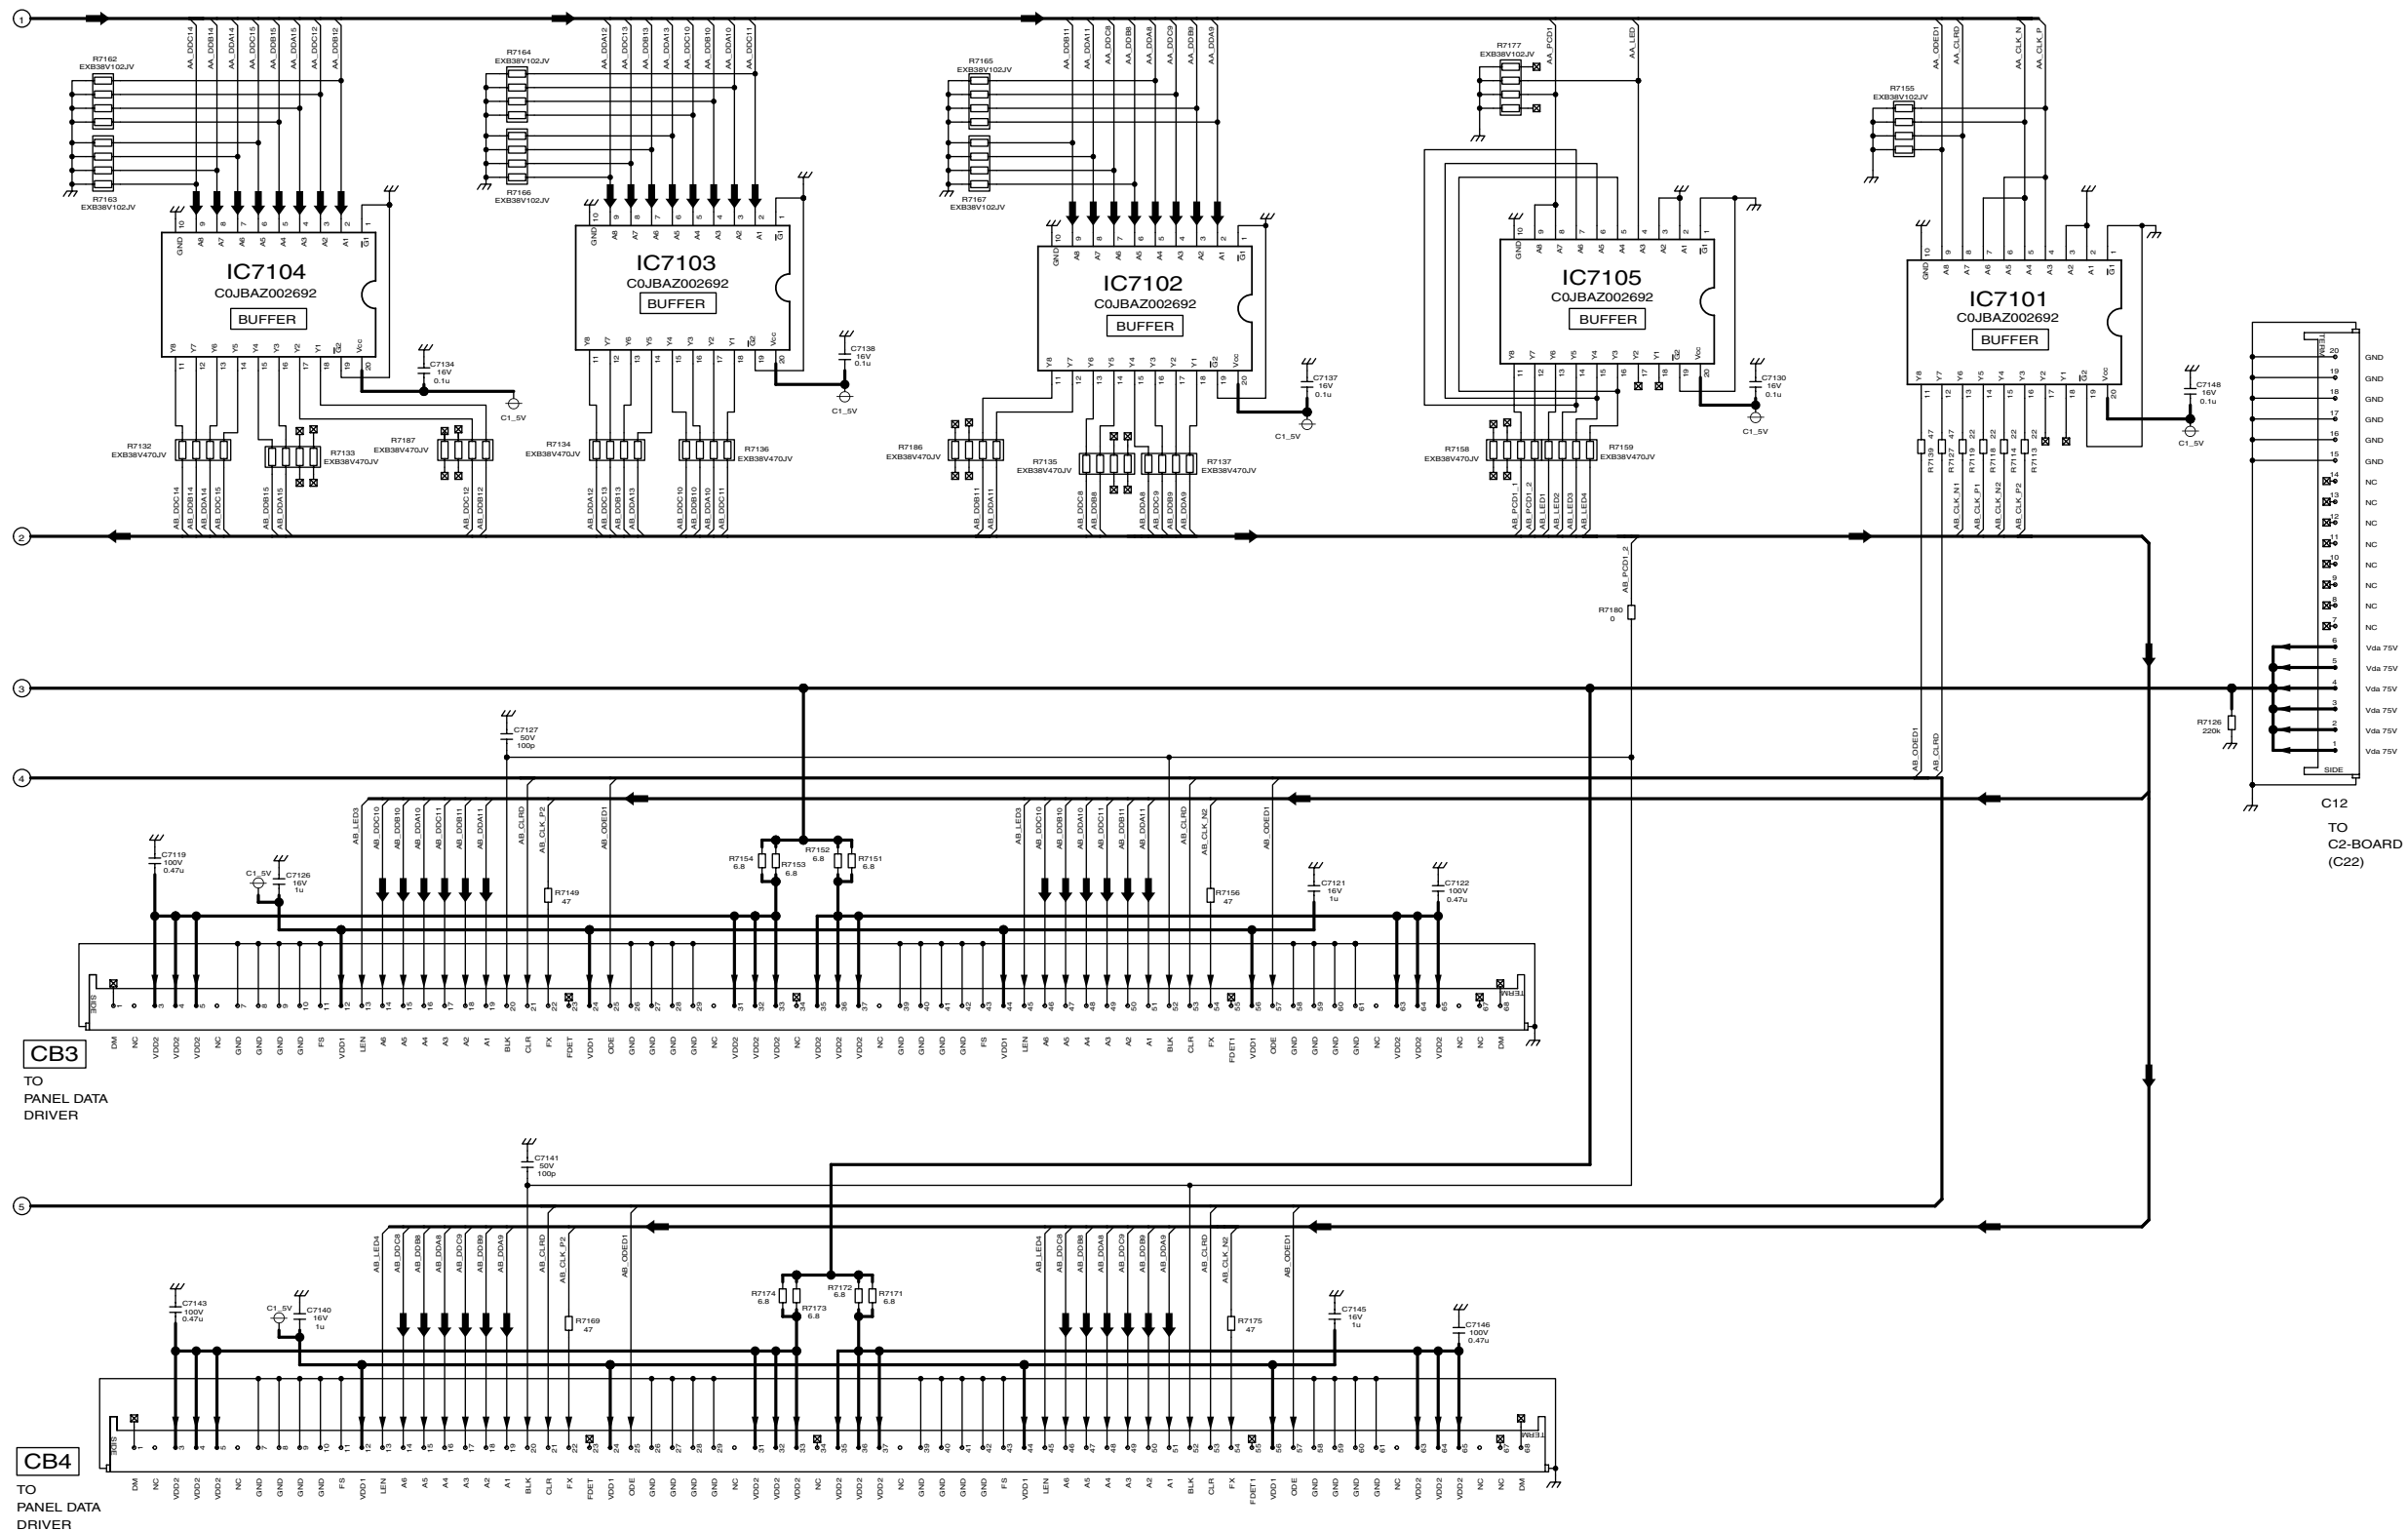

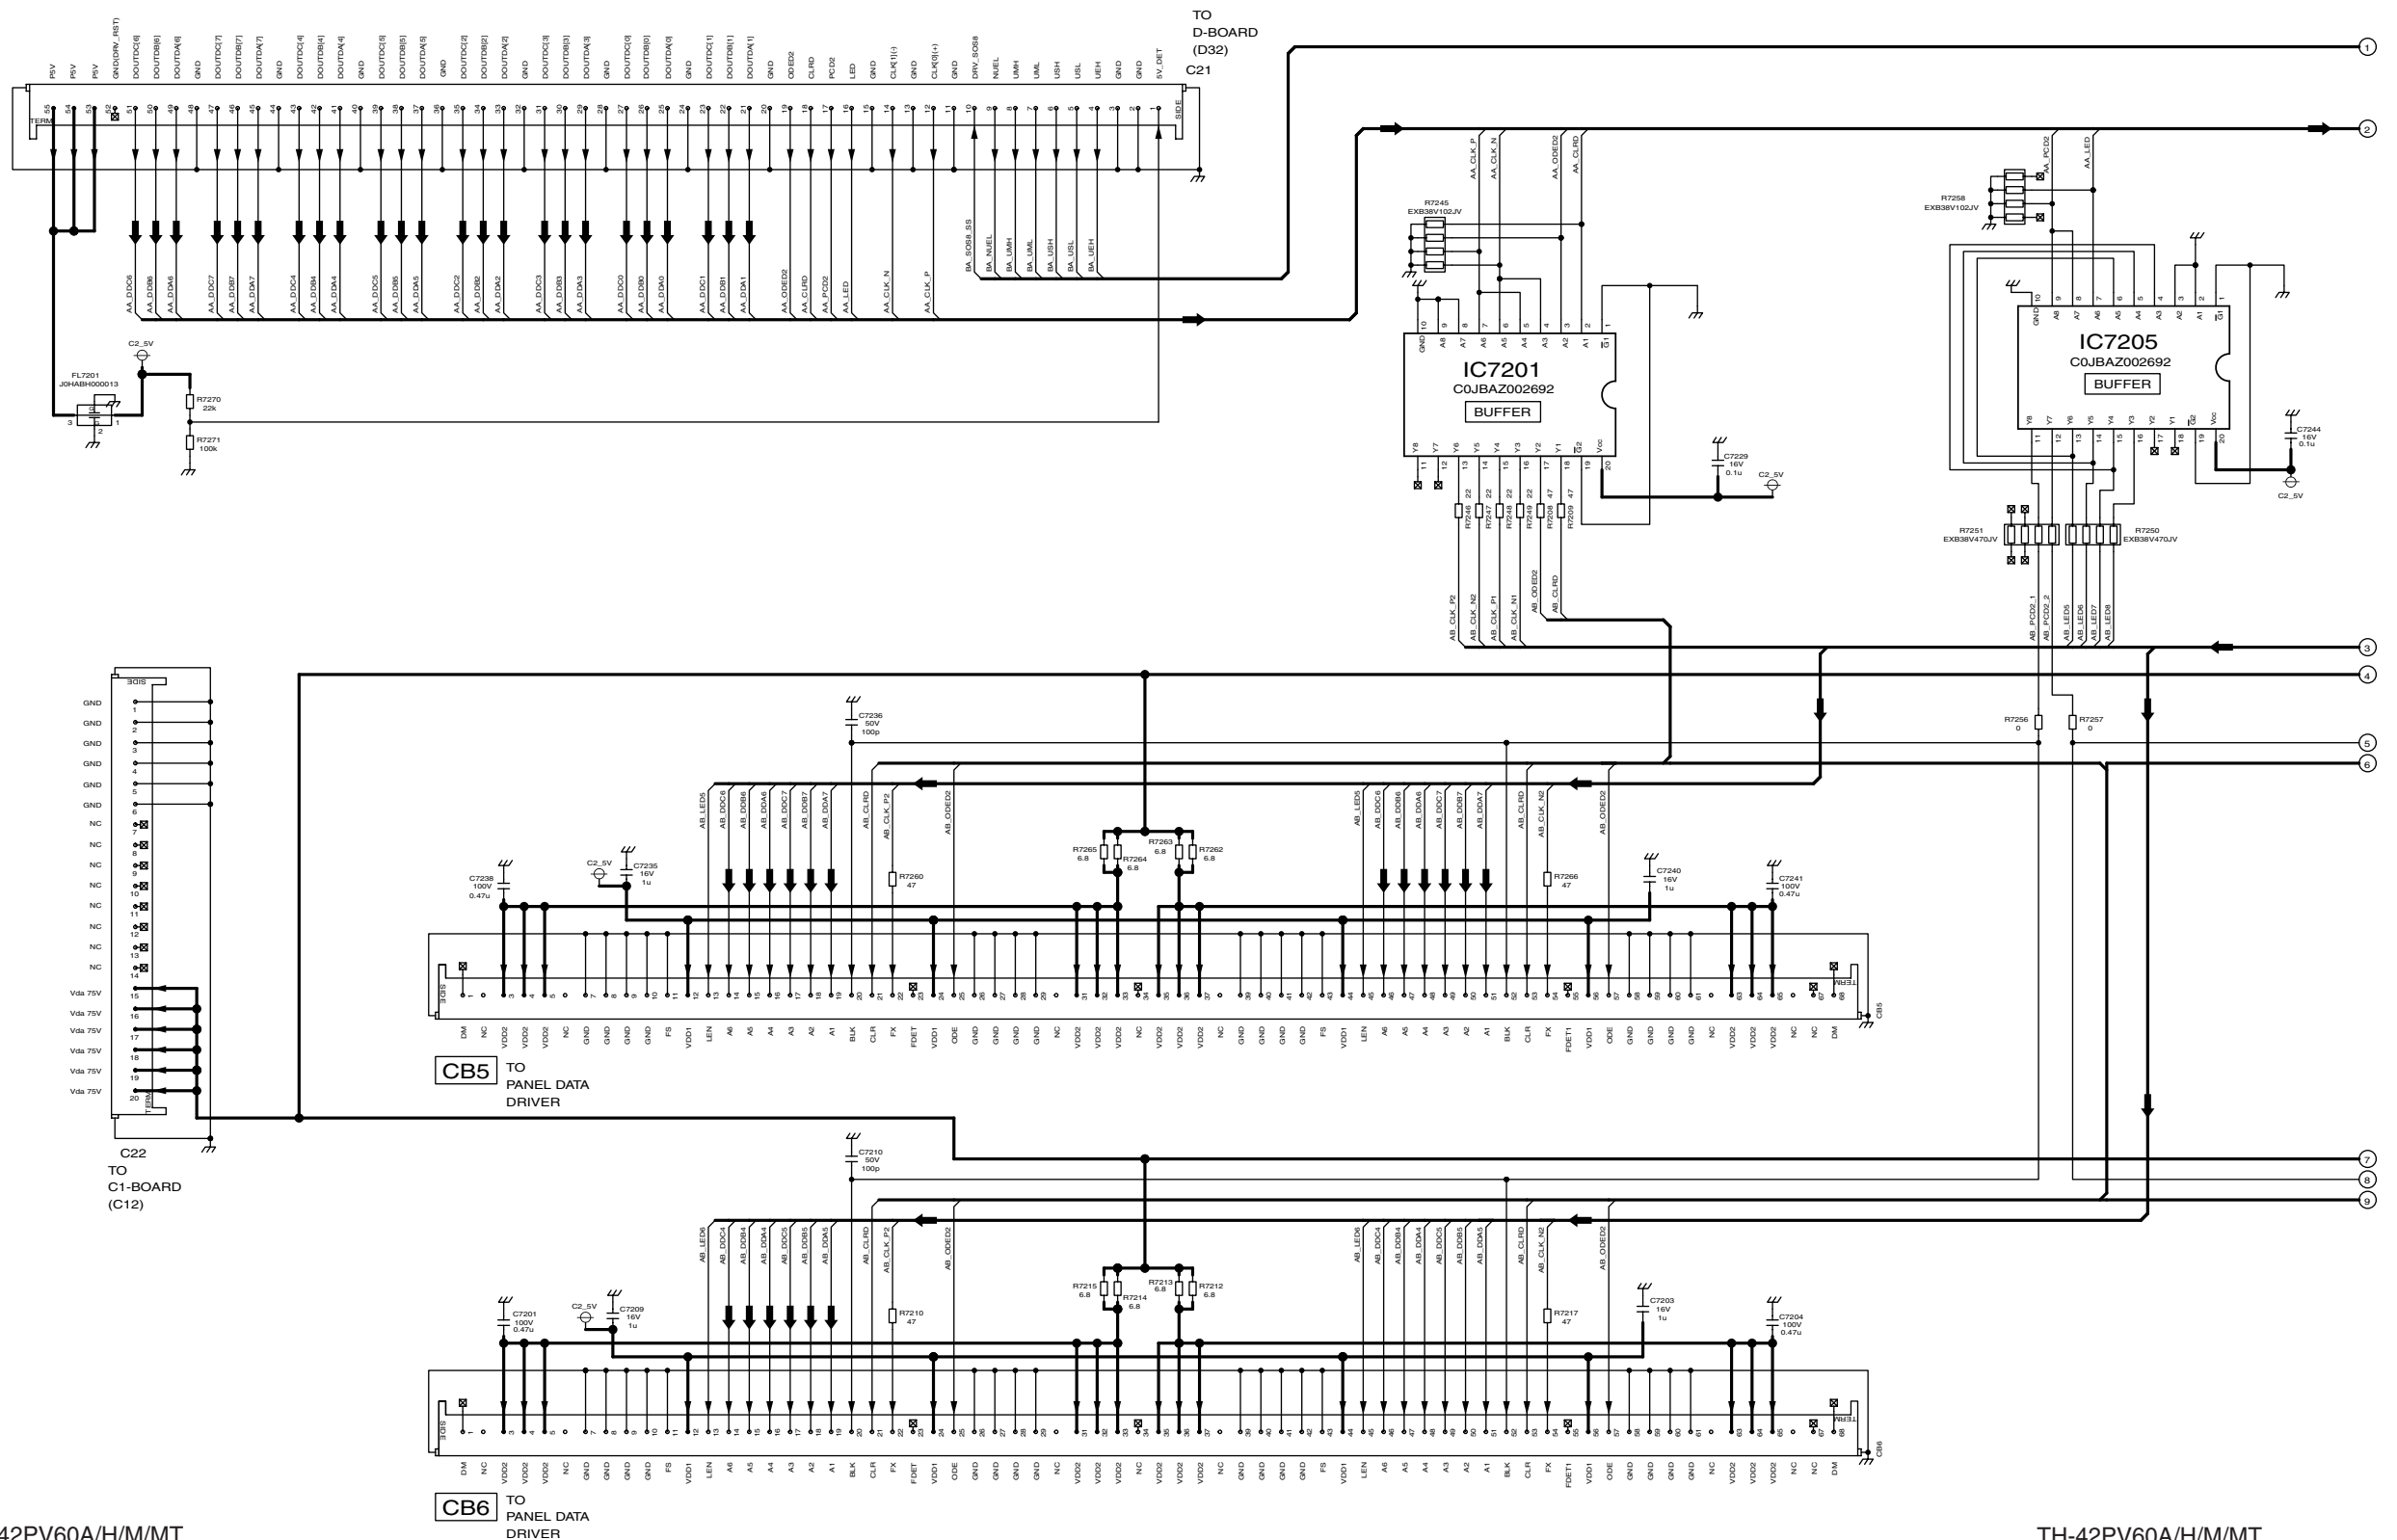



9






TH-42PV60A/H/M/MT
D-Board (2 of 6) Schematic Diagram

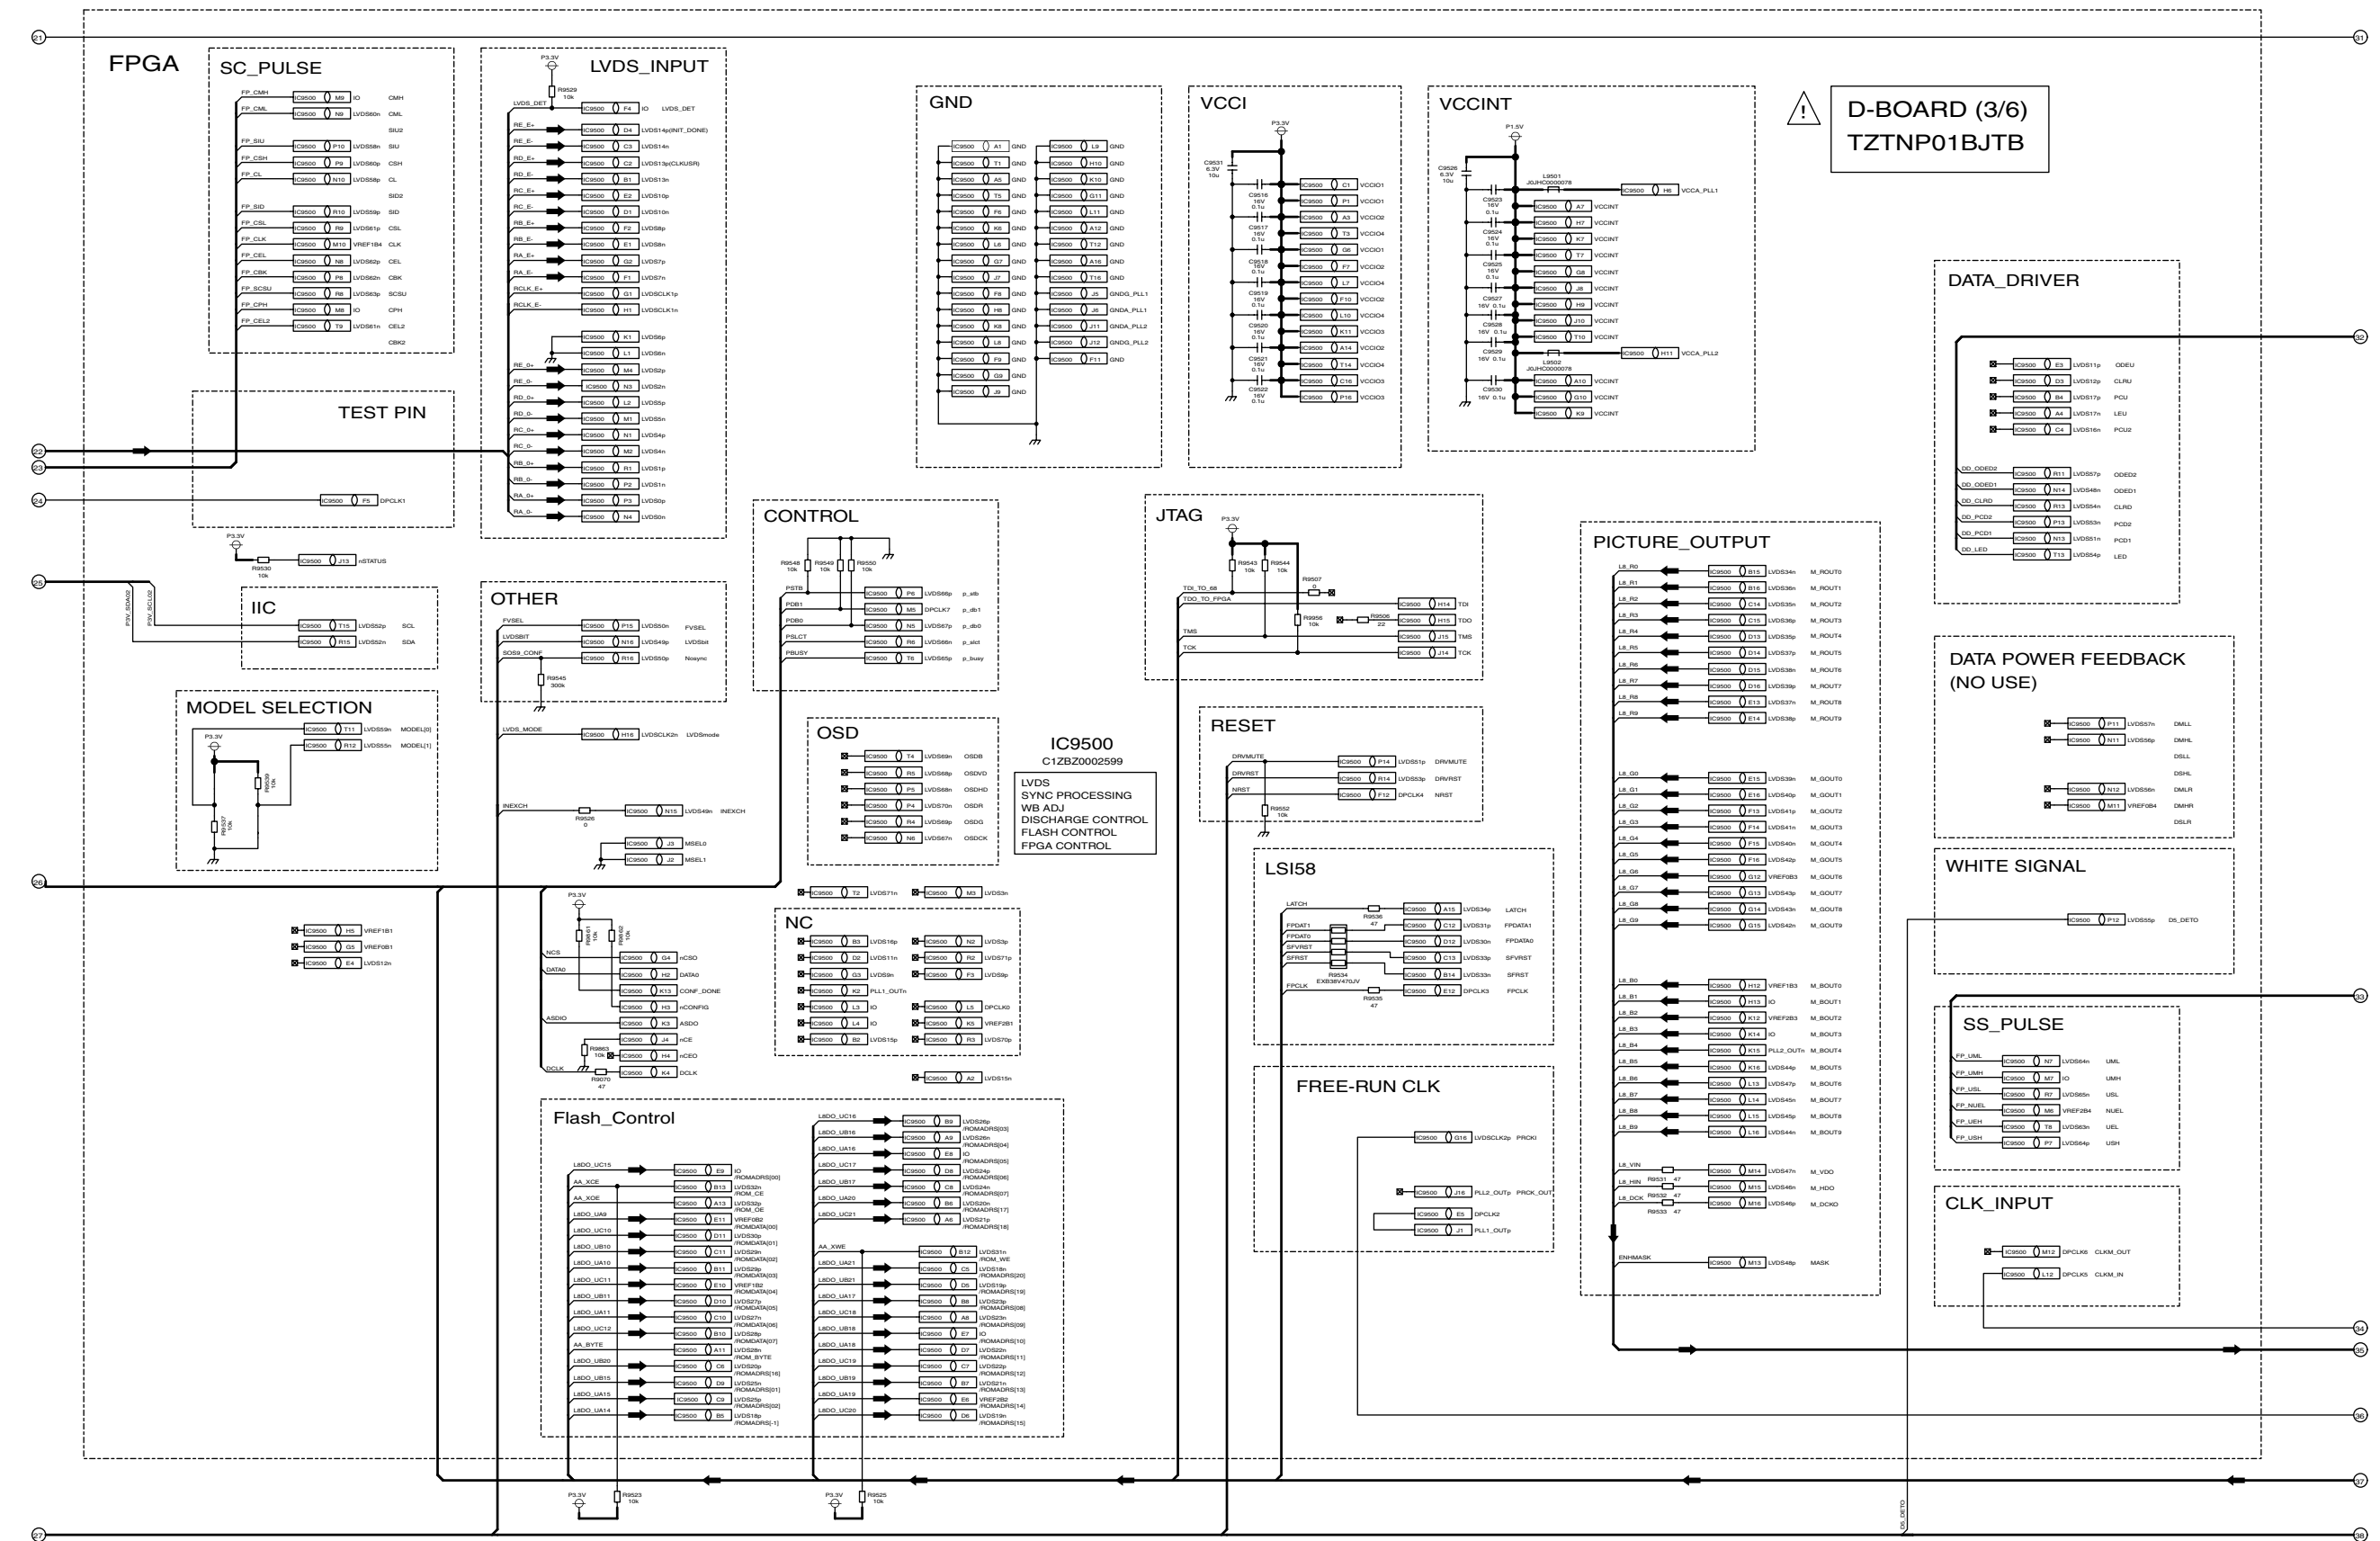


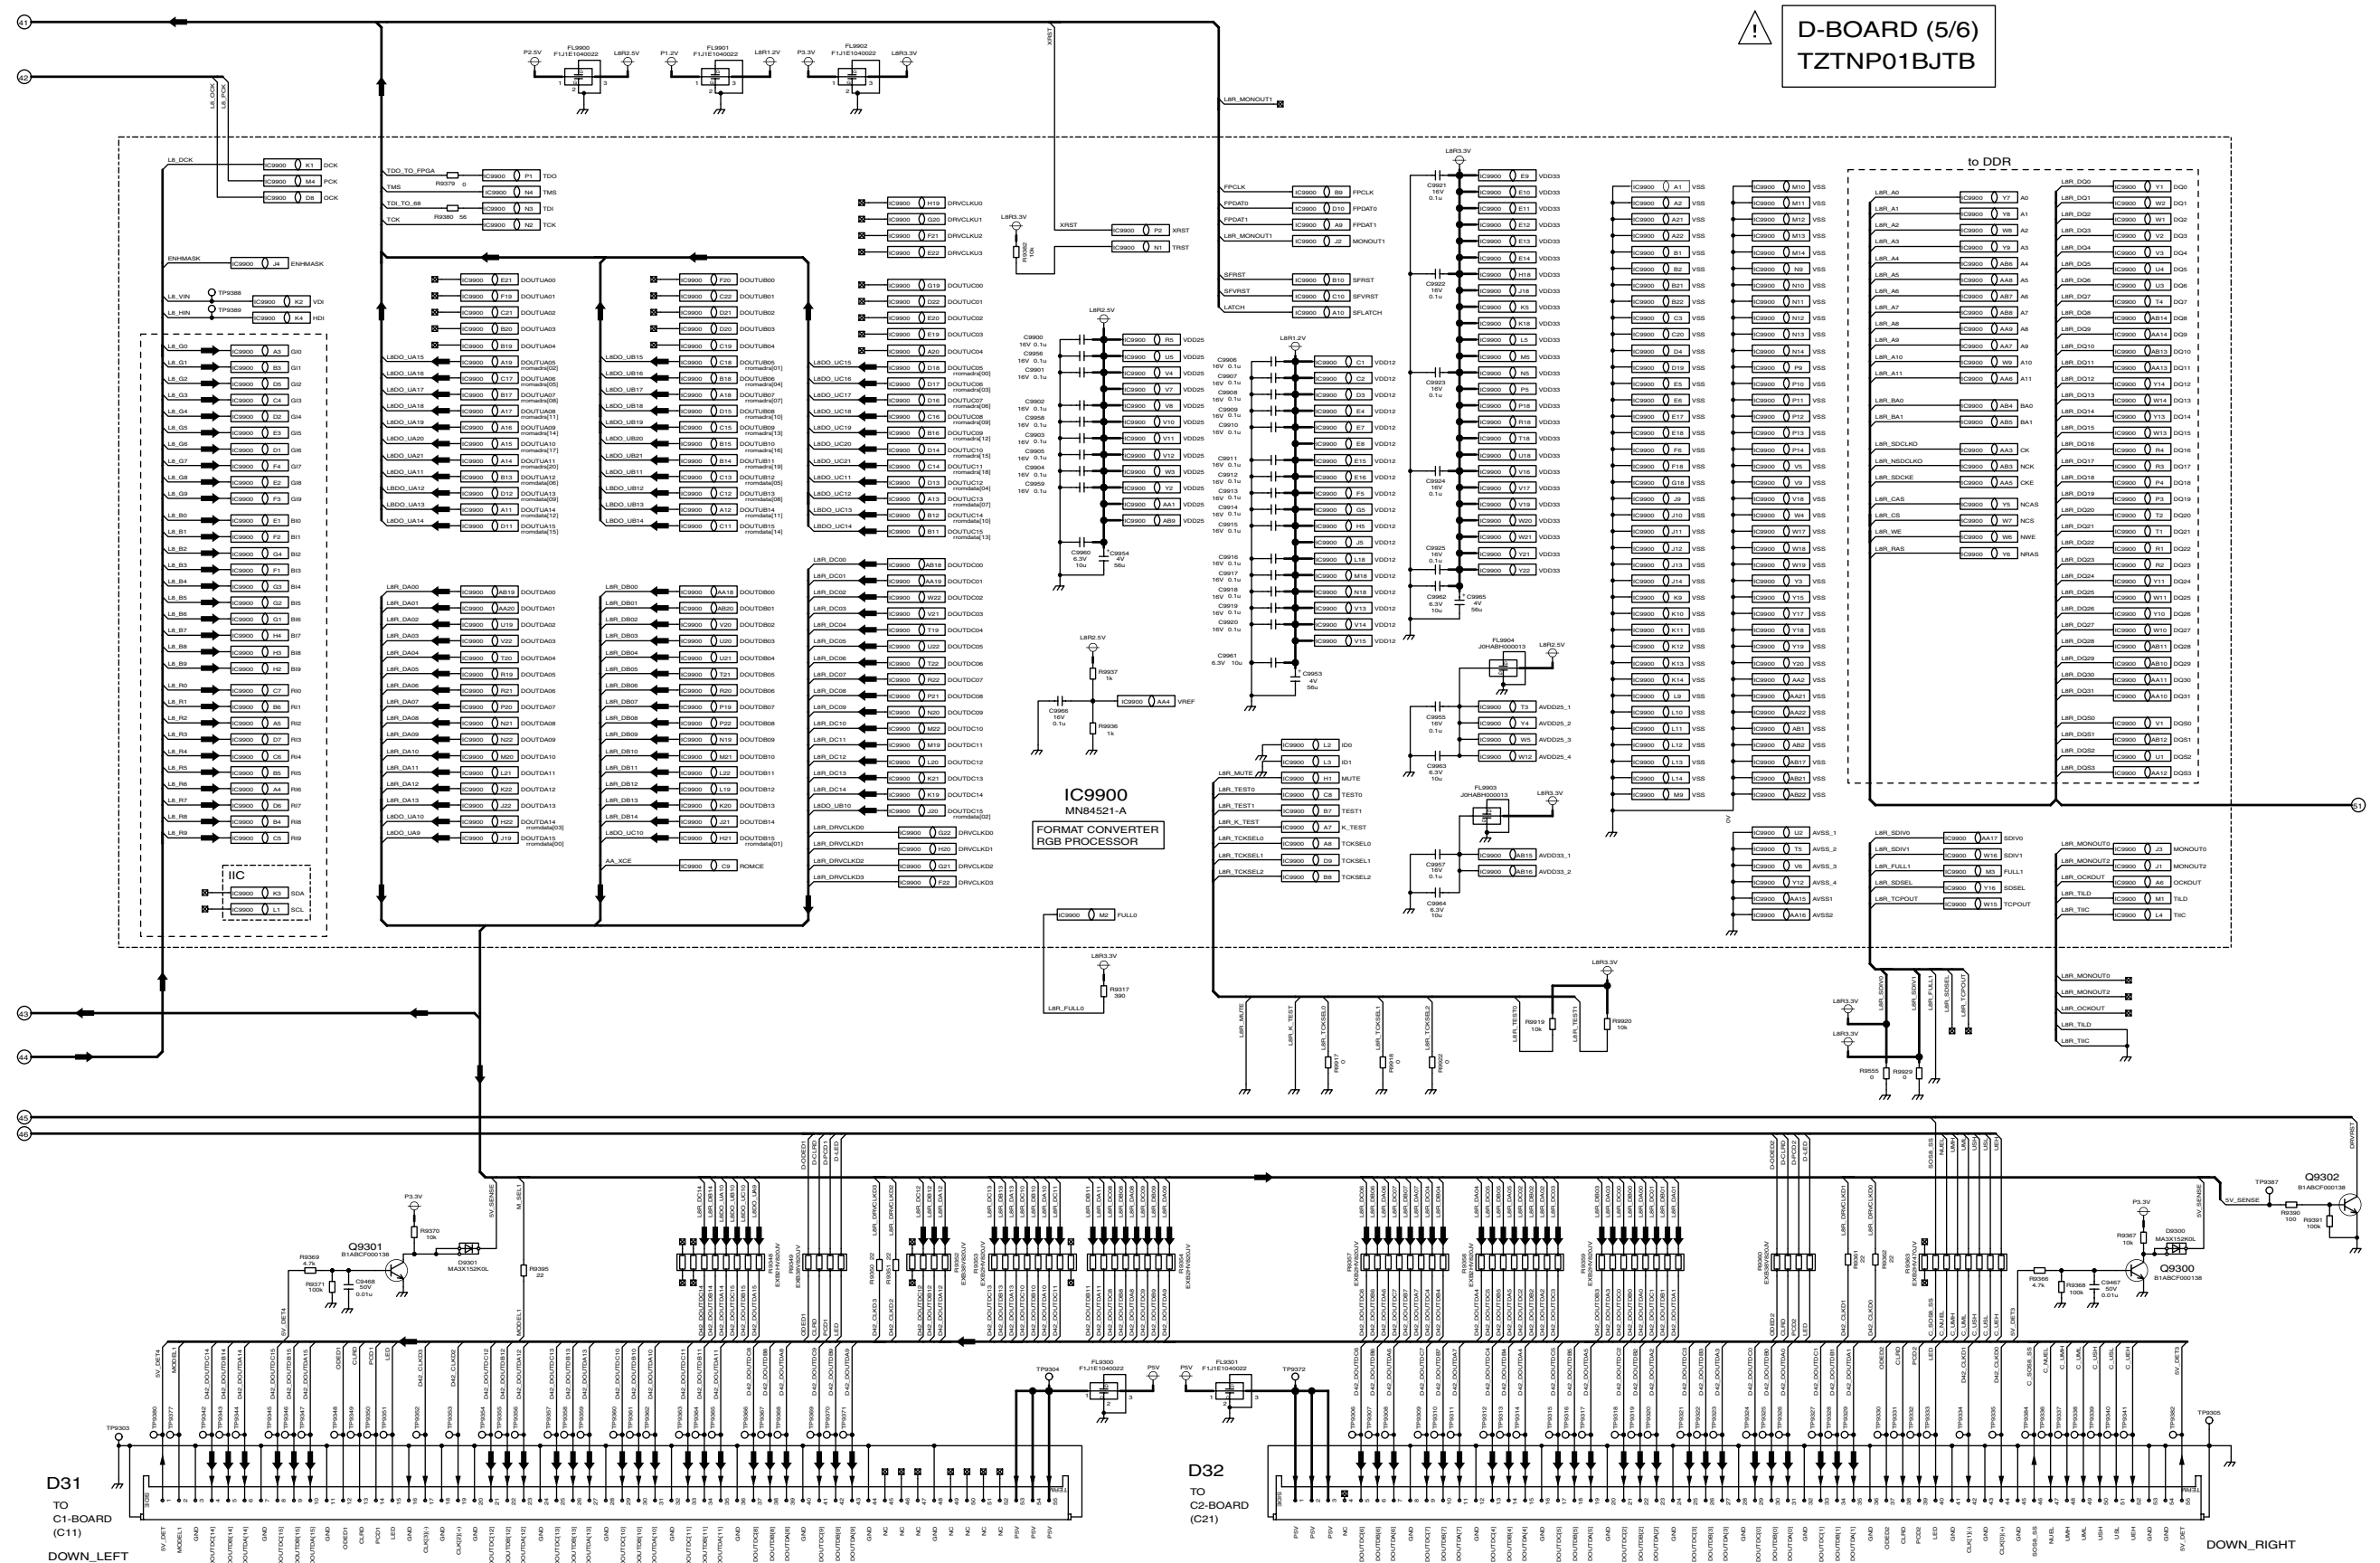


TH-42PV60A/H/M/MT D-Board (5 of 6) Schematic Diagram

TH-42PV60A/H/M/MT D-Board (5 of 6) Schematic Diagram

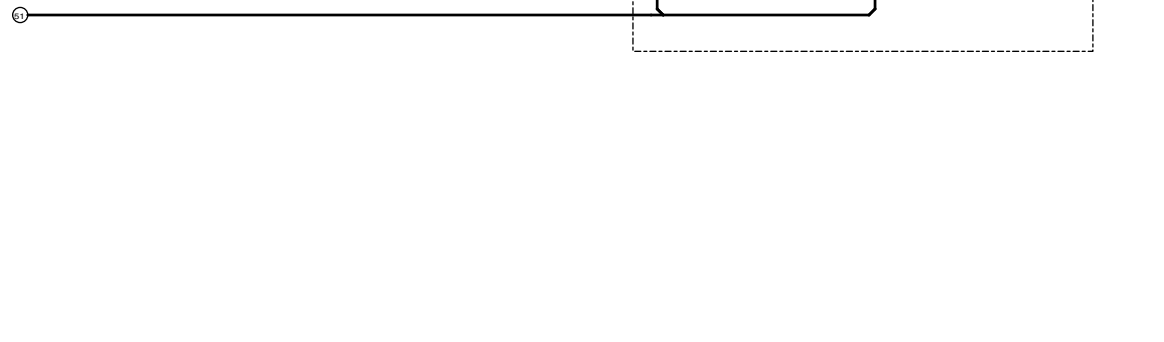

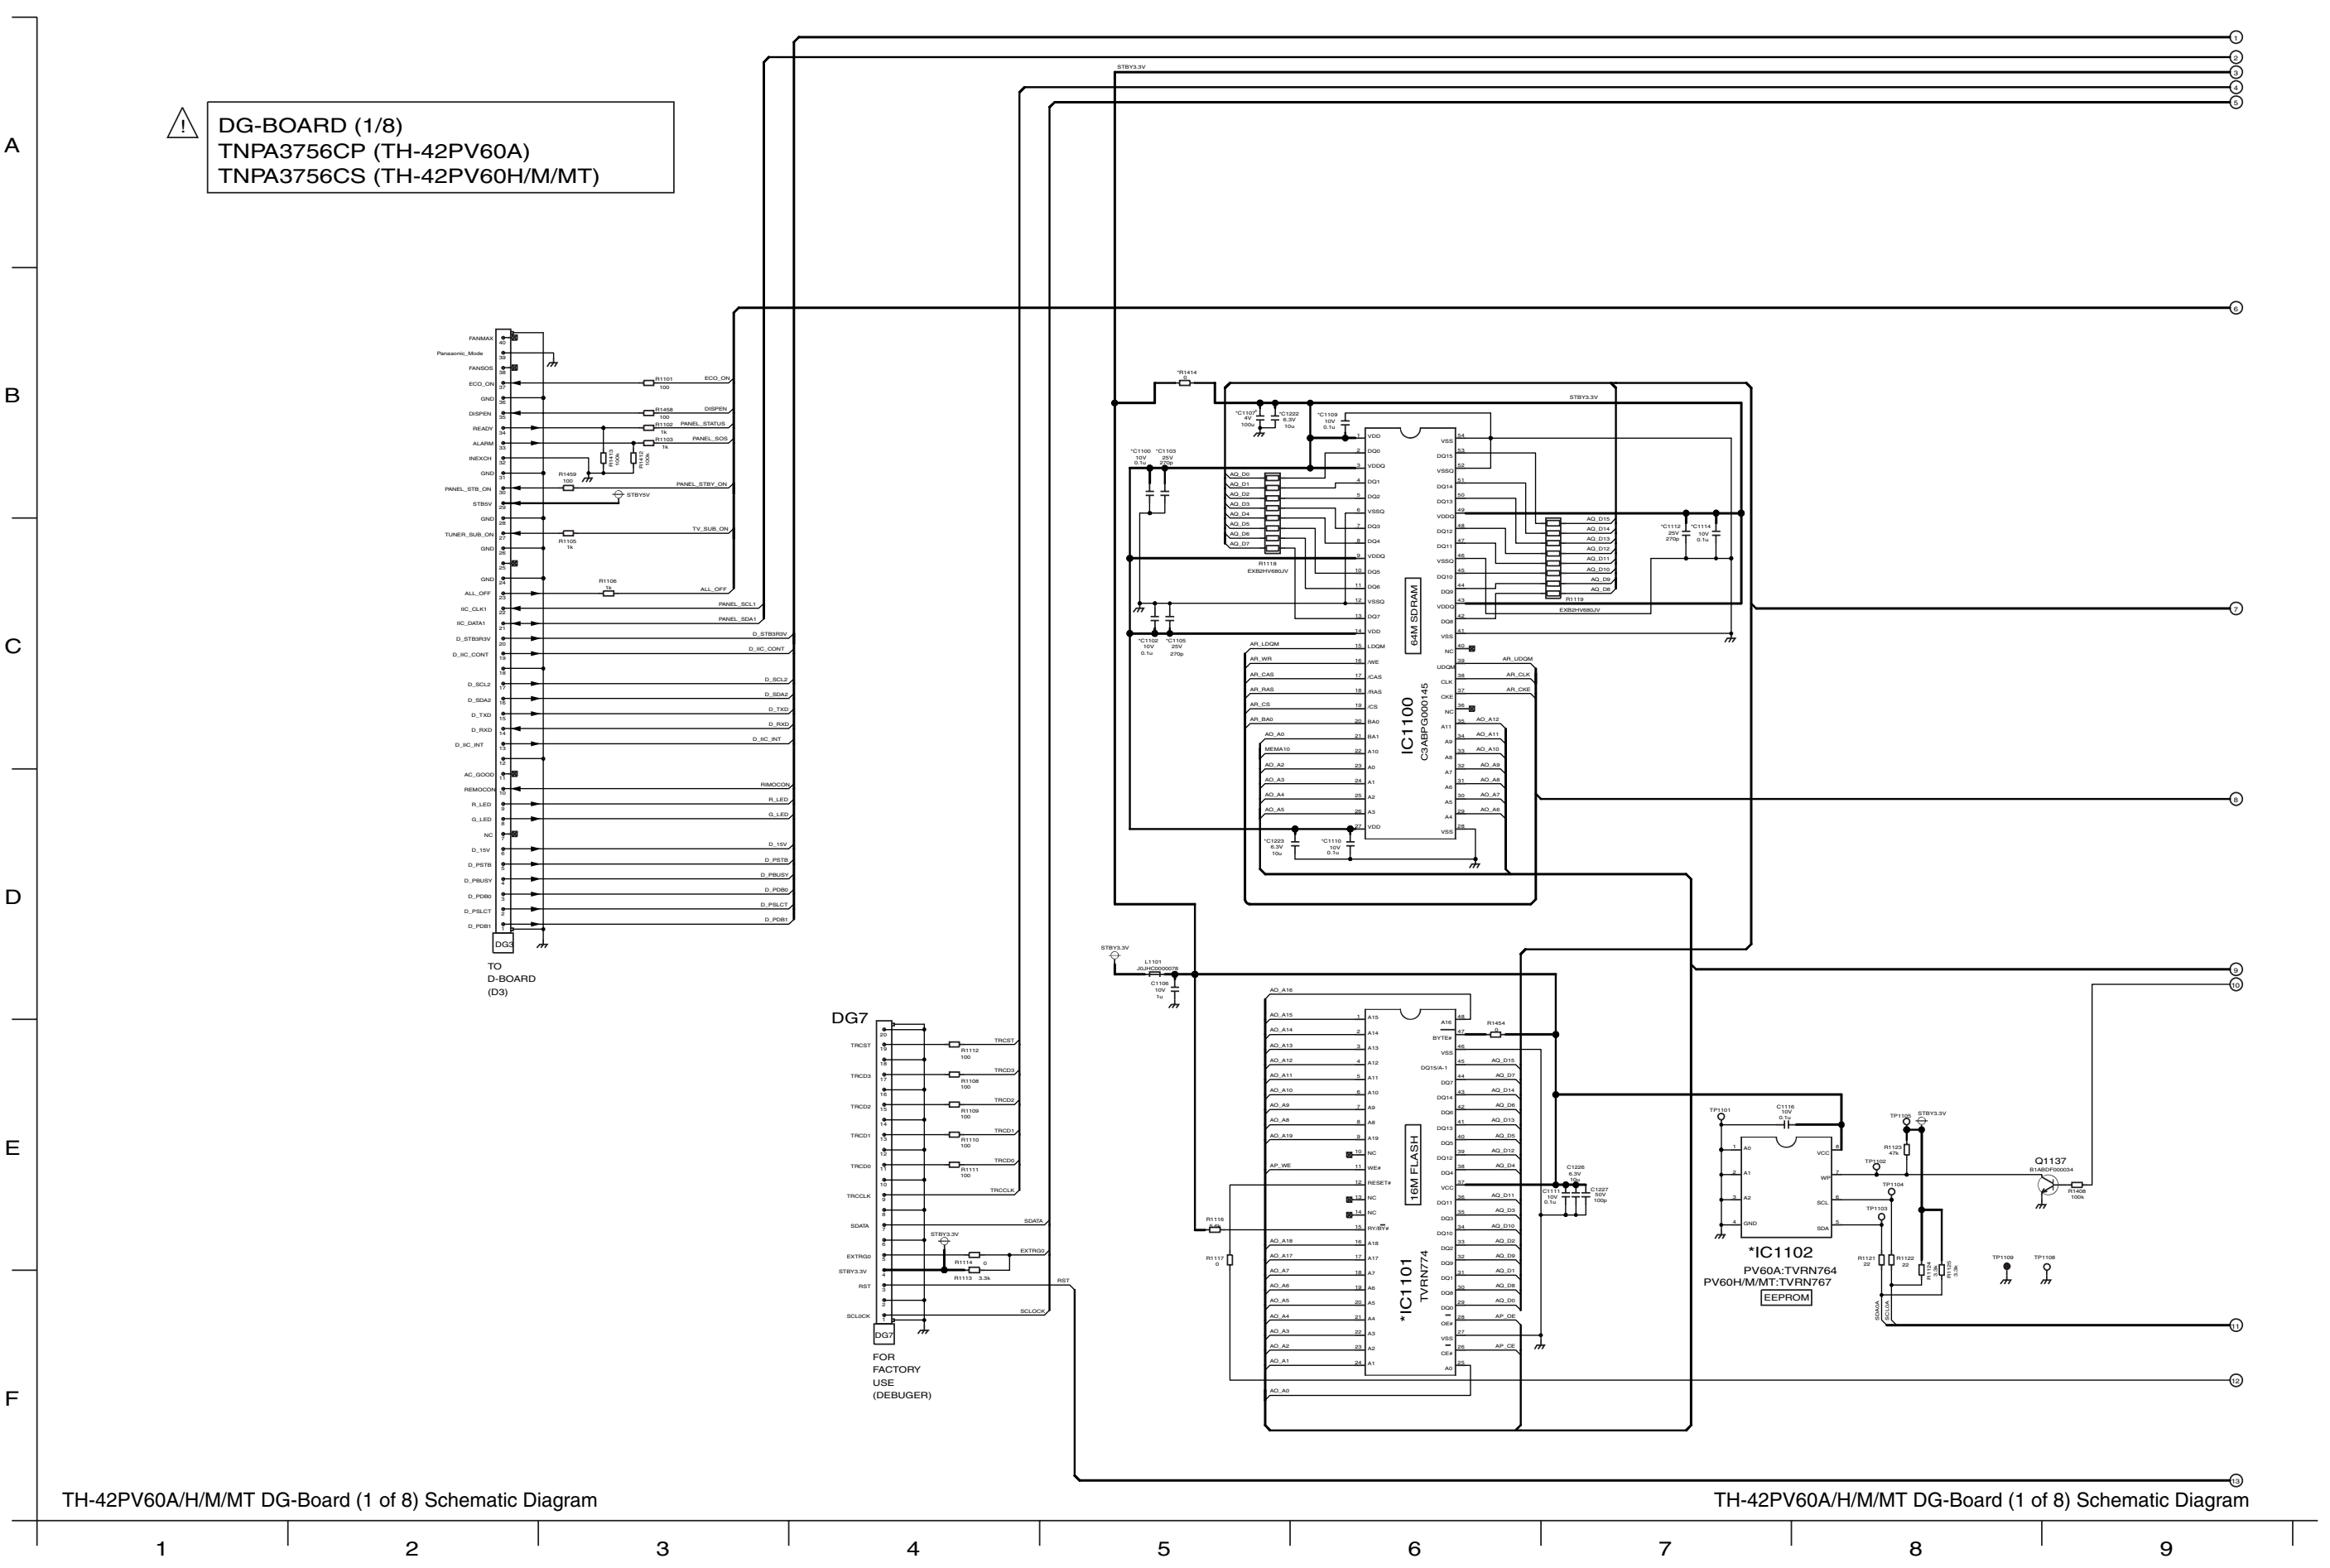


TH-42PV60A/H/M/MT DG-Board (1 of 8) Schematic Diagram

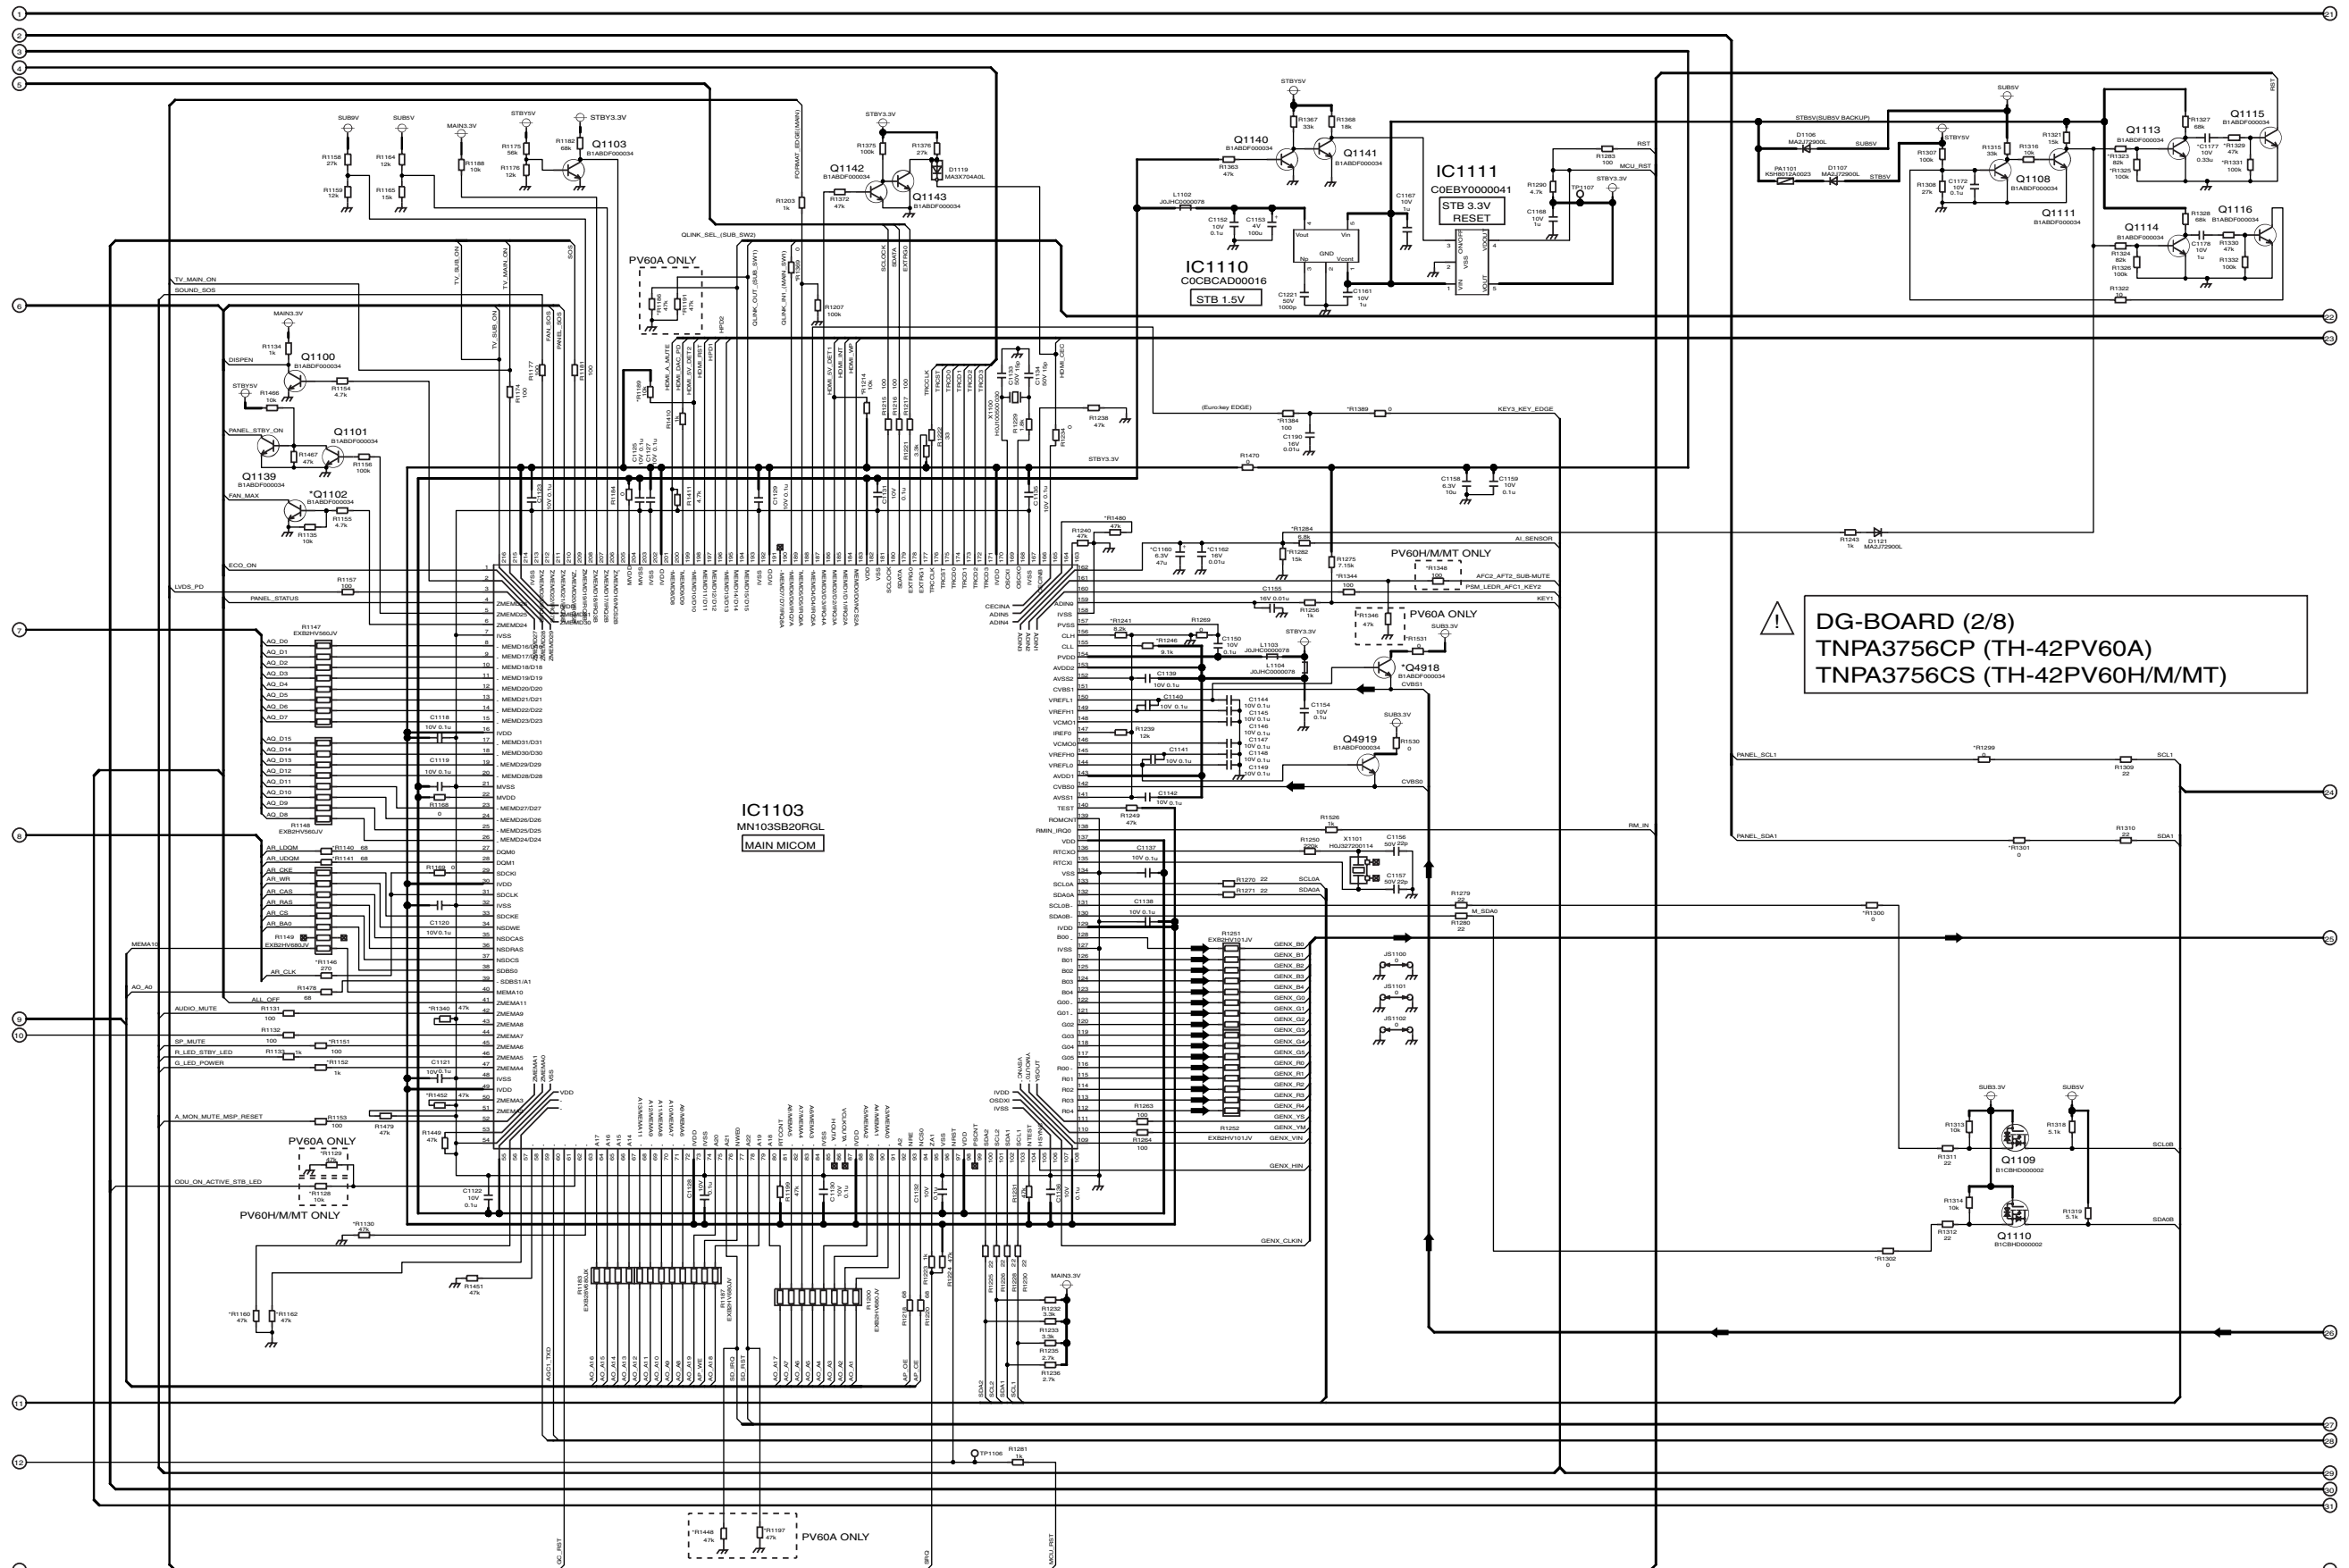

TH-42PV60A/H/M/MT DG-Board (2 of 8) Schematic Diagram

TH-42PV60A/H/M/MT DG-Board (2 of 8) Schematic Diagram

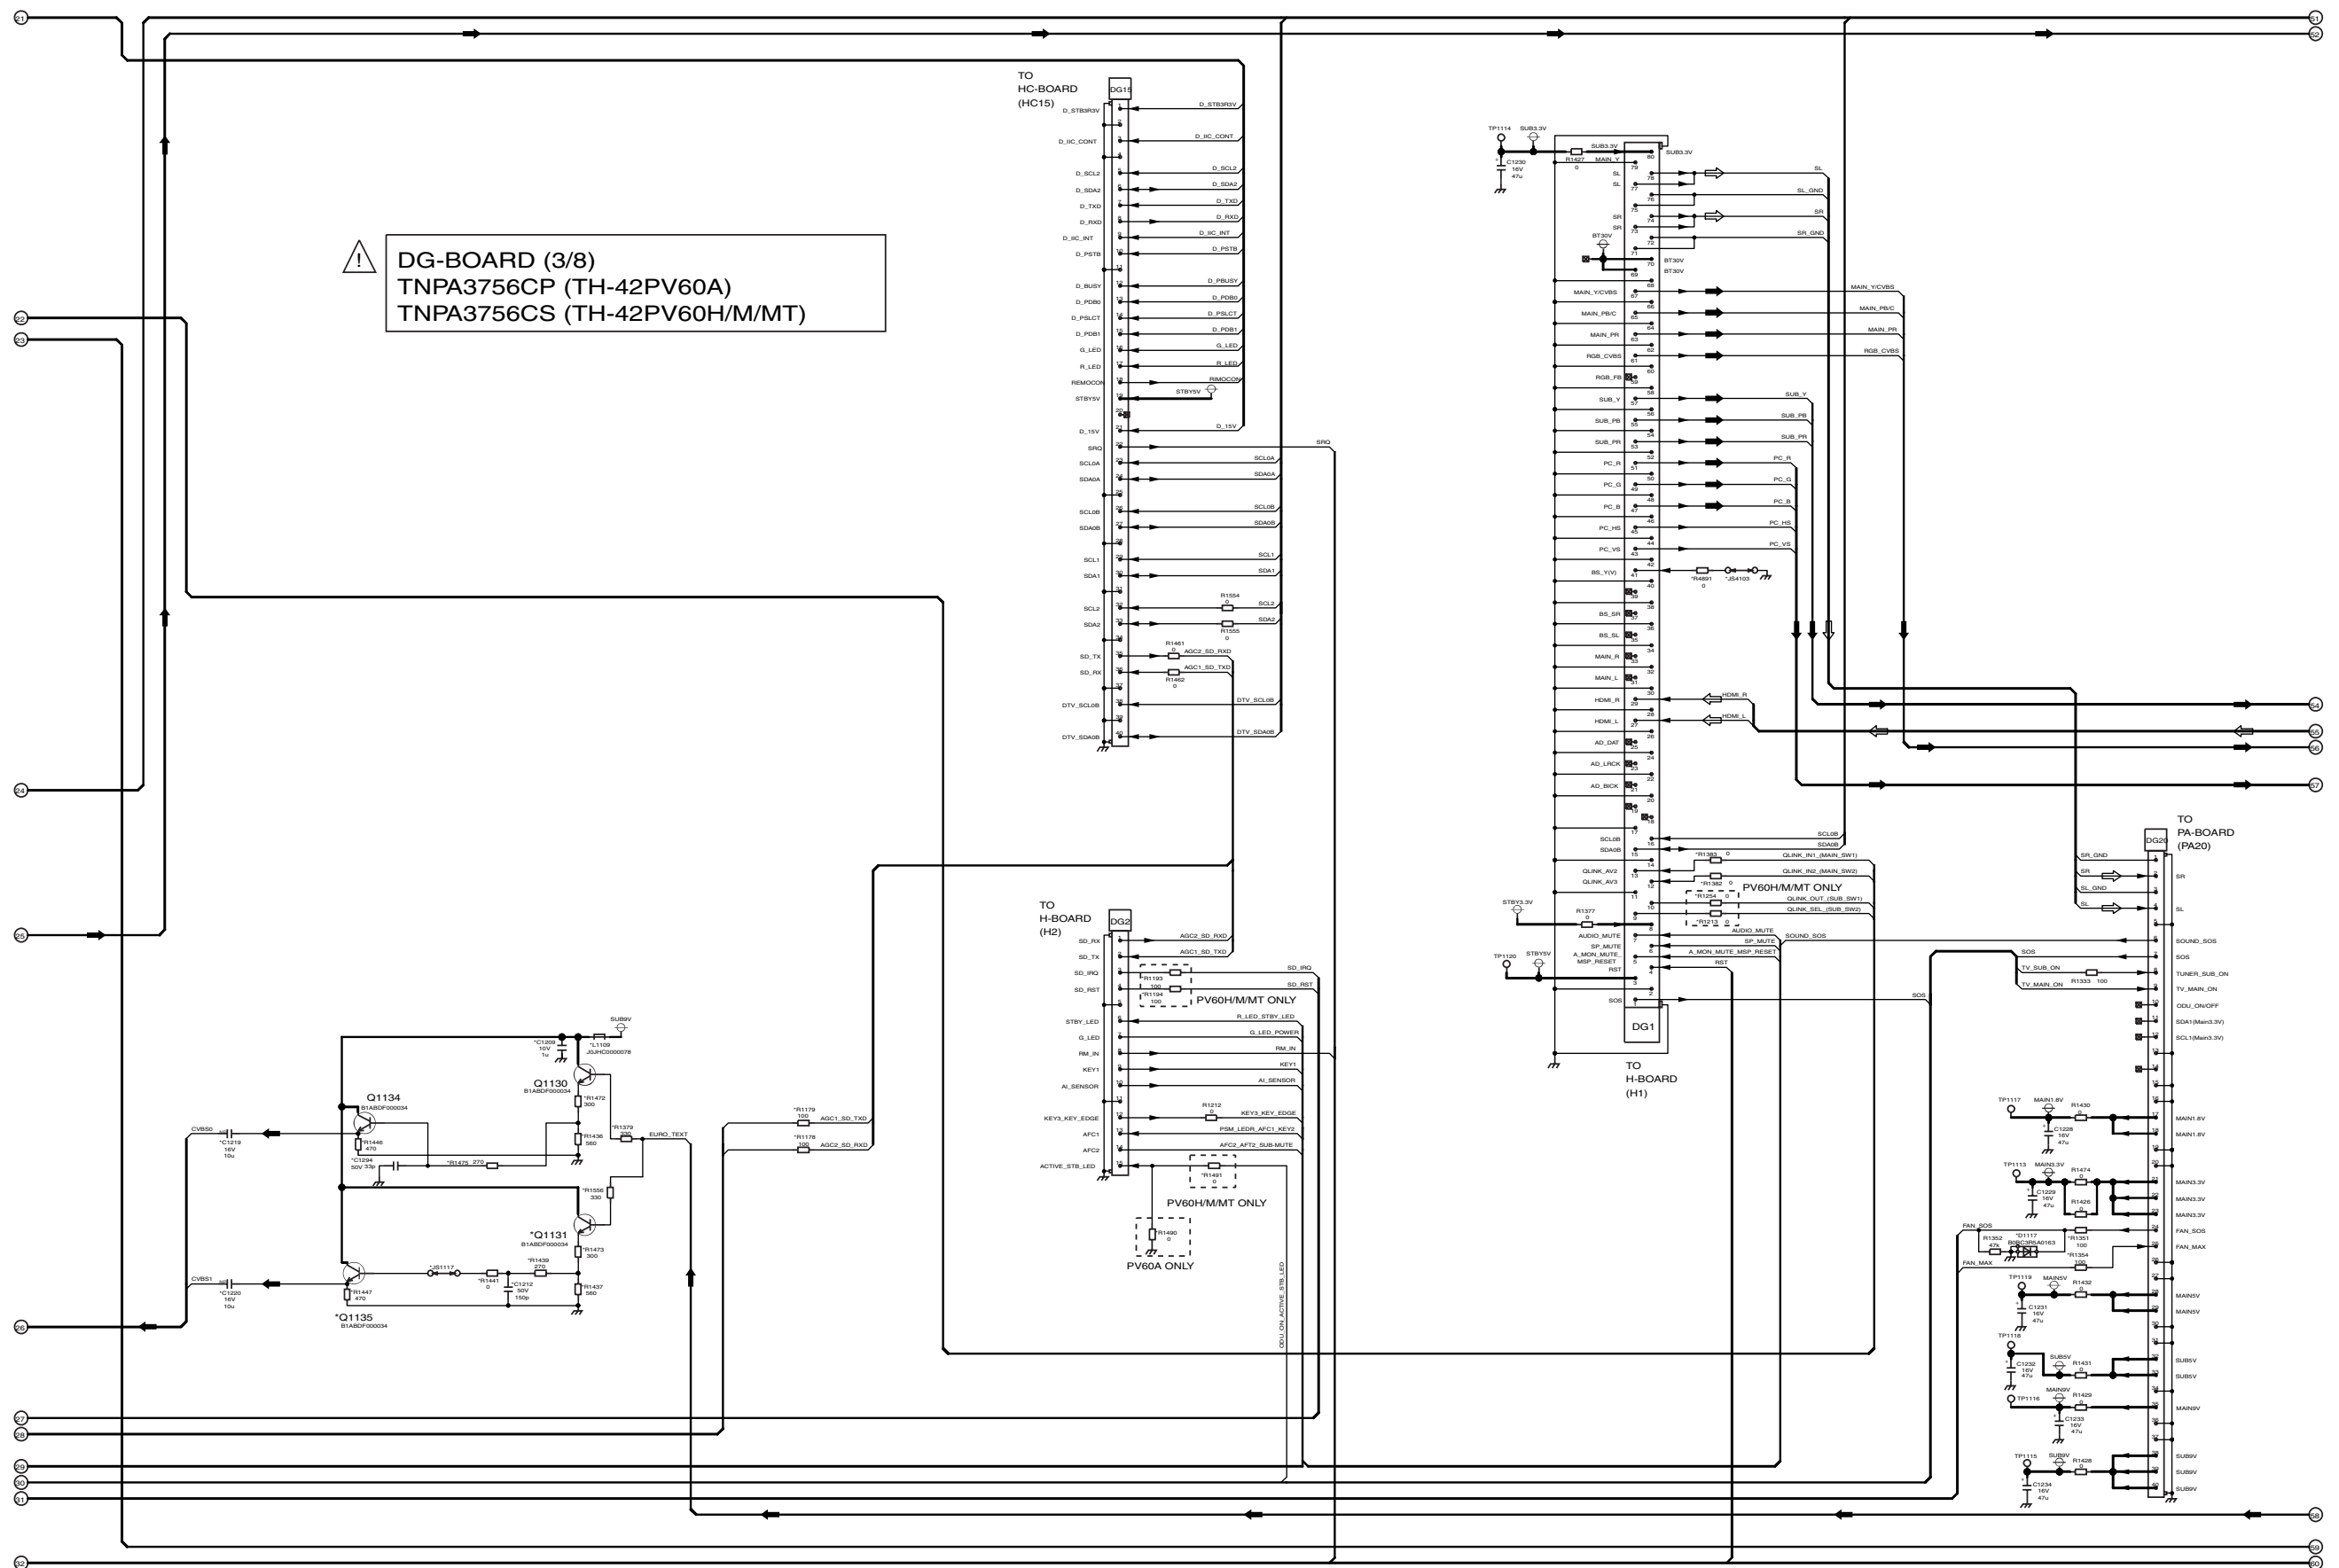



TH-42PV60A/H/M/MT DG-Board (3 of 8) Schematic Diagram

TH-42PV60A/H/M/MT DG-Board (3 of 8) Schematic Diagram





DG-BOARD (4/8)
TNPA3756CP (TH-42PV60A)
TNPA3756CS (TH-42PV60H/M/MT)



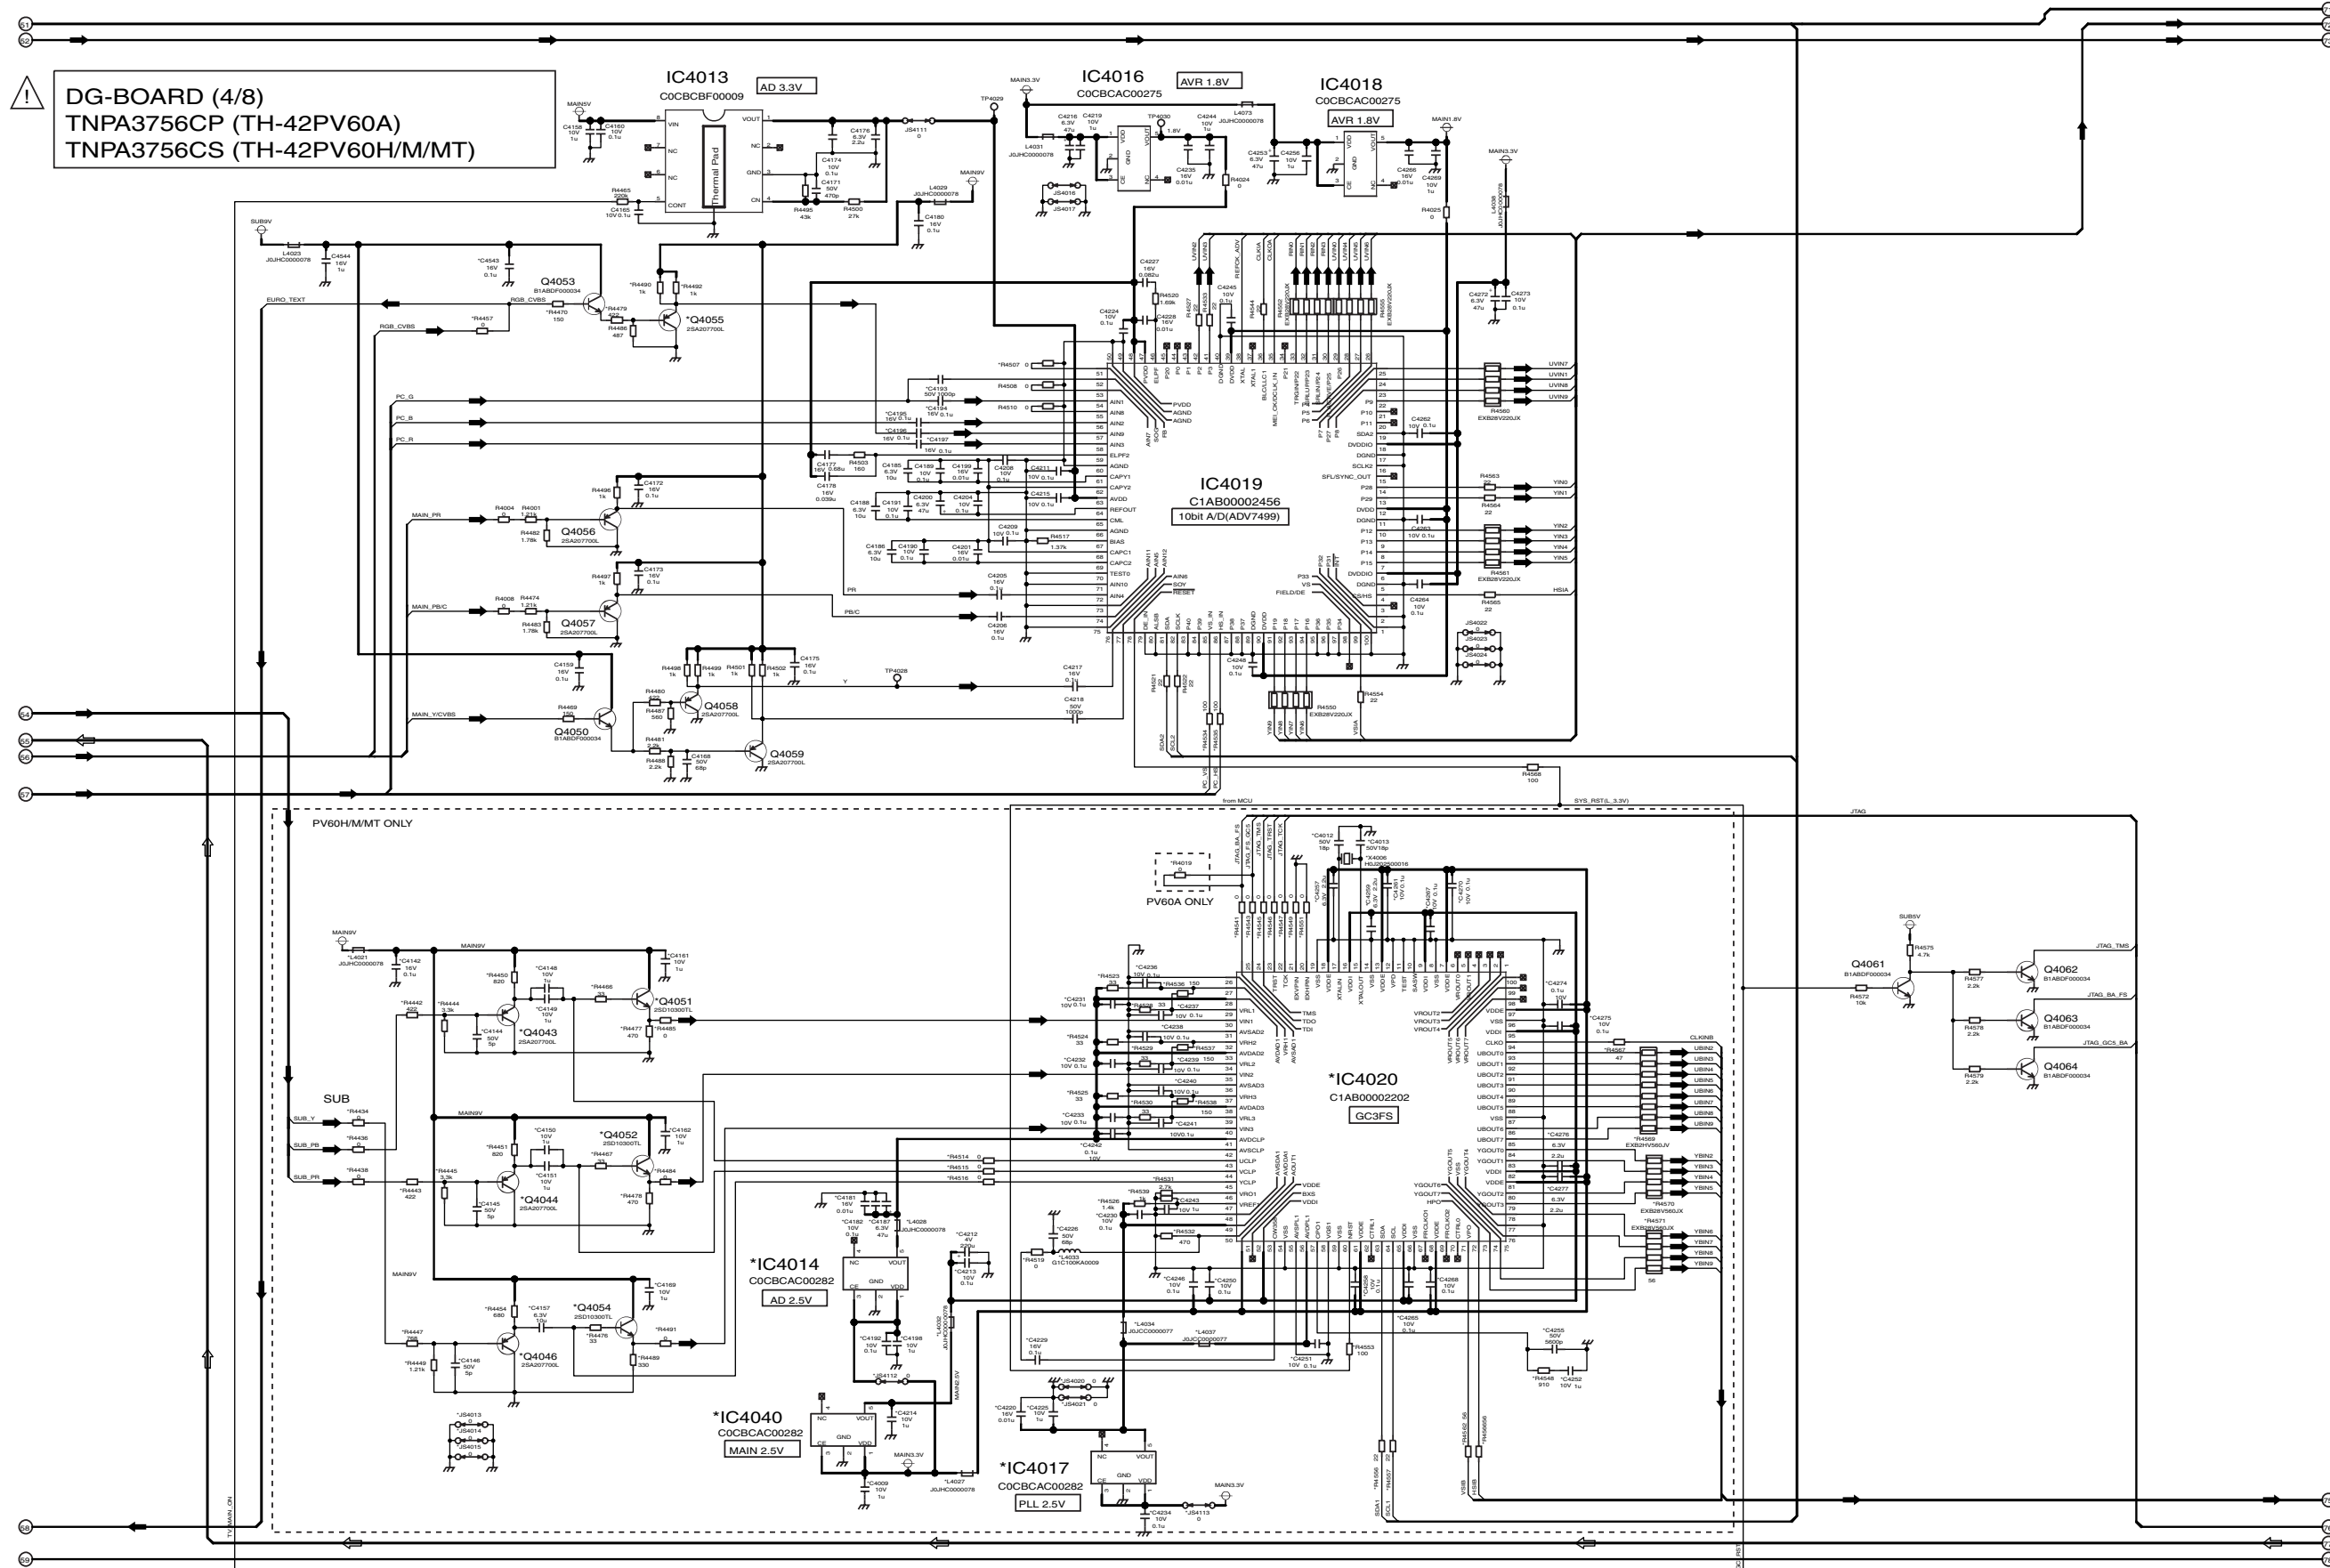


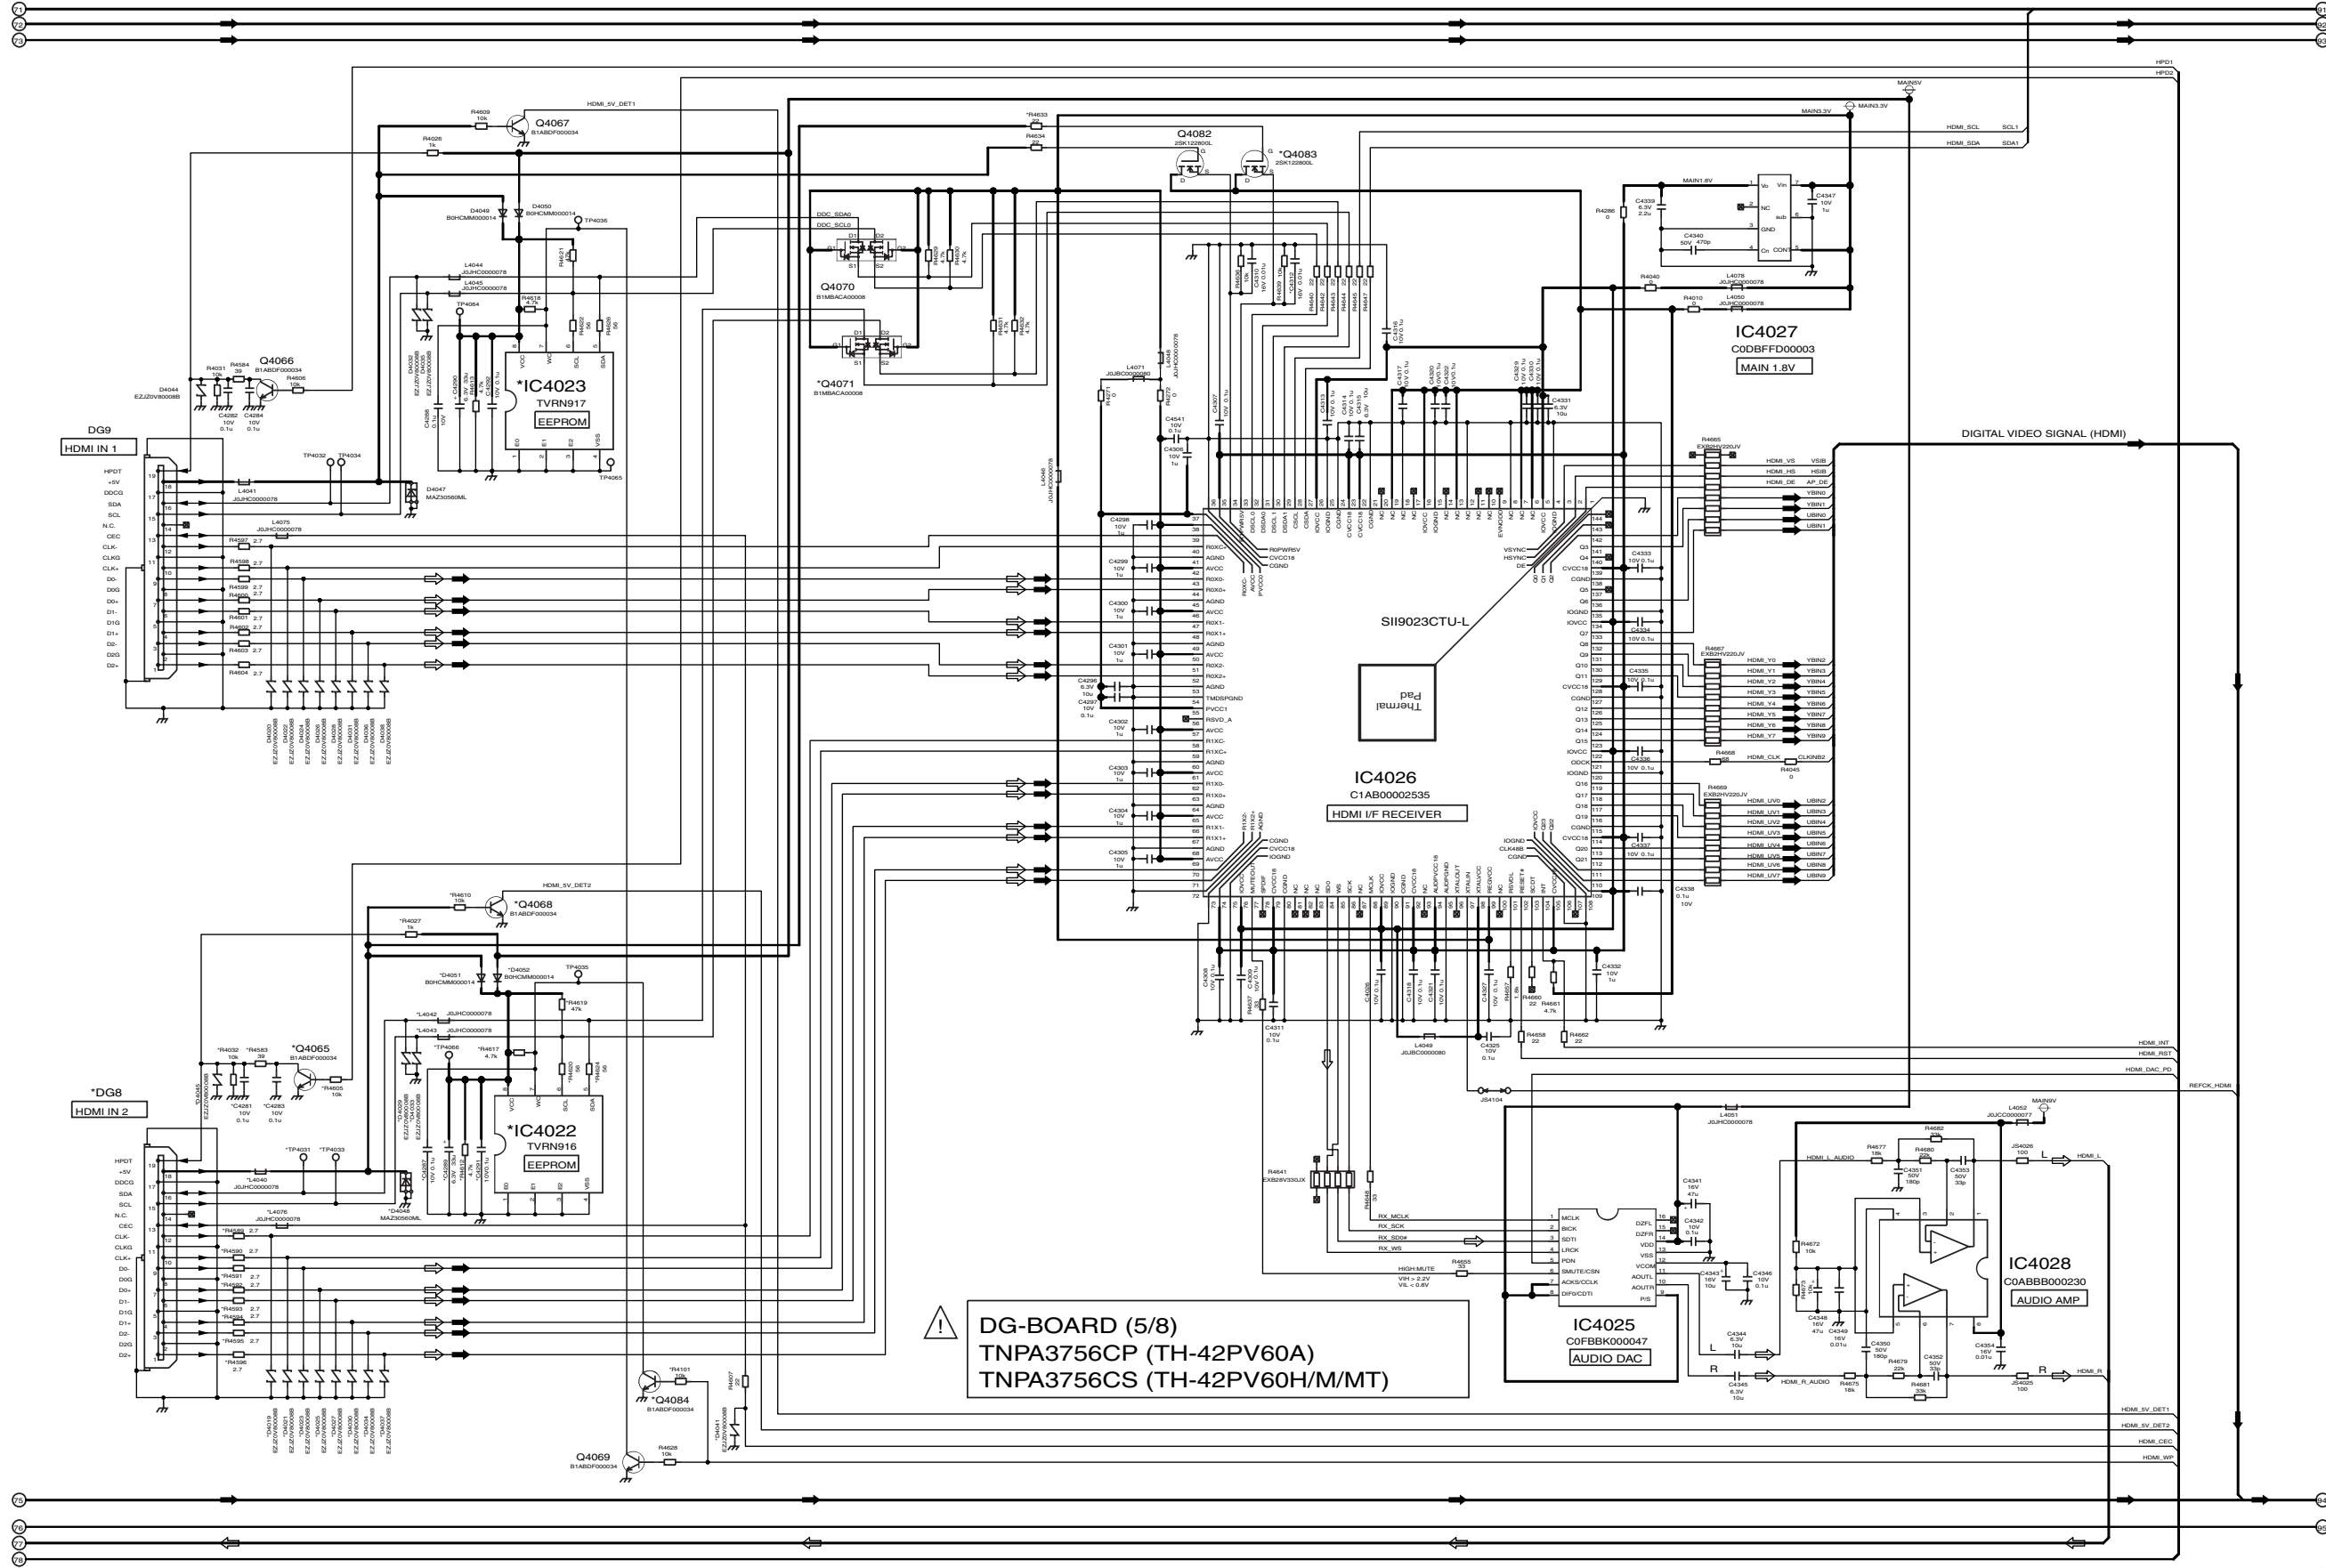

TH-42PV60A/H/M/MT DG-Board (5 of 8) Schematic Diagram


TH-42PV60A/H/M/MT DG-Board (5 of 8) Schematic Diagram



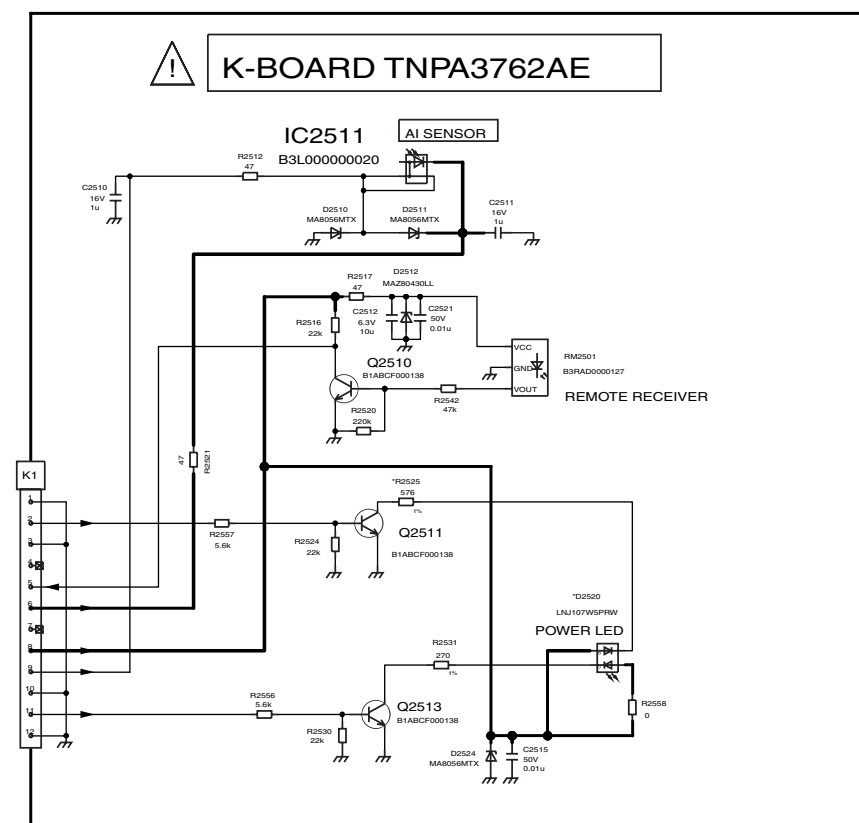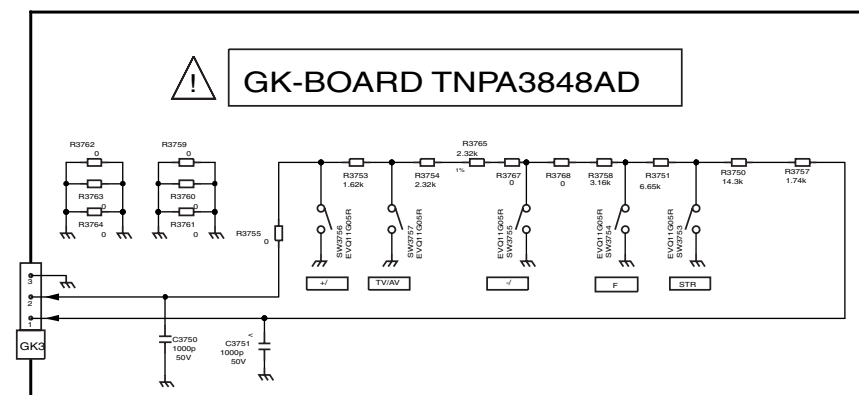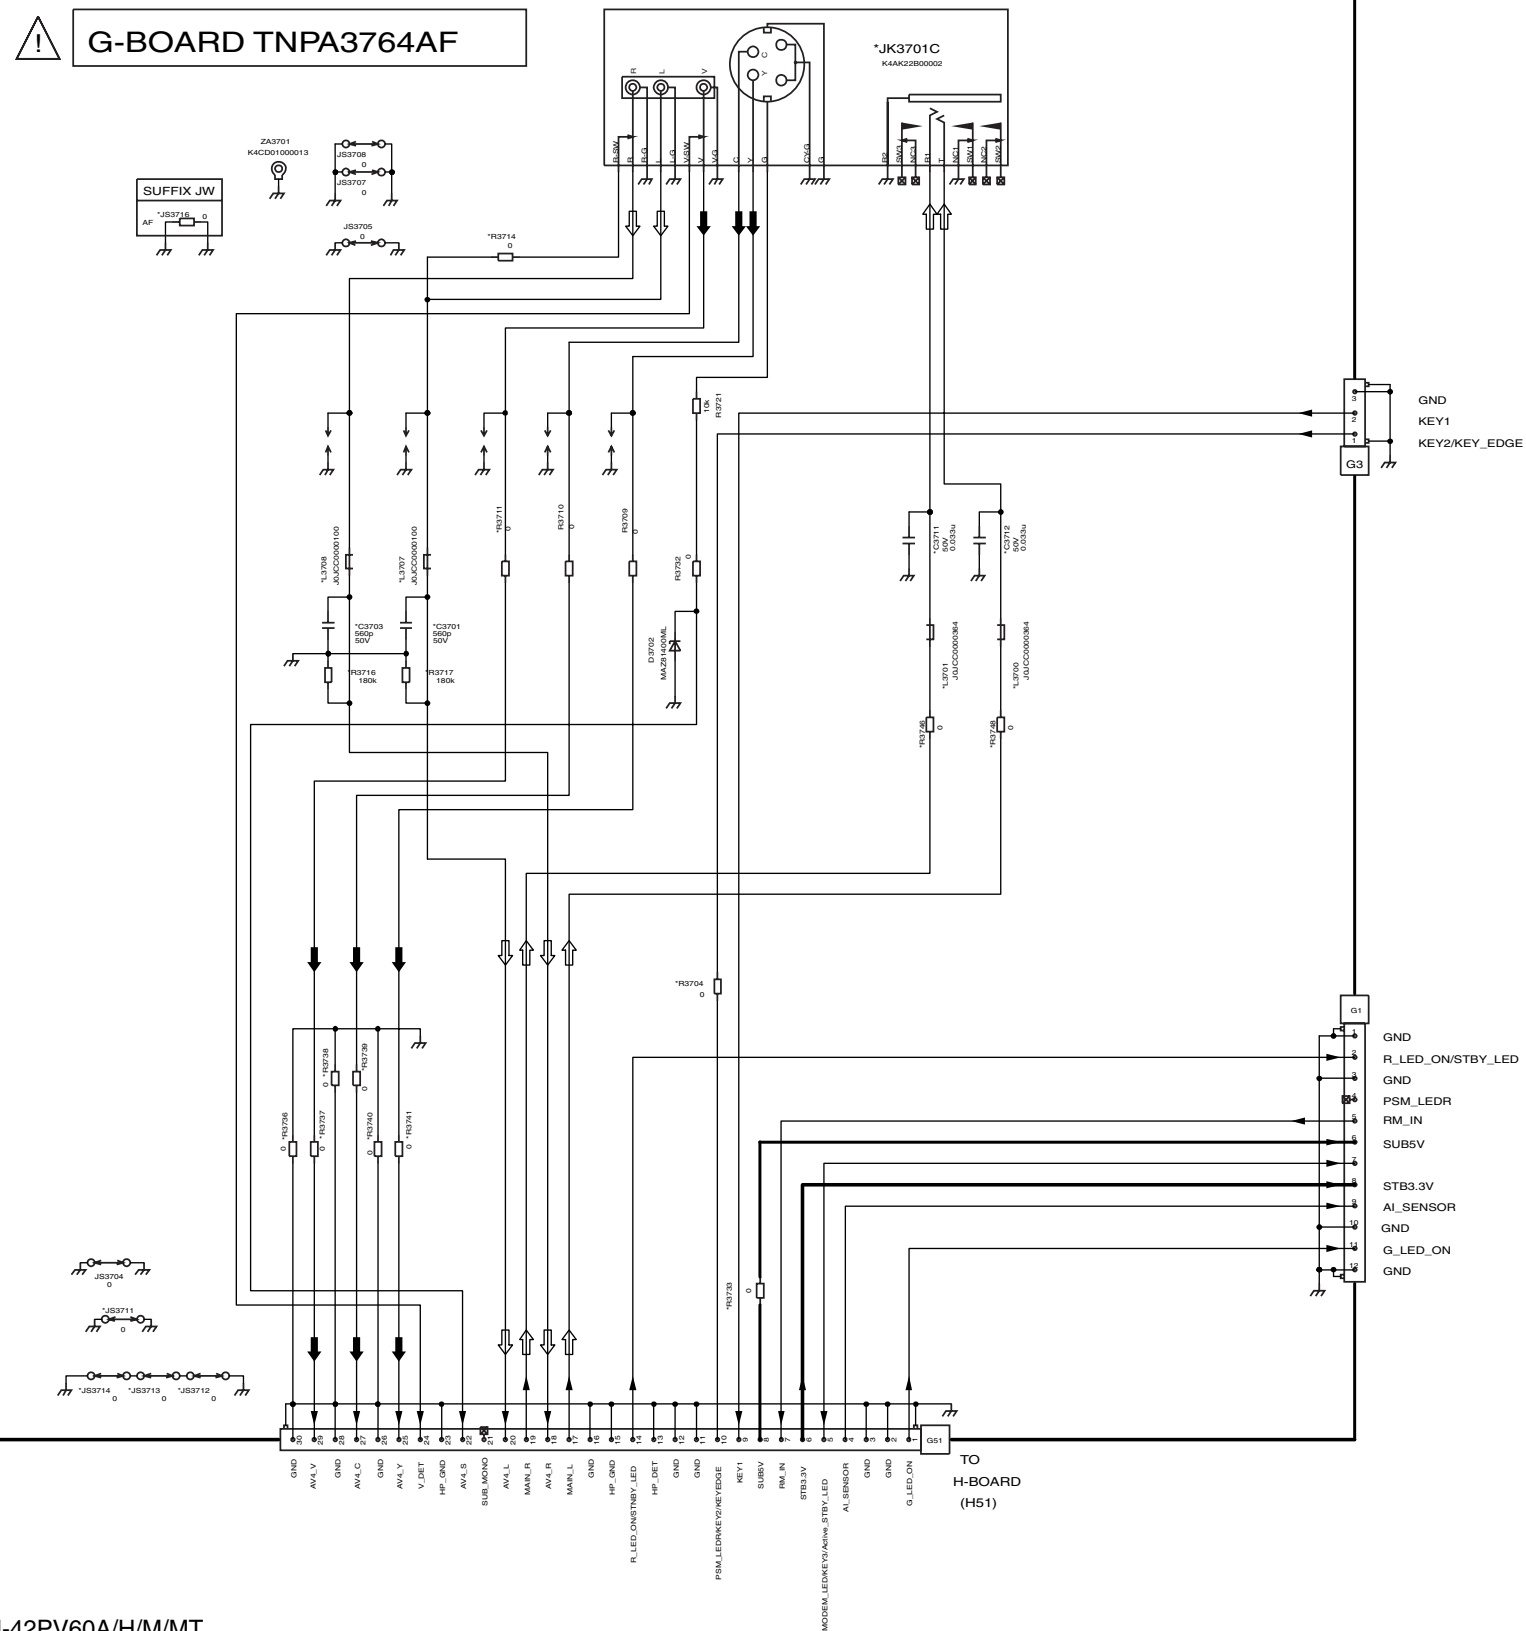

TH-42PV60A/H/M/MT
G, GK, and K-Board Schematic Diagram

TH-42PV60A/H/M/MT
G, GK, and K-Board Schematic Diagram

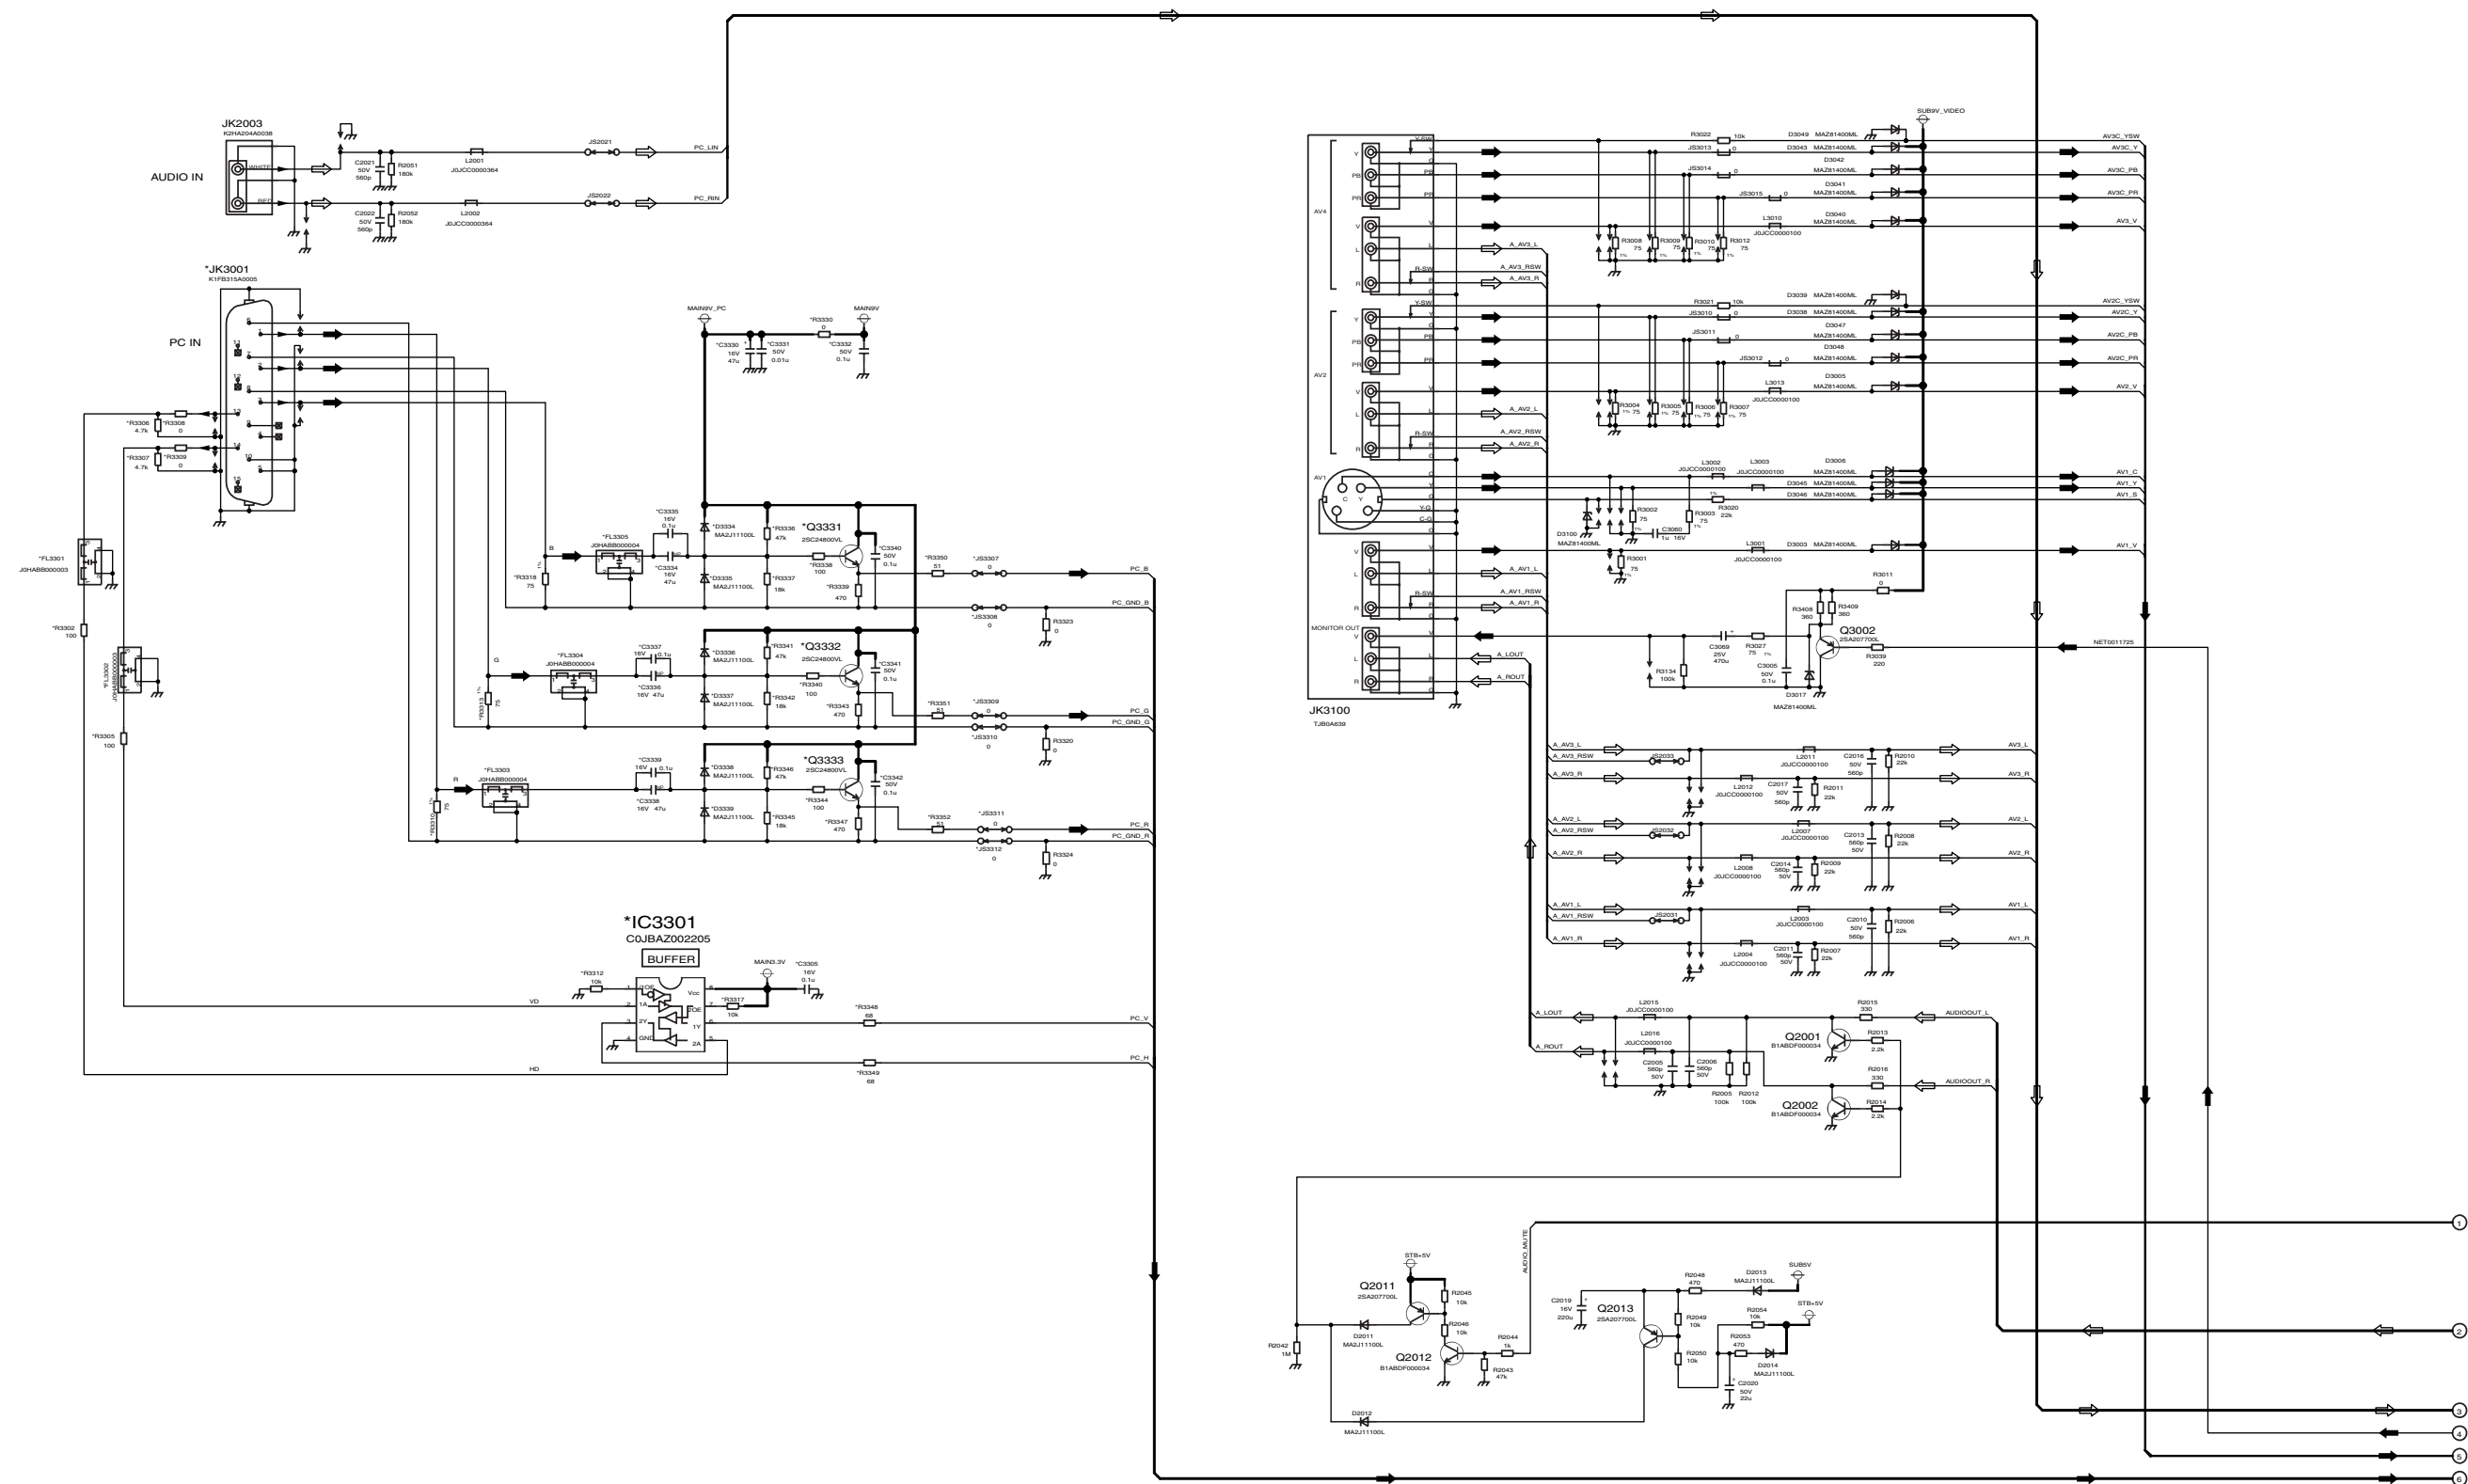


TH-42PV60A/H/M/MT H-Board (1 of 3) Schematic Diagram

TH-42PV60A/H/M/MT H-Board (1 of 3) Schematic Diagram




H-BOARD TNPA3760AD (2/3)

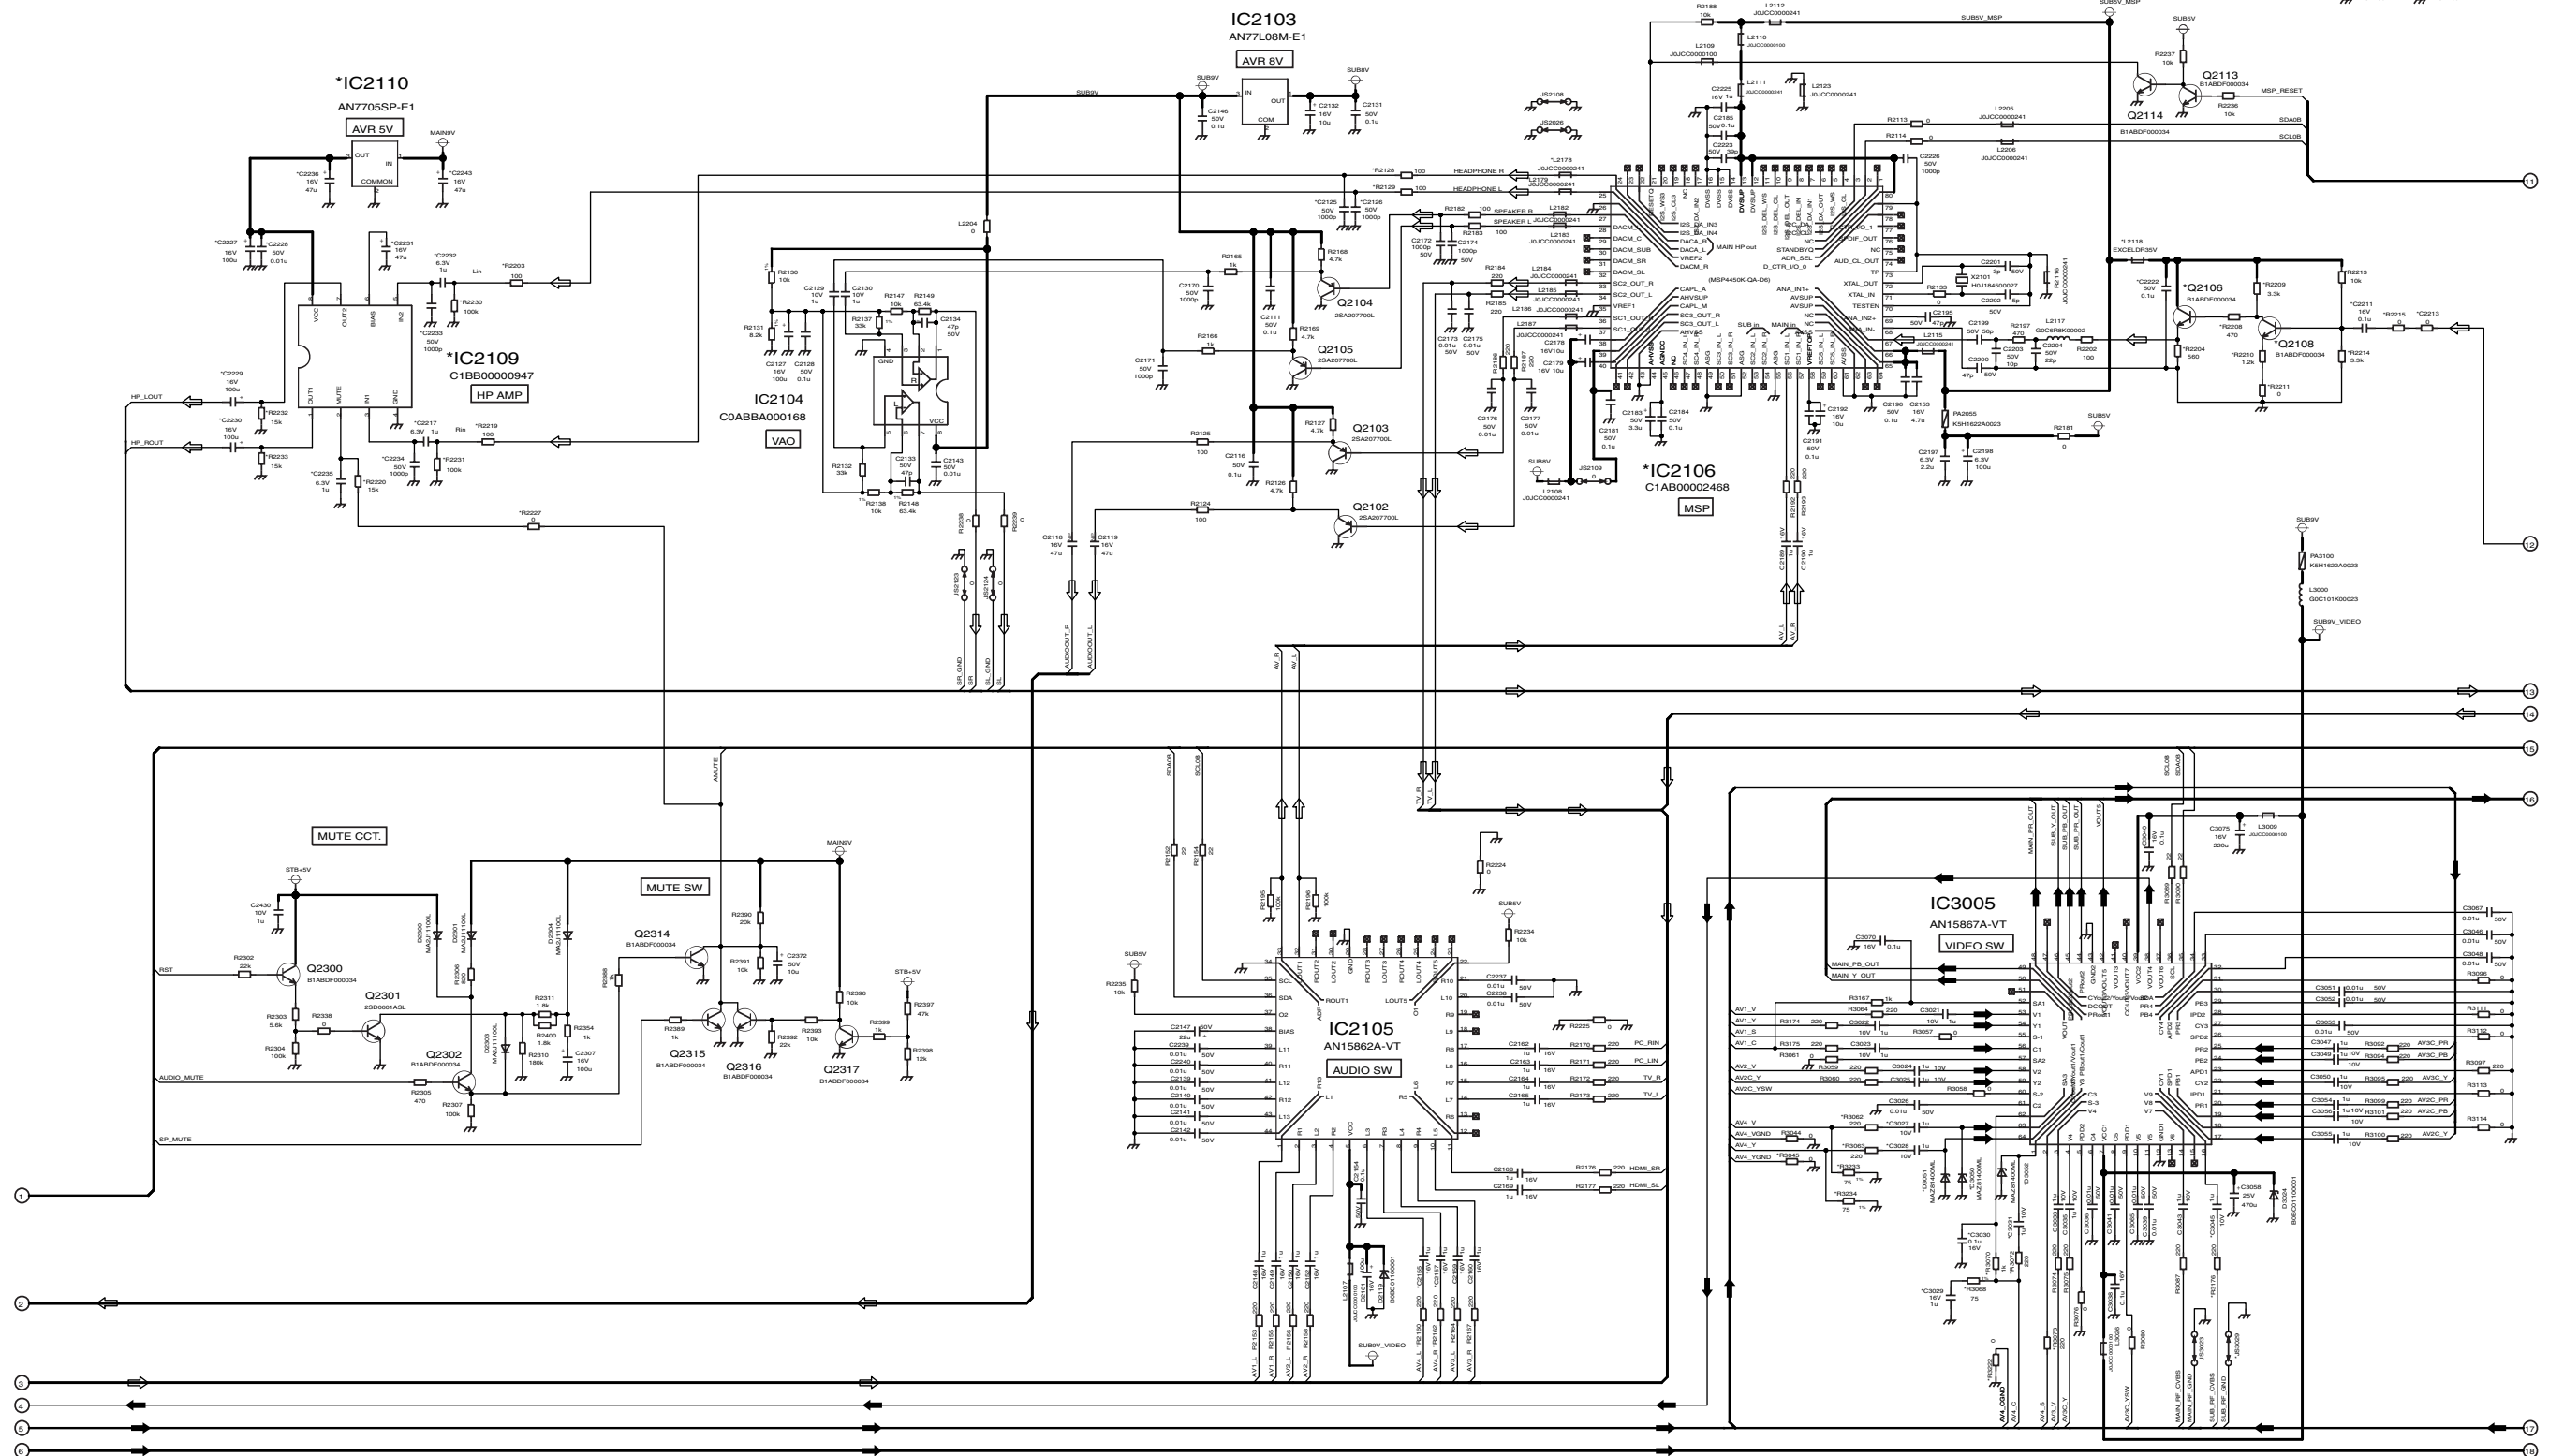





27


E

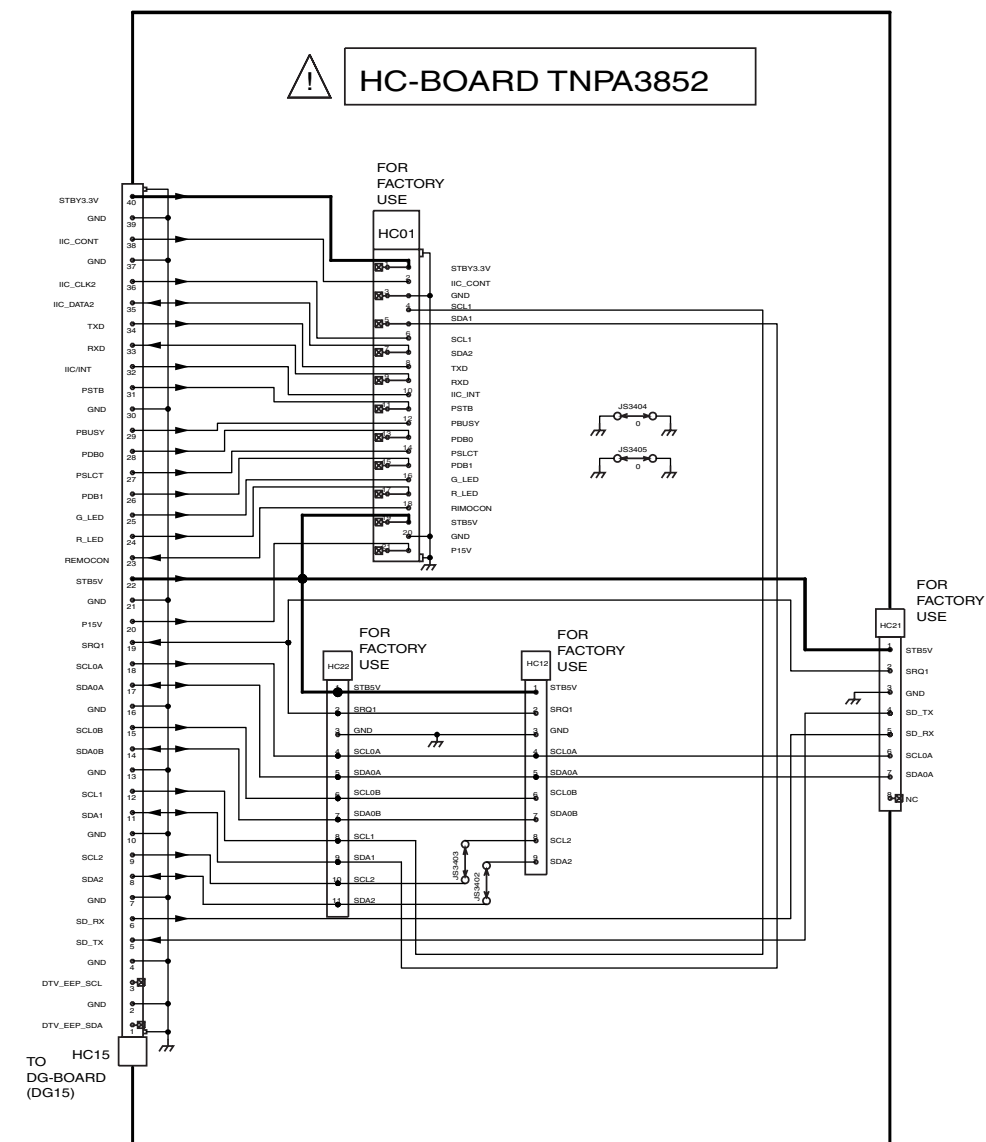

TH-42PV60A/H/M/MT
HC and TA-Board Schematic Diagram

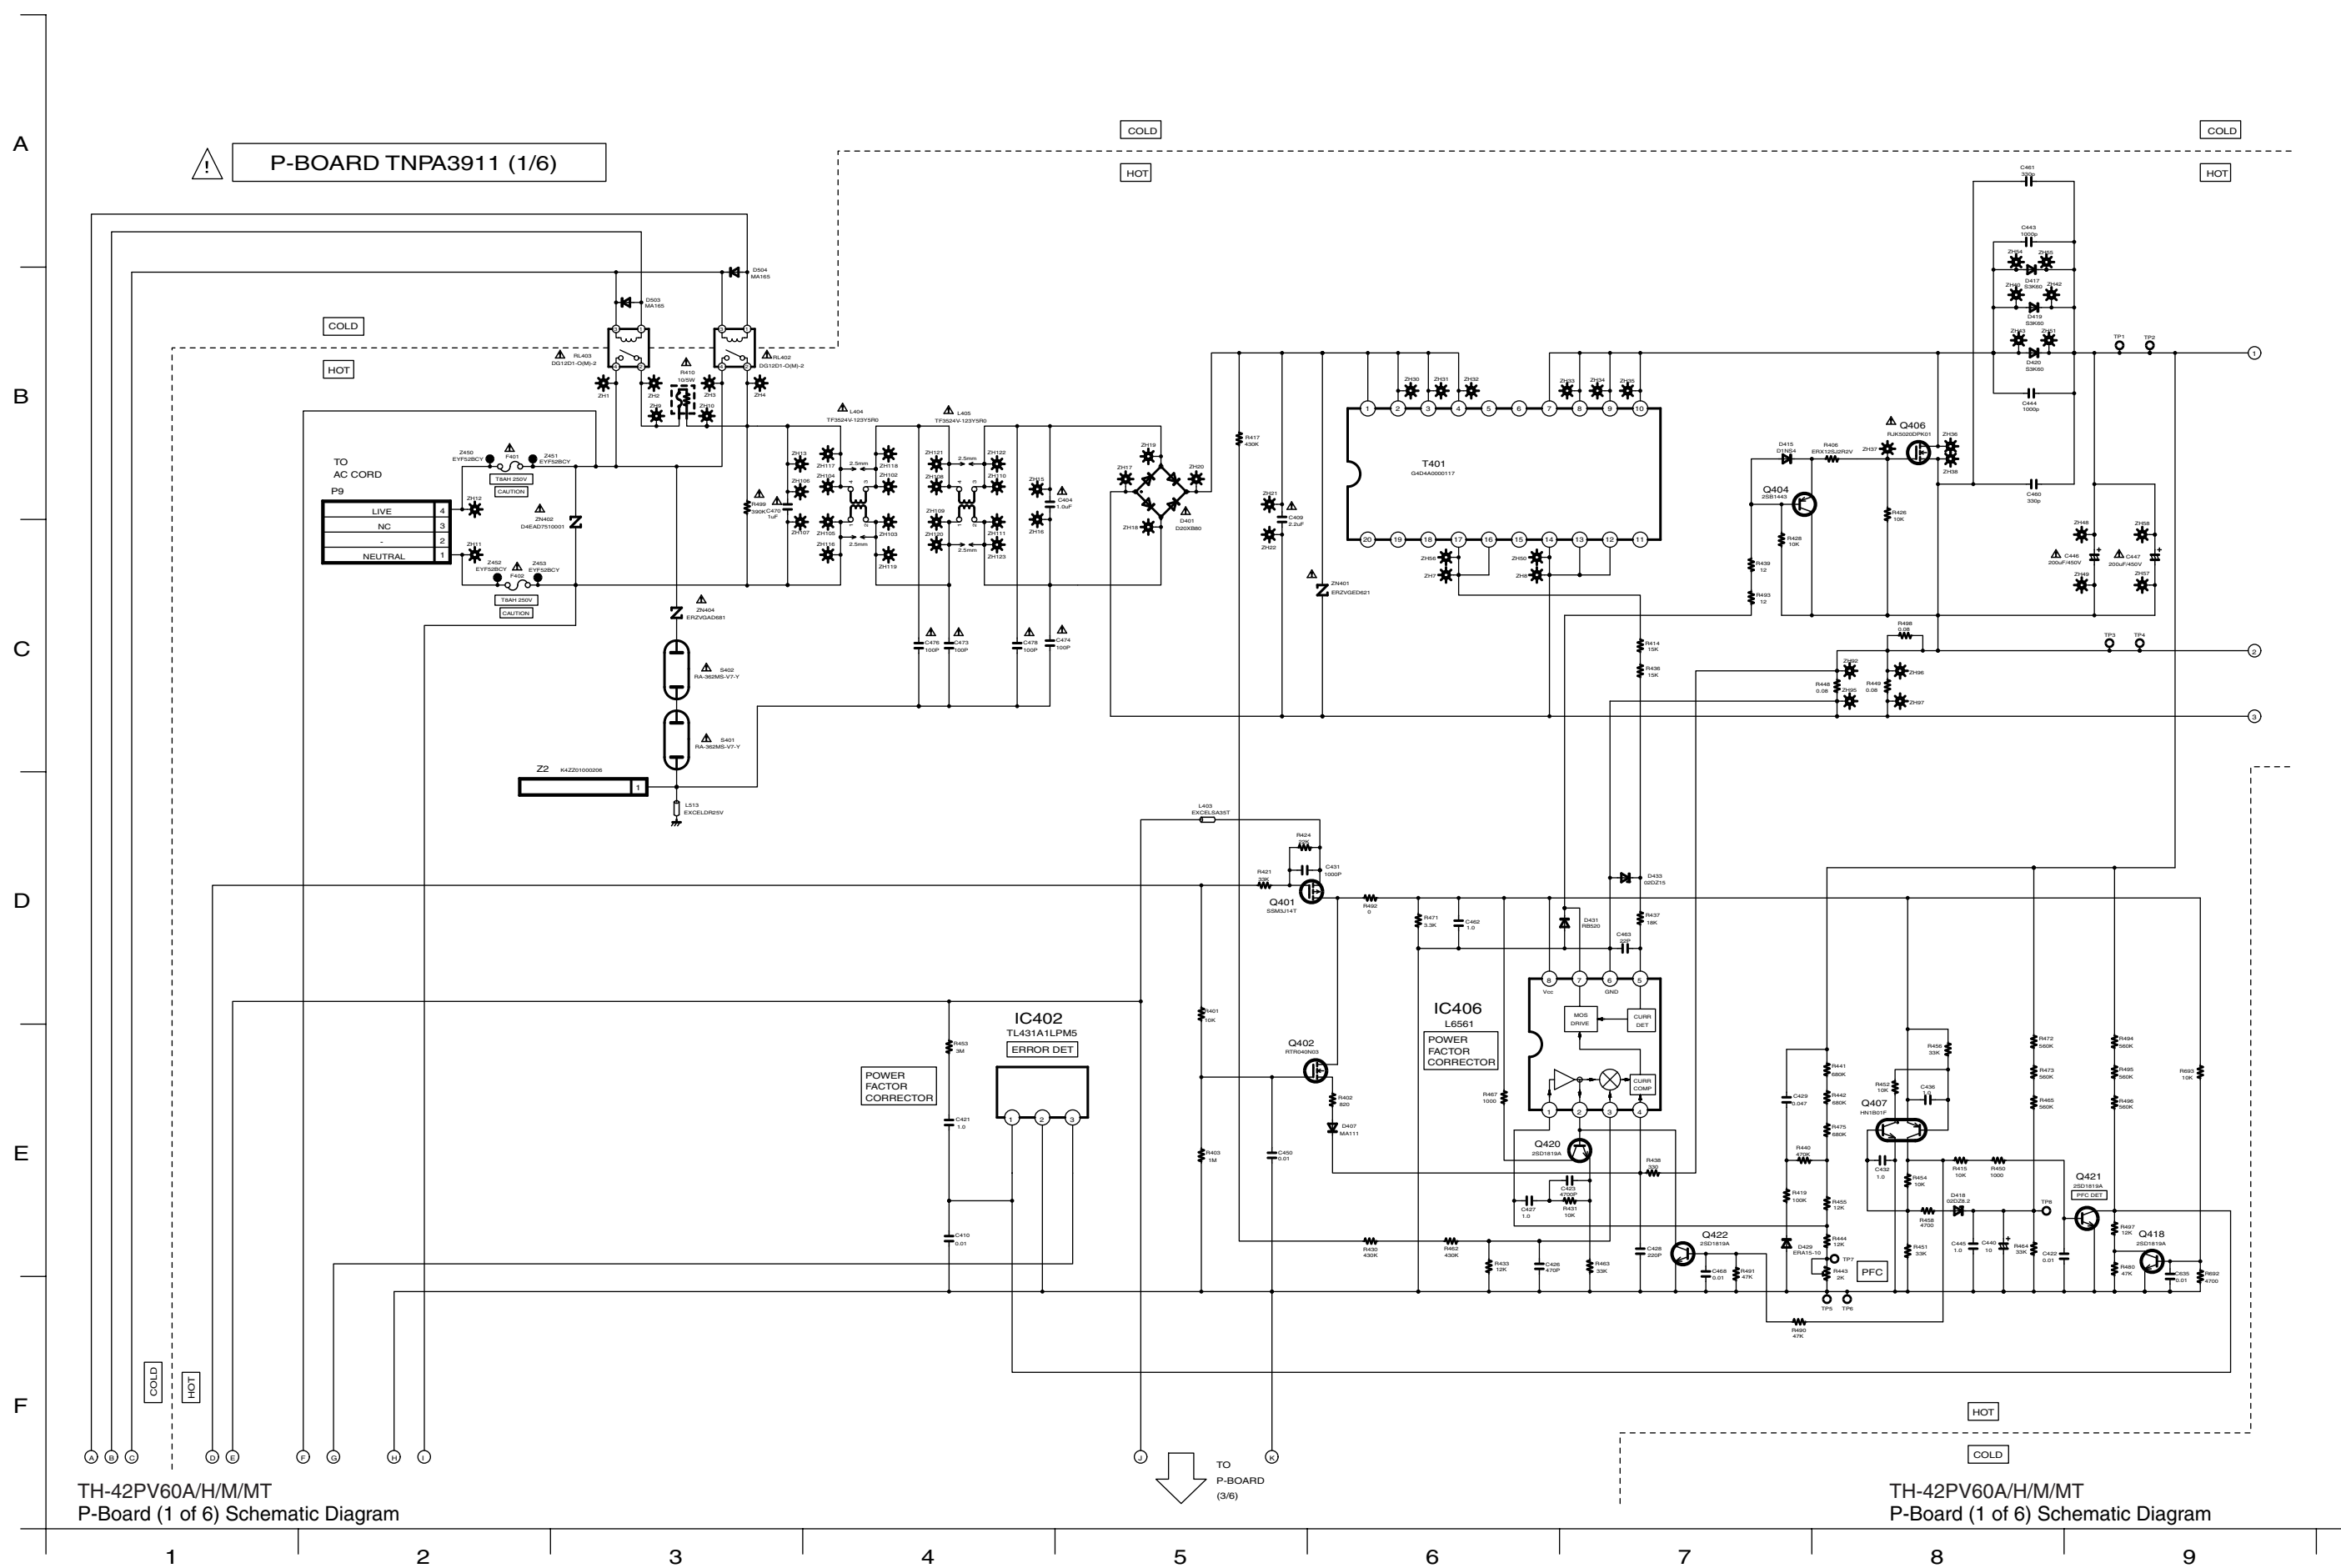




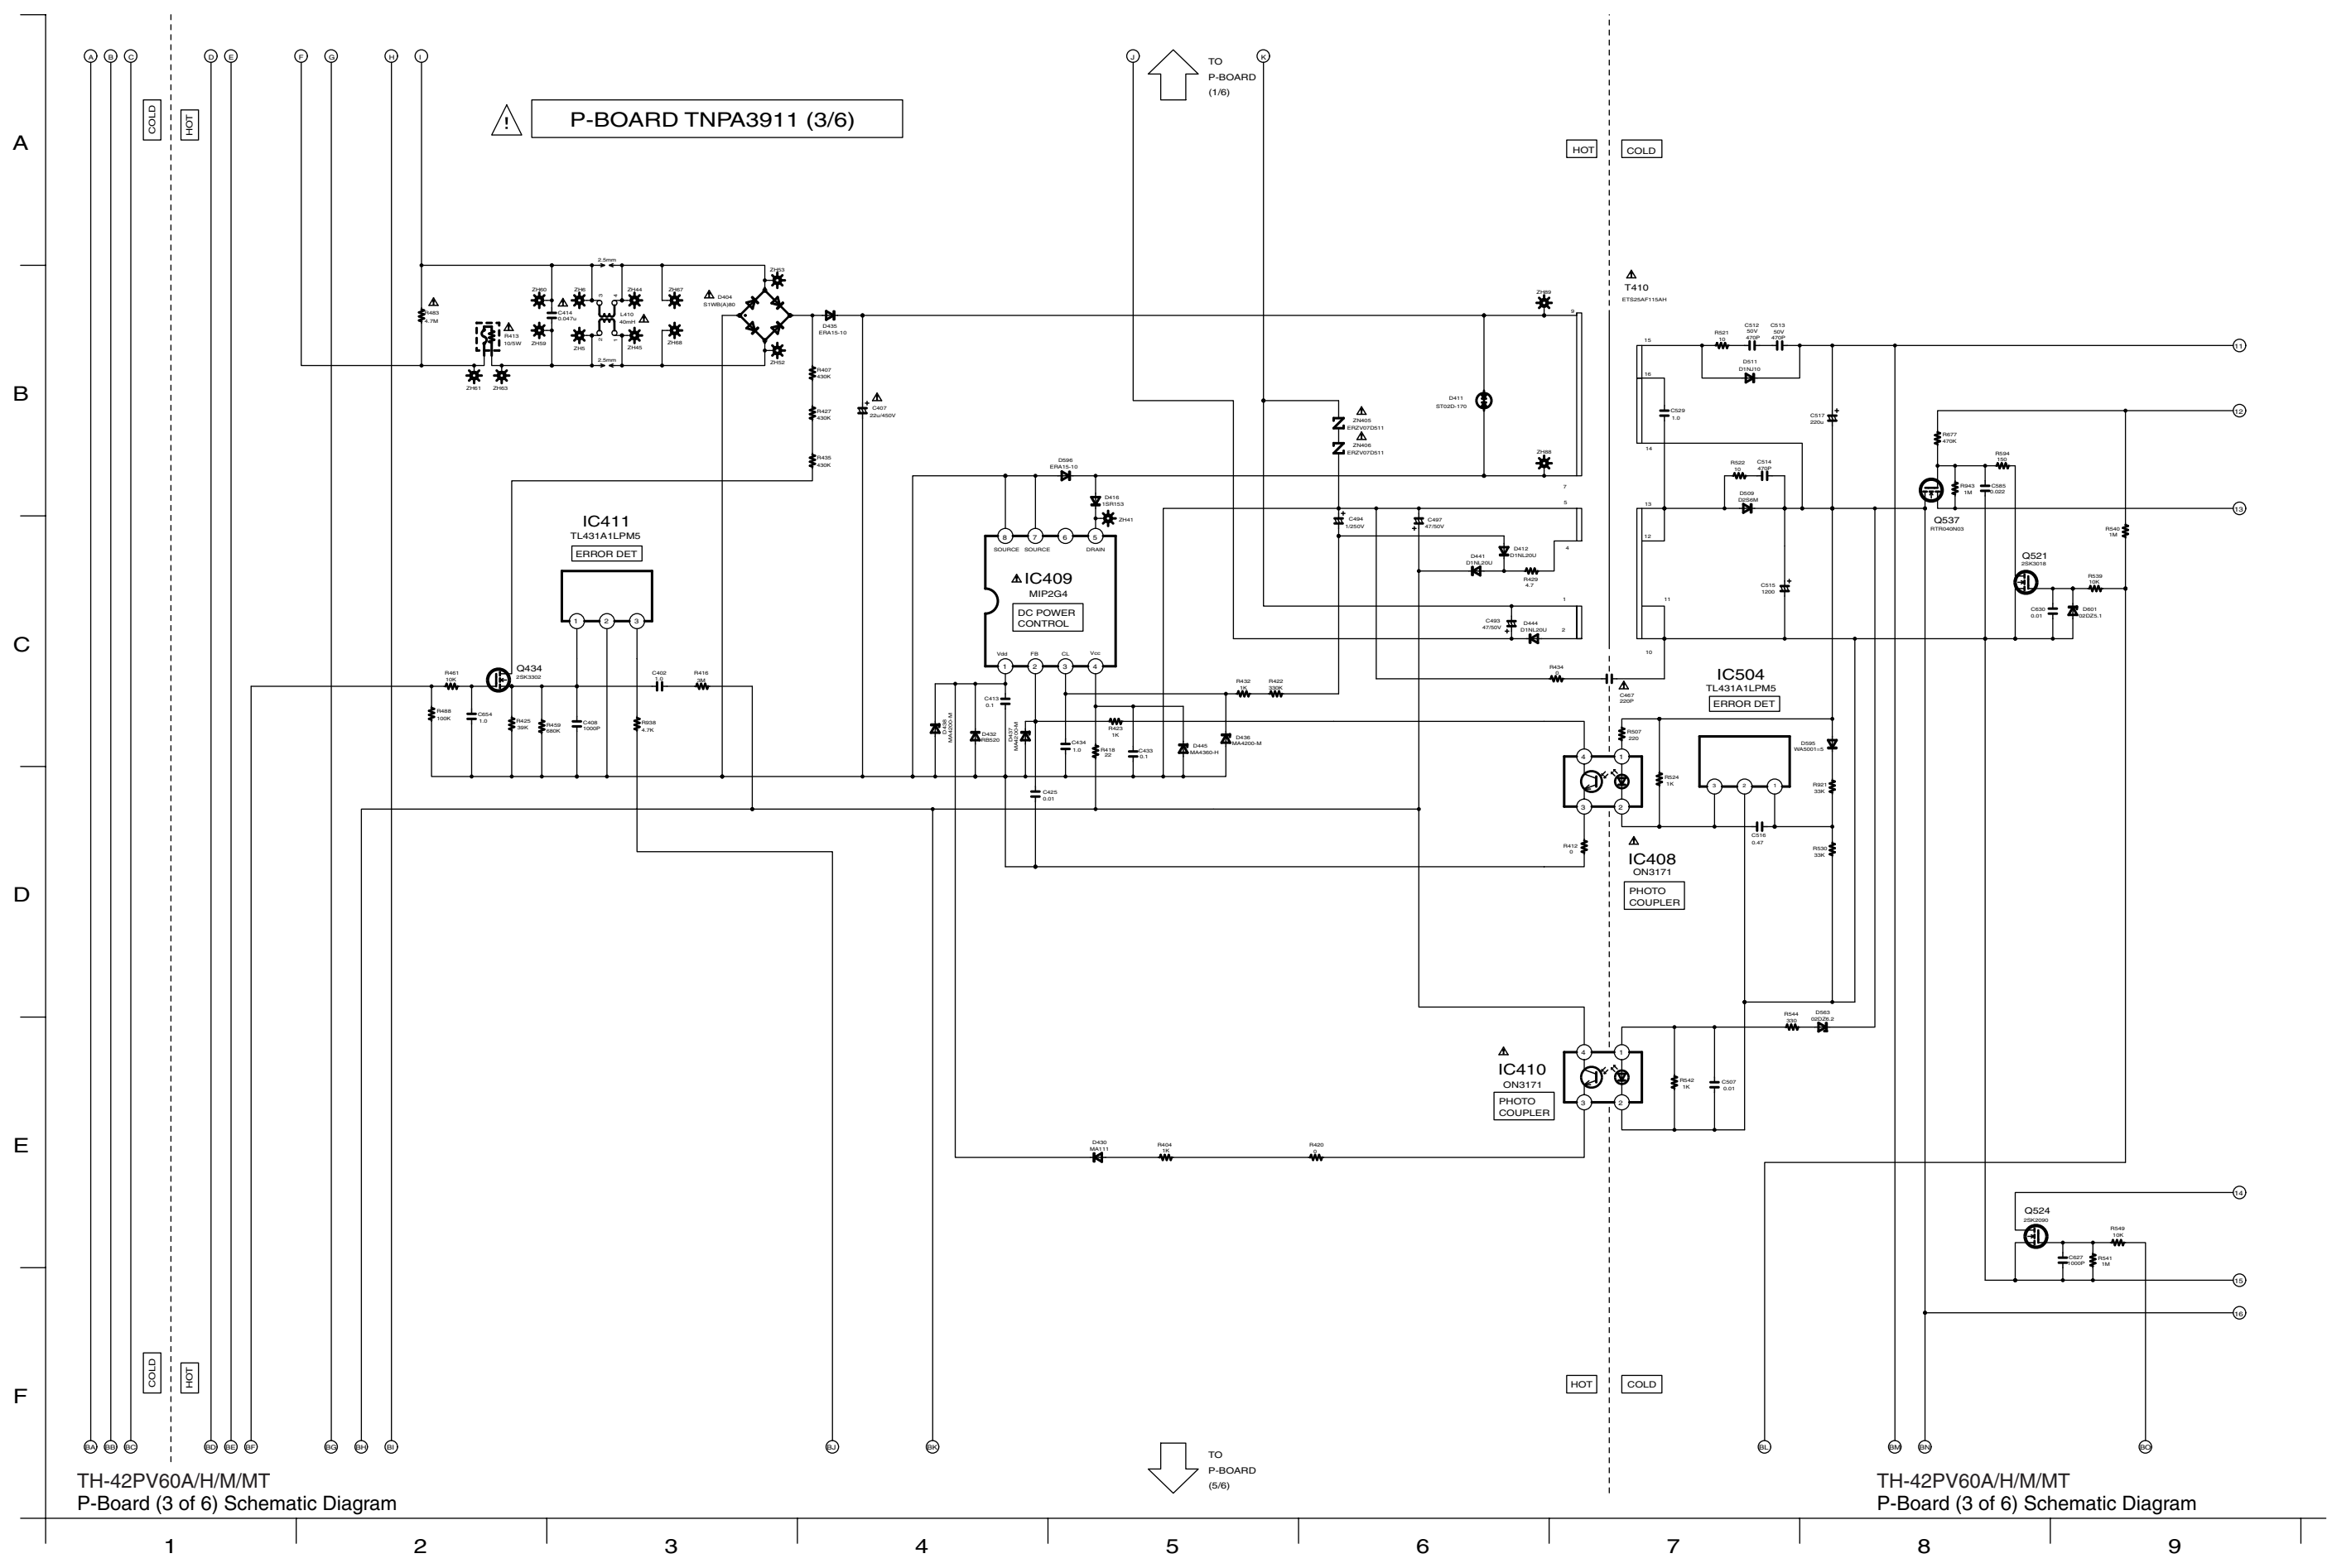






TH-42PV60A/H/M/MT
P-Board (5 of 6) Schematic Diagram

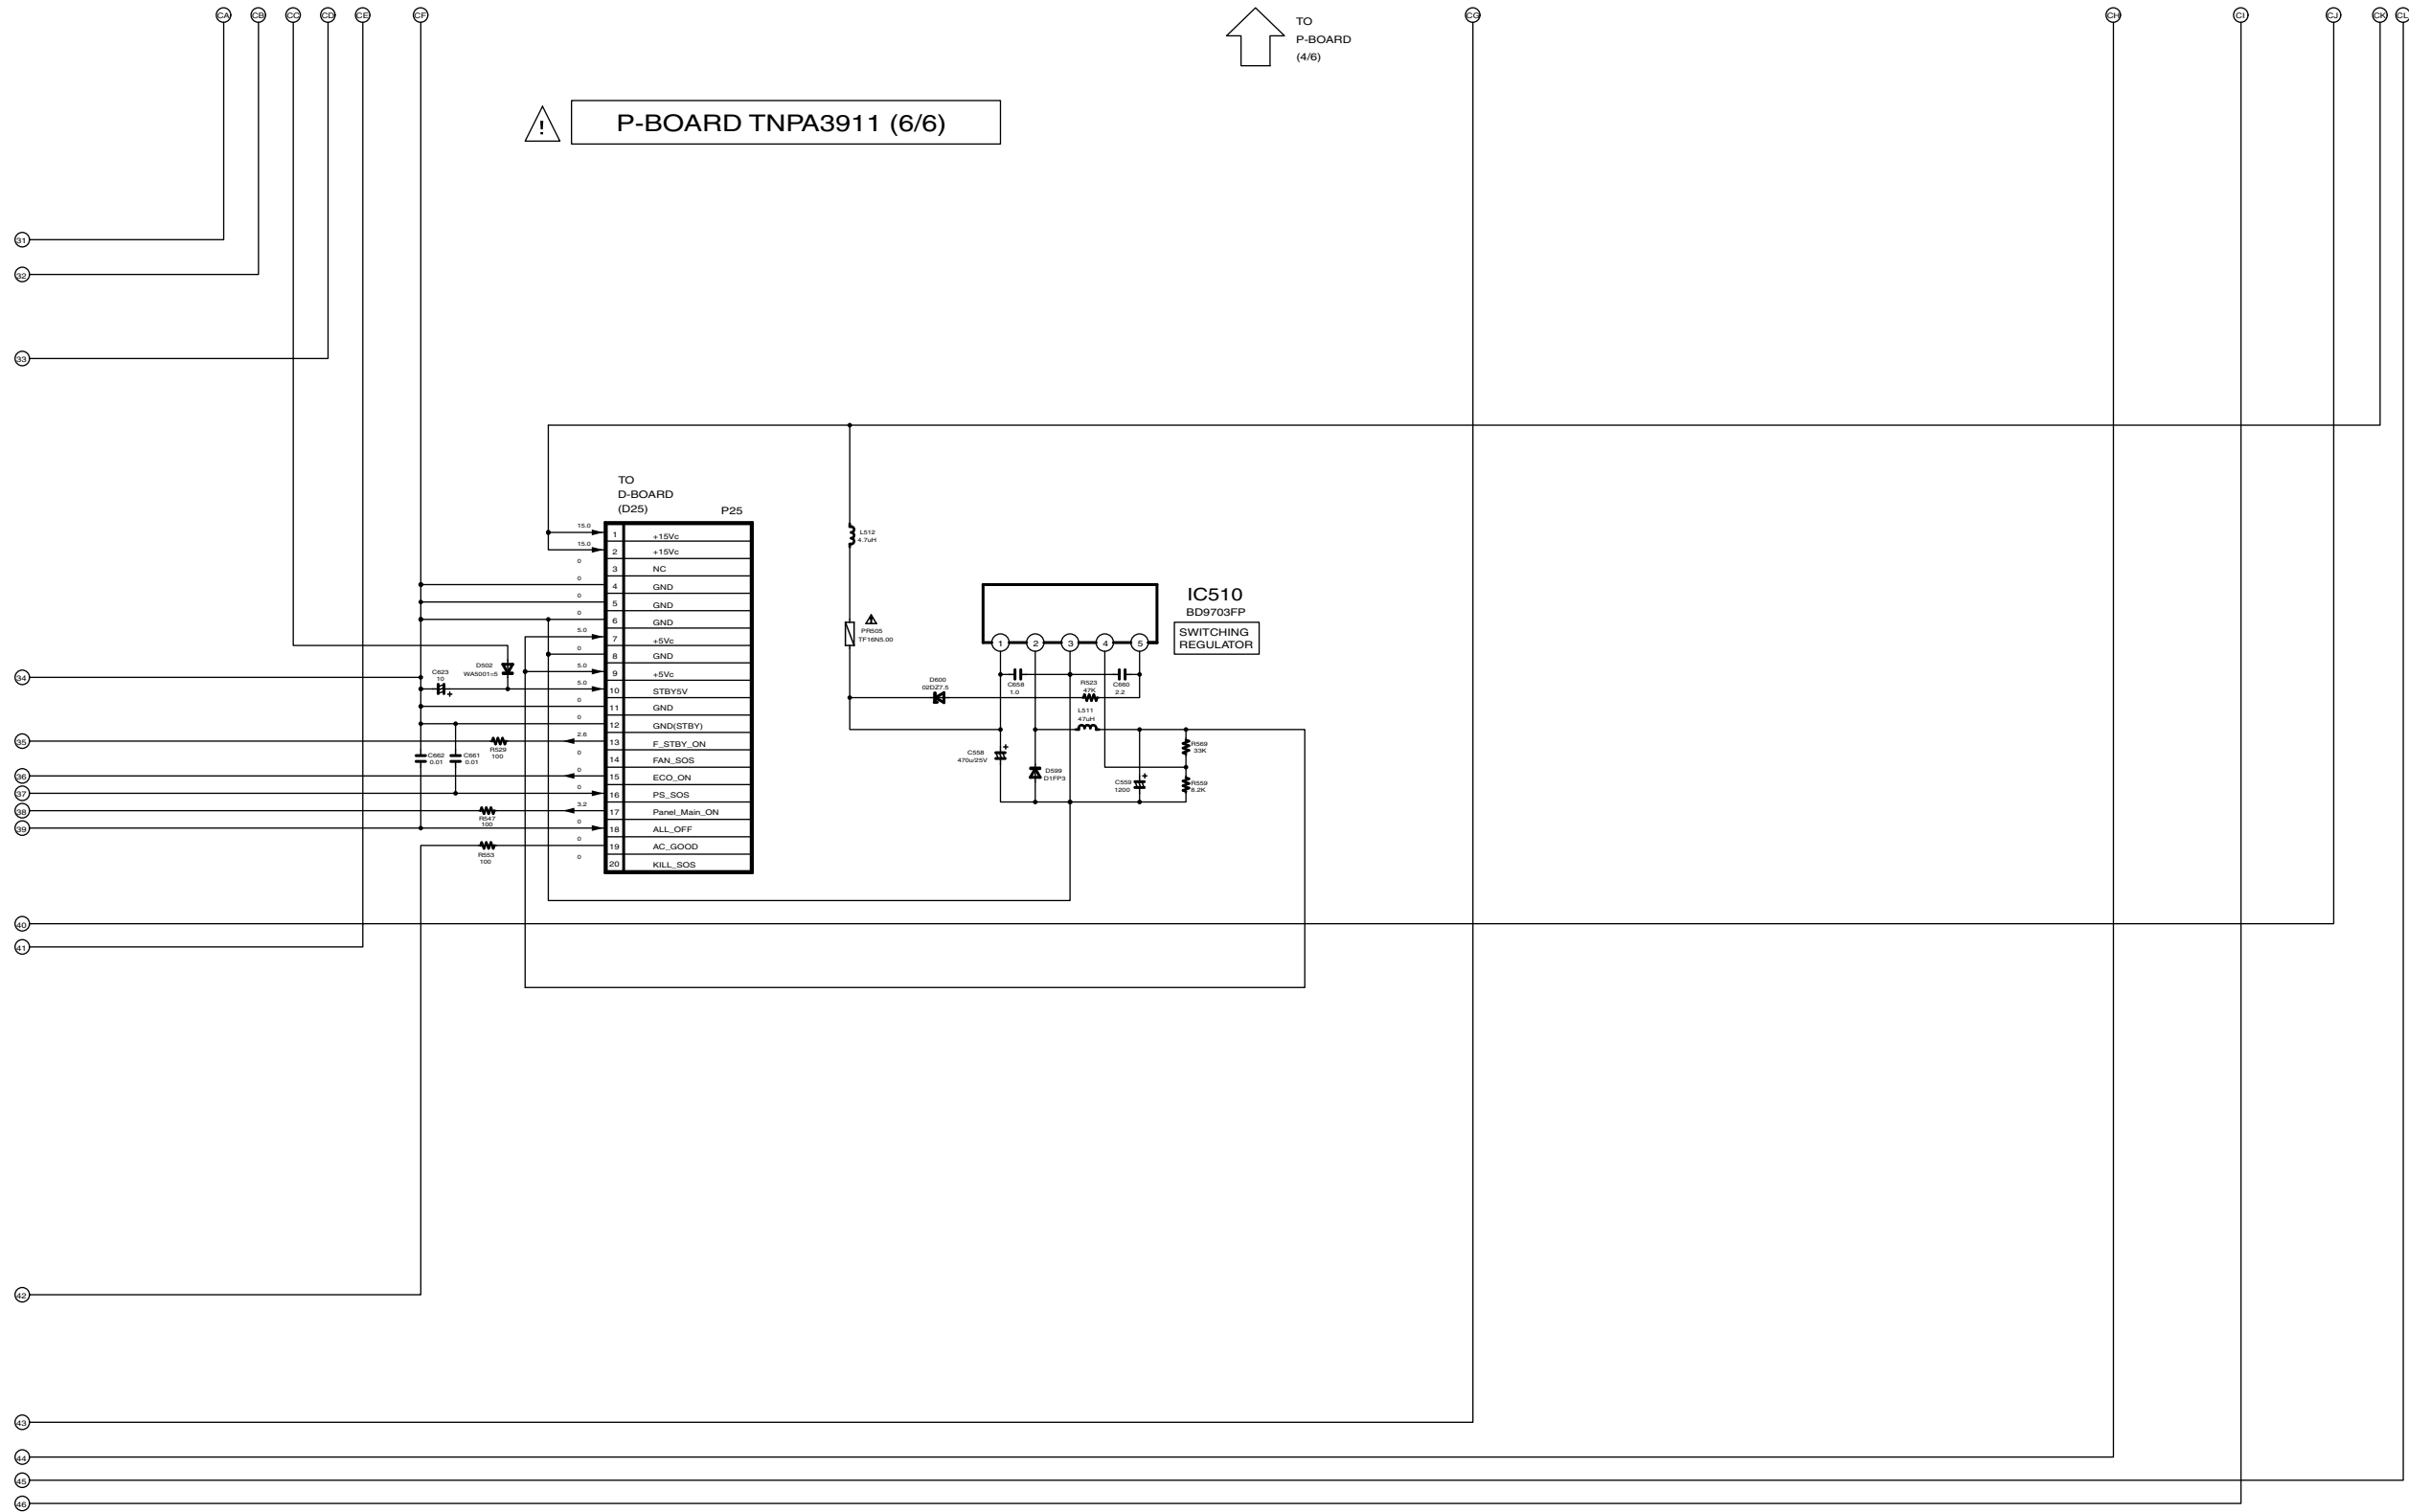




PA-BOARD TNPA3761AC (1/3)

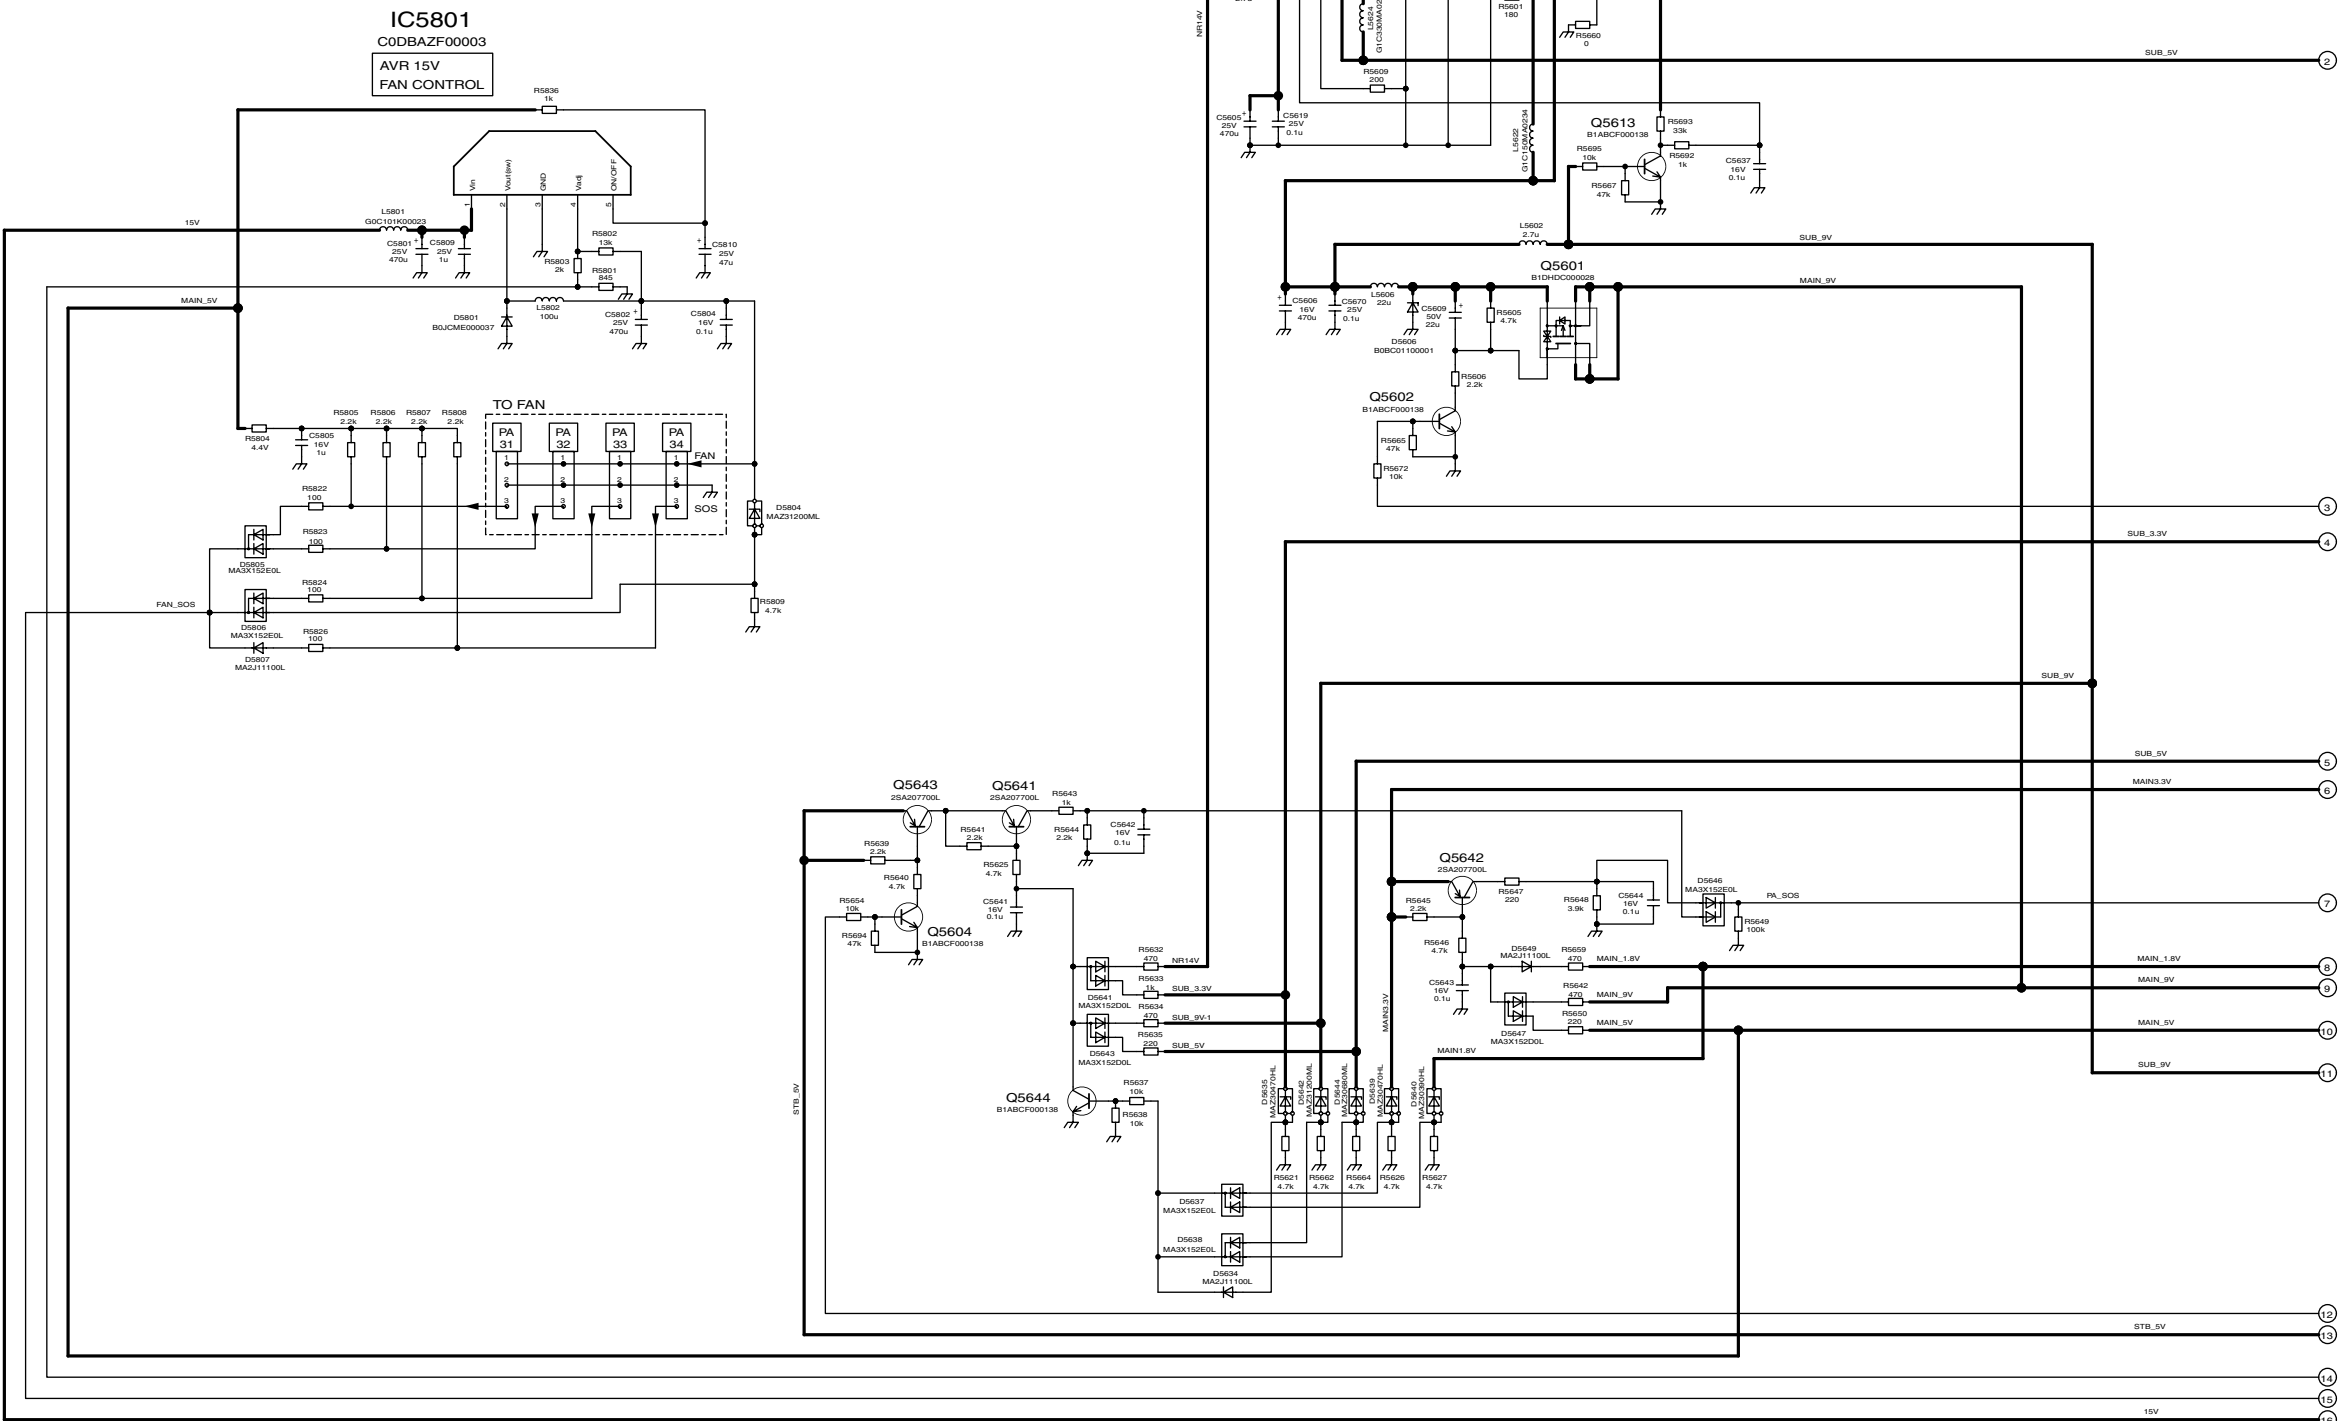

TH-42PV60A/H/M/MT
PA-Board (1 of 3) Schematic Diagram

TH-42PV60A/H/M/MT
PA-Board (1 of 3) Schematic Diagram

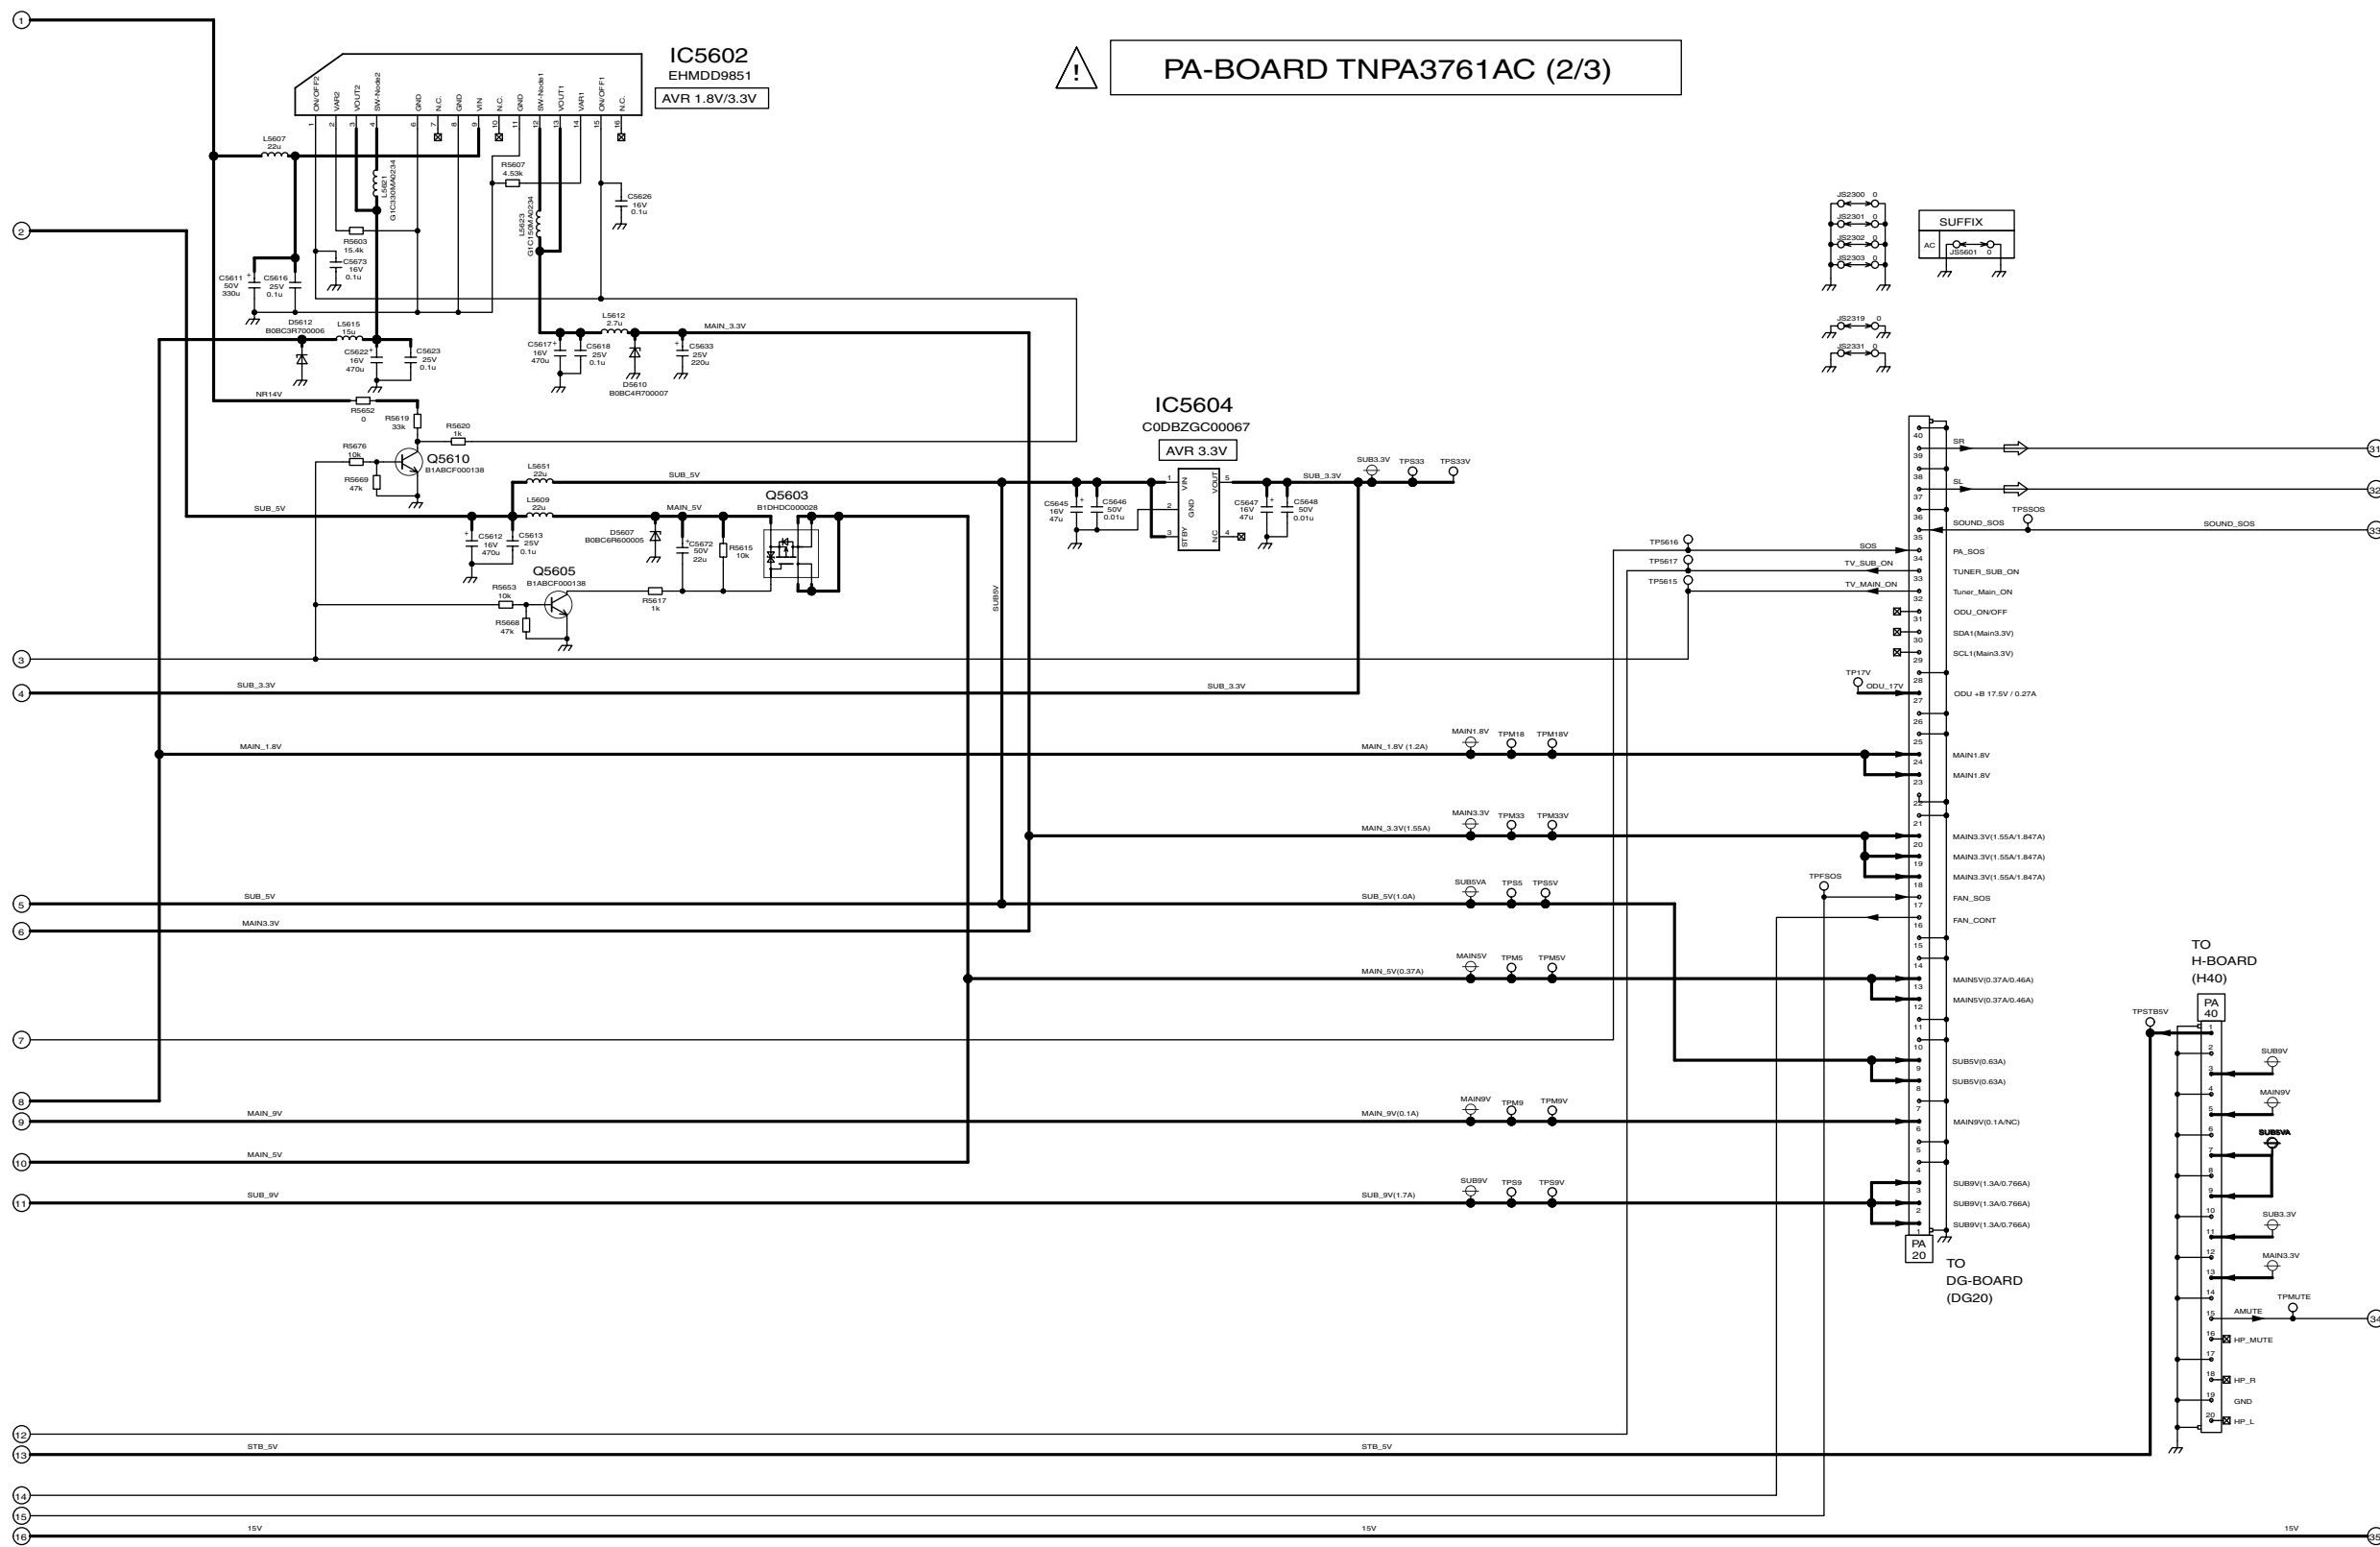

TH-42PV60A/H/M/MT
PA-Board (2 of 3) Schematic Diagram

TH-42PV60A/H/M/MT
PA-Board (2 of 3) Schematic Diagram